
т <u></u>	m	D	0	Φ]
A Z ØS							4
	The second secon		LAYOUT SHOW	N AS EXAMPLE			3
	hown as example						
-Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal						
-Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum	Source of the products which does not comply with does not comply does not comply does not comply does not comply with does not comply does						2
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D!	521F77SN			
-Temperature Range -65°C to +200°C		A 06-10-2016	First Release				
-Salt Spray : 48 hours		ISS DATE	Latest modification - by			MOD N°	
		Designed By:	Date:	CL	ISTOMER DRAWING		
		TITLE	TLE Aluminium Plug 8D series				
BASIC SERIES: 8D 5 - 21 F 77 S → SHELL TYPE : Plug with RFI Shielding	N	SCALE	General General Toleran	ces:	NPRDS / PROJECT 859		
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	L ORIENTATION : N CONTACT TYPE : SOCKET(500 Matings)	- SUURIAU	WWW.SOURI	AU.COM	This document is the proper SOURIAU it must not be reproduced communicated without perm	d or	
PLATING : F = Nickel	CONTACT LAYOUT : 21-77	•	SOUR	IAU DRG N°		SHEET	
		A3		21F77SN-C		1/2	
H G F	E	D	С	В	A		

	Ŧ	D		т	m	0	
4		Contact Layout 77 77 77 77 77 77 77 77 77 77 77 77 77					
C)	Ctc A B C D E F G H J K L N N P R S T	21-77 X 1.96 5.46 8.51 10.46 10.46 8.51 5.46 1.96 0 -1.96 -5.46 -8.51 -10.46 -8.51 -10.46 -8.51 -5.46 -8.51 -1.96	Y 8.38 7.67 5.79 2.82 -2.82 -2.82 -5.79 -7.67 -8.38 -5.41 -8.38 -5.41 -8.38 -7.67 -5.79 -2.82 2.82 5.79 7.67 8.38			due to a us the Specification (profes	not be liable for any e of the Products whi is issued by either of sional recommendati Country FR PN: 8D521F
	U V	-4.57 4.57 G	0	F	E	10-2016 First Release DATE Latest modificat Date: LE	ion - by

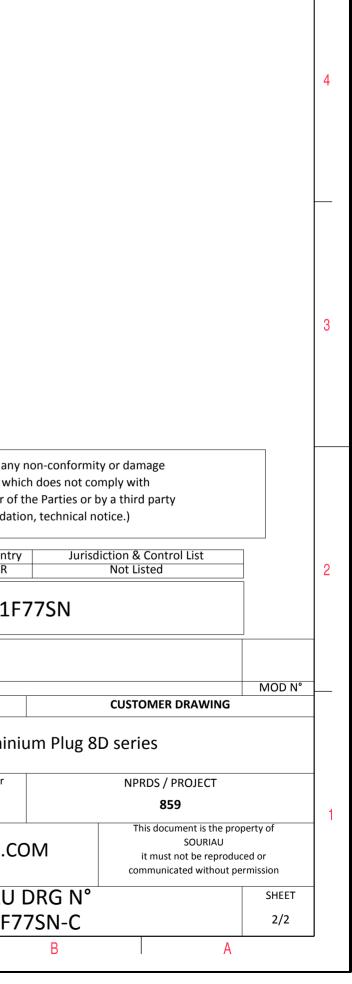

Þ

σ