



Electrical Specifications

Insertion Loss: 1.25 dBa Max @ 2300-3800 MHz
Min

Return Loss: 14 dB Min @ 2300-3800 MHz Min

In/Out Impedance: 50 Ohms

Rejection: >3 dBc @ 4100 MHz

>20 dBc @ 4230 MHz

>30 dBc @ 4250 MHz

>60 dBc @ 4600-18000 MHz

Mechanical


Connector Type: 0.018" dia. axial RF Pins
In/Out

Dimensions: 1.025 x 0.40 x 0.27 Inches

Environmental


Operating Temperature: -40 to +70° C

Outline Drawing:

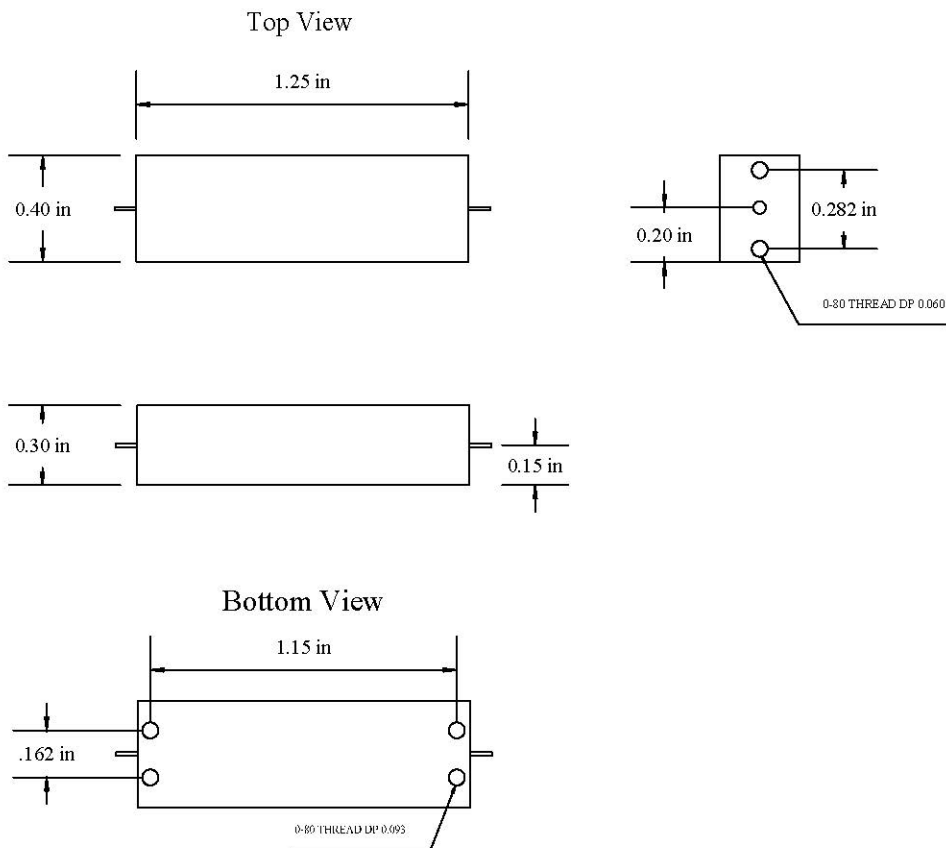



Response Plot:

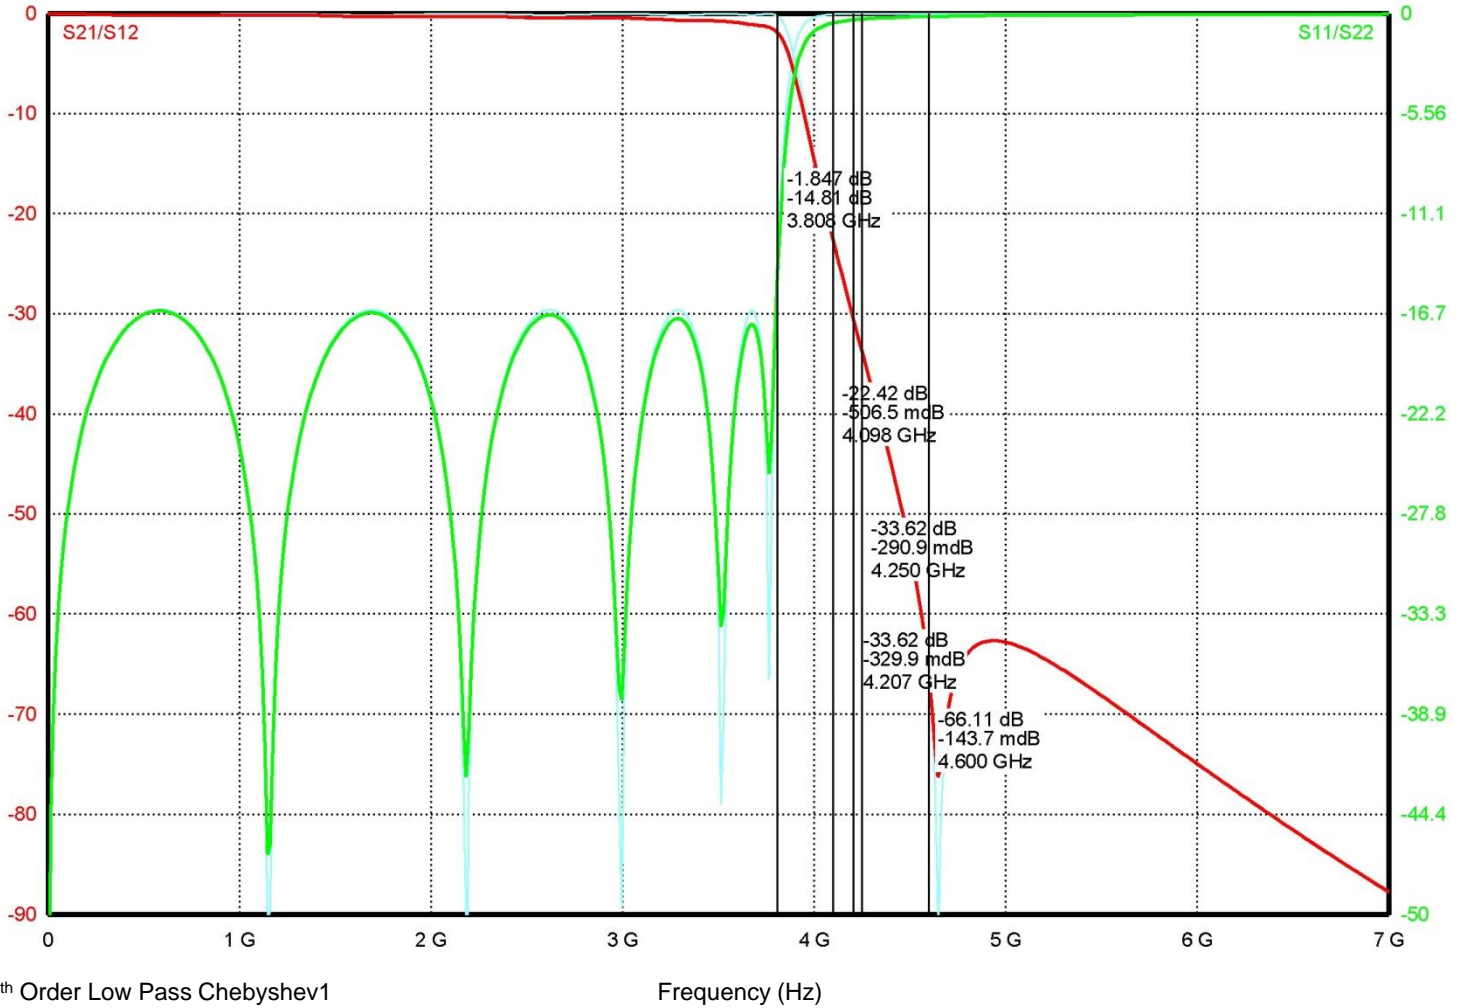

Note: This is a simulation plot. Actual results may differ once the product is implemented.