

Contact Dimensions: 540-Wire Wrap .025 Sq.(0.64 Sq.) - Tail LG=.560(14.22) .100 (2.54) Contact Spacing x .200 (5.08) Row Spacing



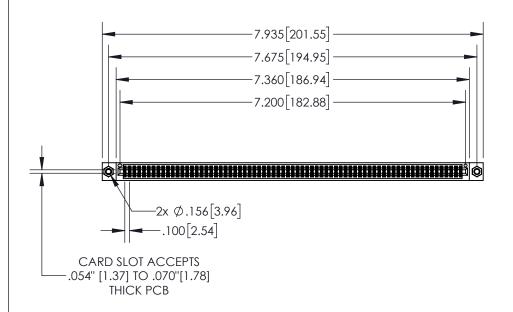

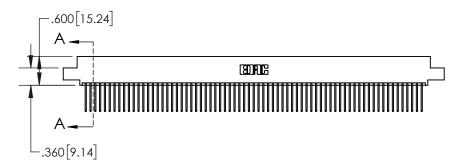

1

	.330[8.38] CARD SLOT		
-	.370[9.40]		
	SECTION A-A		
.150 [3.8]	.160[4.06] POINT OF CONTACT		
-	200[5.08]		

DRAWN: R.STA.MONICA

845/895 SERIES HIGH TEMP CARD EDGE CONNECTOR PART NUMBER: 895-142-540-507

NG YOUR CONNECTION TO QUALITY & SERVICE

CANADA

1:2 SHEET 1 OF 2 845-ENG-MASTER

845-ENG-MASTER

DATE:MAY.16/2017

•	INSULATOR MATERIAL, ITTERMOTEASTIC, UL 74V-U
•	CONTACT MATERIAL; COPPER TIN ALLOY
	CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING
	ON THE CONTACT TAILS, NICKEL UNDERPLATE

INICILI ATOD MAATEDIAL. THEDMODIACTIC III OAVA







INSULATOR MATERIAL: THERMOPLASTIC POLYESTER, UL 94V-0 DAP MATERIAL AVAILABLE UPON REQUEST

Contact Code 558

CONTACT MATERIAL; COPPER ALLOY CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING ON THE CONTACT TAILS, NICKEL UNDERPLATE

845/895 SERIES HIGH TEMP CARD EDGE CONNECTOR CONTACT CODE 555,556,558,559,560 DIMENSIONS

YOUR CONNECTION TO QUALITY & SERVICE

Contact Code 559

	ACAD REFERENCE NO	. 845-ENG-MASTER
	DRAWN: R.STA.MONICA	DATE:MAY.16/2017
	CHECKED:	DATE:
	SCALE: 1:1	SHEET 2 OF 2
D	DRAWING NUMBER	ISSUE

Contact Code 560

845-ENG-MASTER