

—				
	<u> </u>	 	U	



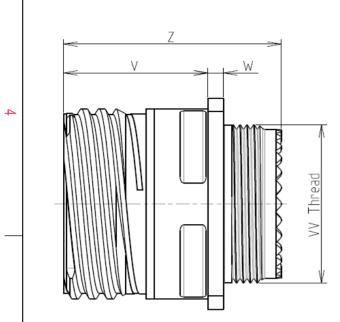

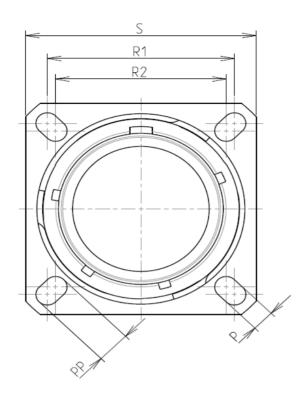

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

Н

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel				
	-Shell Plating	: Nickel				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer				
Ν	-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
	-Durability	: 500 Mating cycles				
	-Delivered without Souriau contacts					
	-Temperature Range	65°C to +200°C				
	-Salt Spray	: 500 hours				

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
РР	4.93±0.2				
R1	20.62				
R2	18.26				
S	26.2±0.3				
V	20.83+0/-1.25				
W	2.1/2.5				
Z	31.5 Max				
VV THREAD	M15x1-6g				


Delivered W/O Contacts


CONTACT LAYOUT : 11-01

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : D



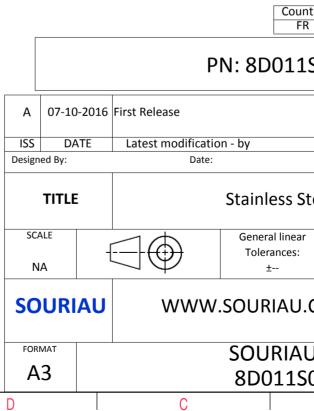

/									
-Mass	: 28.87 g ± 1	0%							
BASIC SERIES:		8D 0	-	11	S	01	Р	D	L
SHELL TYPE : Squa	re Flange Recepta	acle							
CONTACT TYPE :	Standard Crimp C	ontact							
SHELL SIZE : 11									
PLATING : S =	Nickel								

F

G

	Φ		A			
	Re				4	
as exa	AMPLE				3	
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical n Jurisd	mply with by a third par	ty trol List		2	
		CUSTOME	R DRAWING	MOD N°		
Stee	el Recepta	cle 8D se	eries			
ar :			/ PROJECT 8 59		1	
J.CC	This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° LPDL-C			SHEET 1/2		
	B		A		J	

		۵	г т	m		0
		Contact Layout				Panel Cutou
4		01			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	(1#12	٦		₹ 22	
ى	Ctc A	11-01 X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of
Ø						(professional recommendat
					ISS DATE Designed By:	16 First Release Latest modification - by Date:
→					SCALE NA	Stainless Ste General linear Tolerances: ±
					FORMAT A3	SOURIAU 8D011S0
	Н	G	l F	E	D	C

