
<u>т</u>	۵	וד	m	D		0	σ	A	
		ØS					WWN AS EXAMPLE		
		Keying Showr	as example						
CHARACTERISTICS			Connector dimension]					
Standard : Based on MIL-E			Dim Nominal ØS 35.7 Max						
-Shell Plating : V -Insulator : T	omposite /ithout Plating nermoplastic opper Alloy		Z 31 Max VV THREAD M25x1-6g]	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
	licon Elastomer old over copper Alloy 0.8μm minimu	m						on & Control List ot Listed	
_	00 Mating cycles								
-Delivered with Souriau co	tacts and Accessories					PN: 8[0517X75AD		
	55°C to +175°C			-	A 18-10-20	016 First Release			
	000 hours 1.3 g ± 10%				S DATE				MOD N°
191035 . 3	1.5 B ± 10/0				igned By:	Date:	C	USTOMER DRAWING	
					TITLE Composite Plug 8D series				
BASIC SERIES:	8D 5 - 17	X 75 A D			SCALE NA	-{	al linear rances: ±	NPRDS / PROJECT 859	
SHELL TYPE : Plug with RF								This document is the prope	erty of
CONTACT TYPE : Standar SHELL SIZE : 17			CONTACT TYPE : PIN(50		OURIA	U WWW.SOUR	IAU.COM	SOURIAU it must not be reproduce communicated without perr	
PLATING : X = With	out Plating		CONTACT LAY		ORMAT		RIAU DRG N°		SHEET
		I		001.1/-/5	A3		517X75AD-C		1/2
			I	1	1				

_	Ŧ	۵	г П	m	D	0
4		Contact Layout 75				
_	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75				
ω						
	_					SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat
N					A 18-10-20	PN: 8D517)
_					ISS DATE Designed By: TITLE	Latest modification - by Date: Compo
					SCALE NA SOURIAU	
		1		7	A3	SOURIAU 8D517X7
	Н	G	l F	E	D	C

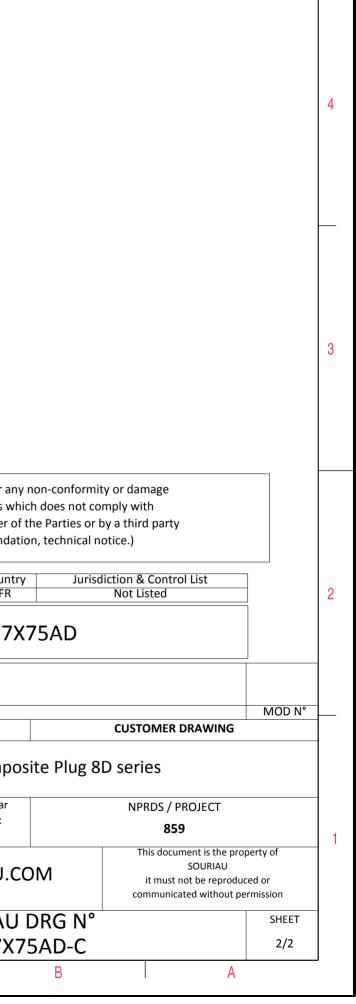

 \triangleright

σ