


## **BU-P2451**

**(BNC Female Panel Receptacle)**

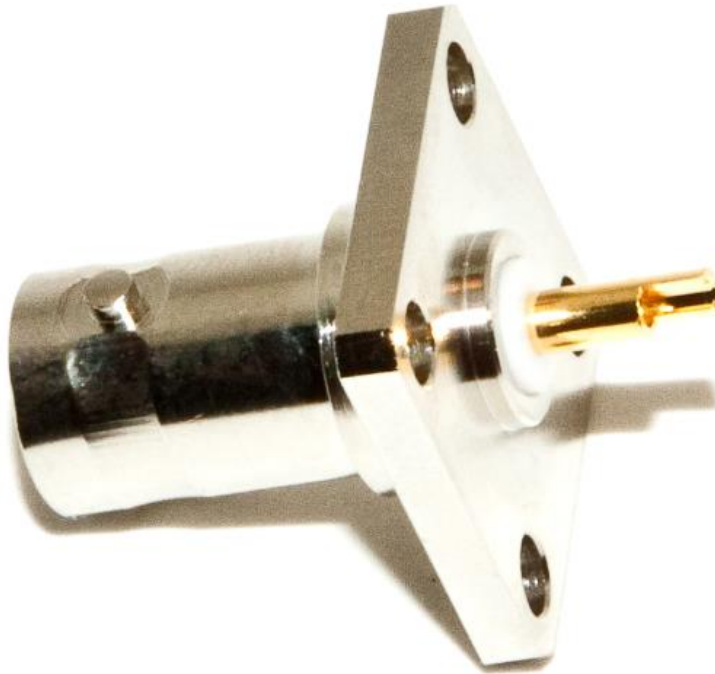

- Mueller's BU-P2451 is used as a BNC female receptacle that can be mounted to a panel with 0.53" (12.7mm) spacing between each hole.
- Material:   Body                                   Brass, tarnish-resistant plating  
                  Center contact                       Gold-plated beryllium copper  
                  Dielectric                               PTFE
- Rating       Nominal Impedance       50 Ohms  
                  Voltage                               30VAC/60VDC max, shield/earth  
  500 VRMS inner conductor/shield  
                  Temperature                       -65°C (-85°F) to 165°C (329°F)
- RoHS 3 compliant, exemption 6c