

YHV280-2PM-P-4MM-B ✓ ACTIVE

TE Internal #: YHV280-2PM-P-4MM-B

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 2 Position, .409 in [10.4 mm] Centerline, Sealable, Orange, Signal

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings



Connector & Housing Type: **Housing for Female Terminals**

Mating Tab Width: **2.8 mm [.11 in]**

Connector System: **Wire-to-Board, Wire-to-Device**

Number of Positions: **2**

Centerline (Pitch): **10.4 mm [.409 in]**

Features

Product Type Features

| | |
|--------------------------|-------------------------------|
| Connector Shape | Rectangular |
| Connector & Housing Type | Housing for Female Terminals |
| Connector System | Wire-to-Board, Wire-to-Device |
| Sealable | Yes |
| Hybrid Connector | No |
| Primary Locking Feature | On the Terminal |

Configuration Features

| | |
|---------------------|---|
| Number of Positions | 2 |
| Number of Rows | 1 |

Electrical Characteristics

| | |
|------------------------------|---|
| Operating Voltage | 850 VDC |
| Nominal Voltage Architecture | 12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V, 240 V, 500 V, 550 V, 600 V |

Body Features

| | |
|-------------------------|--------|
| Cable Exit Angle | 180° |
| Primary Product Color | Orange |
| Connector & Keying Code | B |

Contact Features

| | |
|--------------|--------------|
| Contact Size | .63mm, 2.8mm |
|--------------|--------------|



| | |
|--------------|------------|
| Contact Type | Receptacle |
|--------------|------------|

| | |
|------------------|----------------|
| Mating Tab Width | 2.8 mm[.11 in] |
|------------------|----------------|

Mechanical Attachment

| | |
|-----------------------------|----|
| Terminal Position Assurance | No |
|-----------------------------|----|

| | |
|---------------|------|
| Strain Relief | With |
|---------------|------|

| | |
|-----------------------|-------|
| Mating Alignment Type | Keyed |
|-----------------------|-------|

| | |
|------------------|------|
| Mating Alignment | With |
|------------------|------|

| | |
|-------------------------|----------------------------|
| Connector Mounting Type | Cable Mount (Free-Hanging) |
|-------------------------|----------------------------|

Housing Features

| | |
|------------------|-------|
| Housing Material | PA GF |
|------------------|-------|

| | |
|--------------------|------------------|
| Centerline (Pitch) | 10.4 mm[.409 in] |
|--------------------|------------------|

Dimensions

| | |
|------------------|-------------------|
| Connector Height | 27.6 mm[1.087 in] |
|------------------|-------------------|

| | |
|---------------|-------------------|
| Product Width | 55.3 mm[2.177 in] |
|---------------|-------------------|

| | |
|----------------|-------------------|
| Product Length | 32.9 mm[1.295 in] |
|----------------|-------------------|

Usage Conditions

| | |
|-----------------------------|---|
| Operating Temperature (Max) | 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F] |
|-----------------------------|---|

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 125 °C[-40 – 257 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

| | |
|----------------------|--------|
| Degree of Protection | IP6K9K |
|----------------------|--------|

| | |
|------------------------|---------|
| UL Flammability Rating | UL 94HB |
|------------------------|---------|

Other

| | |
|-------------|-----|
| Serviceable | Yes |
|-------------|-----|

| | |
|--------------------------------------|-----|
| Connector Position Assurance Capable | Yes |
|--------------------------------------|-----|

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

| | |
|------------------------------|-----------|
| EU RoHS Directive 2011/65/EU | Compliant |
|------------------------------|-----------|



| | |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Not reviewed for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2103124-2
HVA280 2P HEADER ASSY, KEY B

Customers Also Bought



TE Part #182641-1
17-14 CPC SQ FLANGE RECPT RS




TE Part #2103124-2
HVA280 2P HEADER ASSY, KEY B



TE Part #2098164-1
Cover, 60 Position PDM



TE Part #2297813-3
BASE ASSY, 27 POSN ISO FUSE AND RELAY

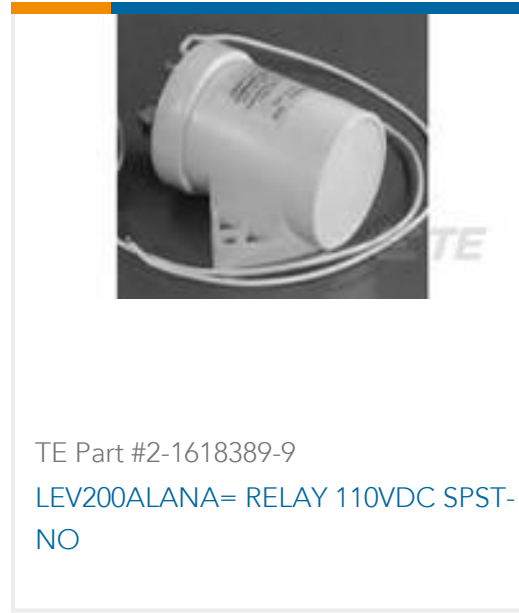

Documents

Product Drawings

[HVA280-2phm,pass,4sqmm,Key B](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_YHV280-2PM-P-4MM-B_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_YHV280-2PM-P-4MM-B_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_YHV280-2PM-P-4MM-B_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[HEMS Sample Kit YHV280-2pm-p-4mm-B](#)

English

Product Specifications

[Application Specification](#)

English