

6

5


4

3


2

1

FEMALE INSERT  
FACE VIEW



- 1 DRAIN WIRE
- 2 WHITE<DB>
- 3 YELLOW<DG>
- 4 BLUE <DA>

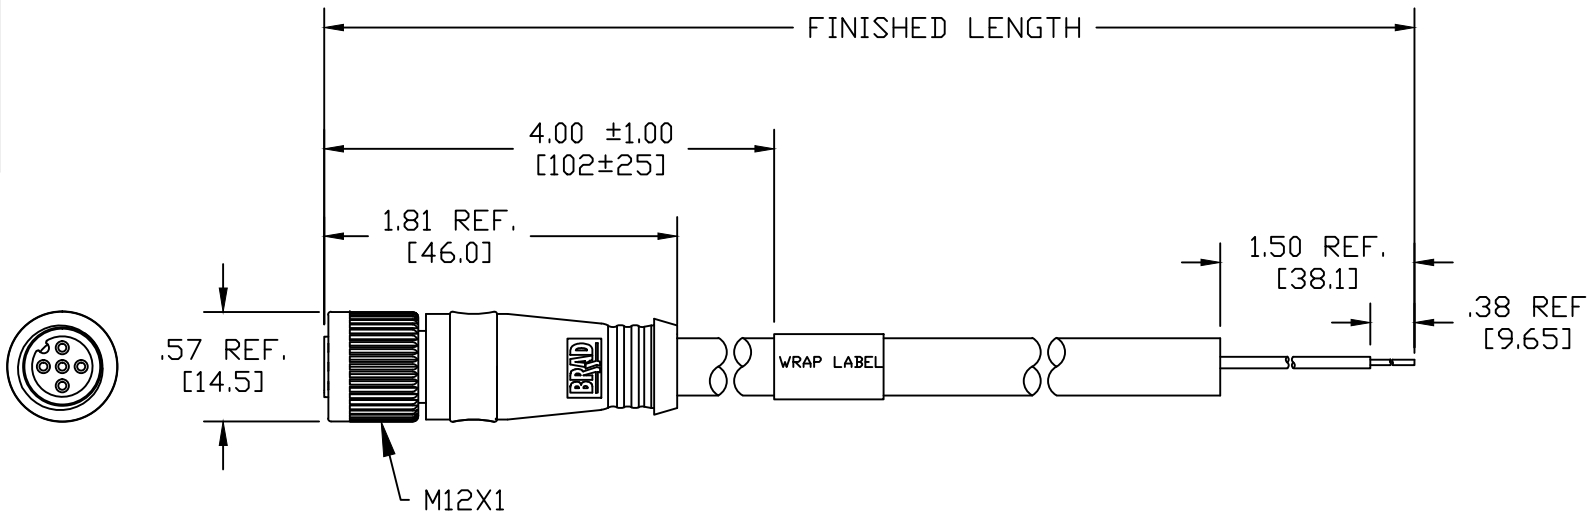

CC20A-J30-M020

Wire type  
20/3C AWG Brown  
PVC

cable length  
M020----2 Meter  
M100-----10 Meter

MECHANICAL  
 CONTACT: GOLD/NICKEL OVER COPPER ALLOY  
 INSERT : NYLON 6/6  
 O-RING: RED VITON  
 COUPLING NUT: ZINC DIECAST WITH BLACK EPOXY COATED  
 MOLDED BODY: GREY PVC  
 CABLE COLOR: BROWN  
 CABLE MARKING: FANC-110SBH KURAMO FA(JAPANESE WORDS)  
 CC-LINK Ver.1.10 KURAMO E162205-K c us AWM Style 2464  
 I A 80C 300V VW-1 FT1 LF

ELECTRICAL  
 VOLTAGE RATING: 250V AC/DC  
 AMPERAGE: 4A

ENVIRONMENTAL  
 PROTECTION: IP67 PER IEC 60529  
 IP68 PER SPEC PS-120001-001  
 OPERATION TEMP: 0°C~80°C

CABLE MARKING UPDATE EC NO: IPC2015-1192 DRWN: CAAVILES 2014/12/30 CHKD: TWOLDEGE APPR: JFMURPHY 2012/11/01	DESCRIPTION REV B	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY DATE	TITLE CC-LINK MICRO CHANGE 4-POLE FEMALE STRAIGHT 20/3C SHLDED BROWN PVC			
			4 PLACES	±---	±---	TWOLDEGE 2012/09/25				
			3 PLACES	±---	±.005	CHECKED BY DATE				
			2 PLACES	±.13	±.010	VOU	MOLEX INCORPORATED			
			1 PLACE	±.25	±.020	APPROVED BY DATE				
			ANGULAR ±.5°		JFMURPHY 2012/11/01		DOCUMENT NO.		SHEET NO.	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
							SD-130257-002		1 OF 1	

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A