


Pre-Crimped Leads >


Molex's range of pre-crimped leads offers a simple, cost-effective solution for prototyping, pre-production and mass production requirements. These leads are offered in female-to-female and male-to-male configurations in lengths of 75.00 to 600.00mm.




C-Grid III CLIK-Mate DuraClík

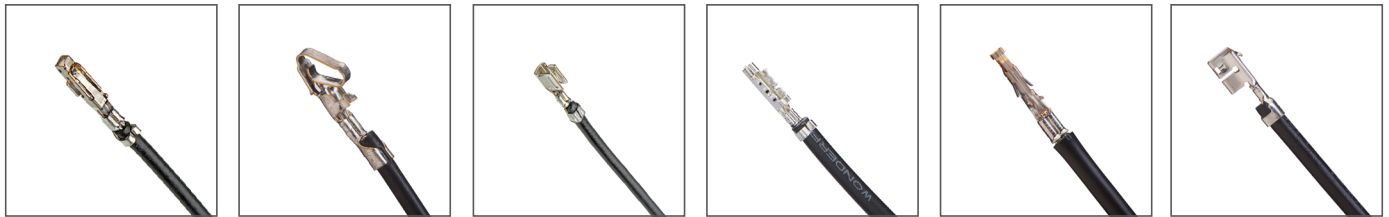

iGrid KK L1NK 250 L1NK 396 Mega-Fit MicroClasp

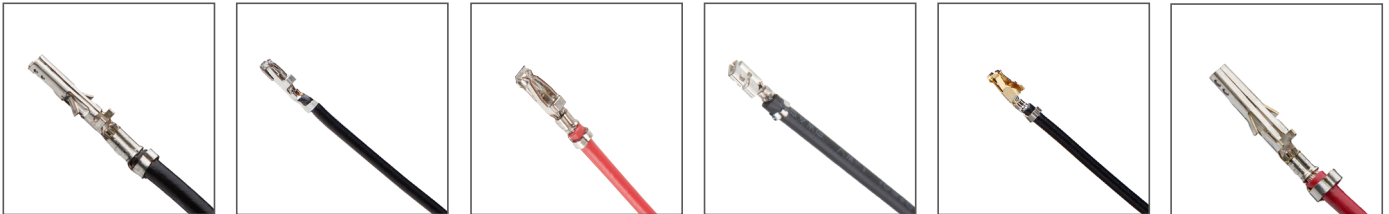


Micro-Fit 3.0 Micro-Lock Plus Micro-Lock Plus 2.0 Micro-One ISL Milli-Grid Mini-Fit

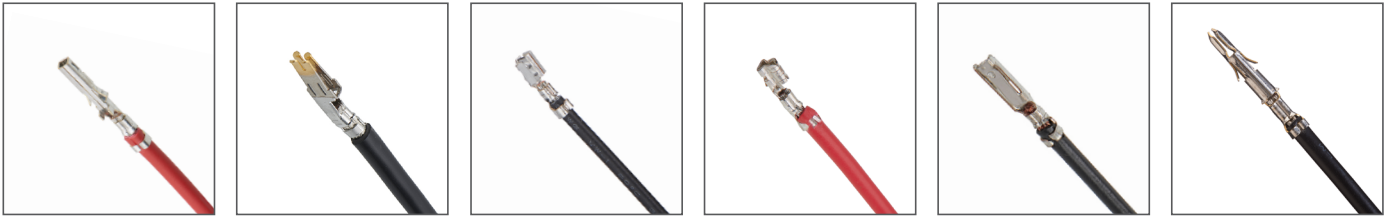

Mini-Fit Sigma Mini-Fit Sr. Mini-Lock Mini-Spox 2.5 Mizu-P25 MLX



MultiCat MX150 Nano-Fit PicoBlade Pico-Clasp Pico-EZmate

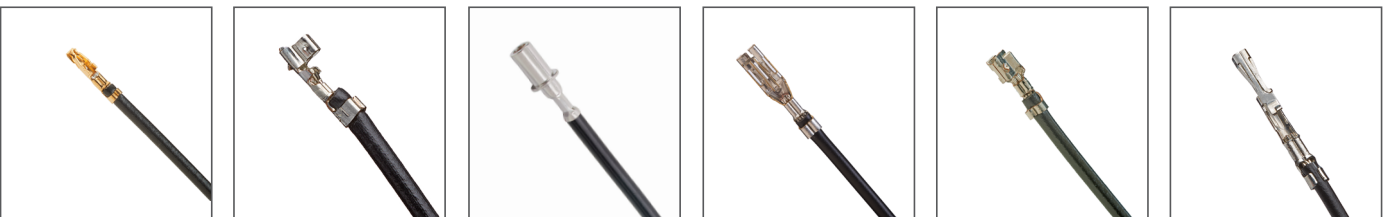

Pico-Lock Pico-SPOX PowerWize Sabre Sherlock SL



Solderless Ring Squba 1.80mm Squba 3.60mm Standard .062" Standard .093" Ultra-Fit

Pre-Crimped Leads



Ordering Information

Product Family	Series Number	Length (mm)	Connector A	Connector B	Wire Size (AWG)	Wire/Cable Type
C-Grid	79758	150, 300	Female	Female	22	UL 1061
CLIK-Mate	79758, 215710, 215711	75, 150, 225, 300, 450	Female, Male	Female, Male	24, 26, 28	UL 1061, UL 10002
DuraClik	79758	150, 300	Female	Female	26	UL 1061
iGrid	217490, 217491	75, 150, 225, 300, 450	Female	Female	22, 24, 26	UL 10002
KK	79758	150, 300	Female, Male	Female, Male	22, 24	UL 1061, UL 1007
L1NK 396	79758	150	Female	Female	18	UL 1051
Mega-Fit	79758	150, 300	Female	Female	16, 12	UL 1015
Micro-Clasp	79758	150, 300	Female	Female	24	UL 1007
Micro-Fit 3.0	79758, 214760, 214761, 214762, 214763	150, 300, 600	Female, Male	Female, Male, -	18, 20	UL 1061, UL10002
Micro-Lock Plus	79758	150, 300	Female	Female	26	UL 1061
Micro-Lock Plus 2.0	217500 217501	75, 150, 225, 300, 450	Female	Female, Strip	22, 24, 26	UL 10002
Micro-One ISL	219654	75, 150, 225, 300, 450	Female	Female	22	UL 1569
	219655			Strip	22, 24, 26	
Mini-Fit Sigma	219670 219671	75.00, 150.00, 225.00, 300.00, 450.00	Female	Female	16, 18, 20	UL 11028
Mini-Fit Sr.	217480, 217481, 217482, 217483	150, 225, 300, 450	Female, Male	Female, Male	8, 10, 12	UL 10669
Mini-Lock	79758	150, 300	Female	Female	22	UL 1061
Mini-Spox 2.5	219676 219677	75, 150, 225, 300, 450	Female	Female	22, 24, 26	UL 1569
Mizu-P25	217840, 217841, 217842, 217843, 217520, 217521, 217522, 217523	75, 150, 225, 300, 450,	Female, Male	Female, Male	20, 22	UL10002, FLRY-B

Ordering Information

Product Family	Series Number	Length (mm)	Connector A	Connector B	Wire Size (AWG)	Wire/Cable Type
MLX	79758	150, 300	Female, Male	Female, Male	18	UL 1015
Multicat	79758	150, 300	Female, Male	Female, Male	8, 9, 12, 16	UL 1199
MX150	216300, 216301, 216302, 216303	150, 225, 300, 450, 600	Female, Male	Female, Male	14, 16, 18	TXL
Nano-Fit	79758	150, 300	Female	Female	20	UL 1061
PicoBlade	79758, 214920, 214921, 214922, 214923	75, 150, 225, 300, 450	Female, Male	Female, Male	26, 28	UL1061
Pico-Clasp	79758	150, 300	Female	Female	28	UL 1571
Pico-EZmate	79758	300	Female	Female	28	UL 1516
Pico-Lock	79758	150, 300	Female	Female	24, 30	UL 1061, UL 1571
Pico-SPOX	79758	150, 300	Female	Female	24	UL 1061
PowerWize (6.00mm)	221960	600	Female	Female	2	UL 10198
			Female	Strip		
Sabre	79758	150, 300	Female, Male	Female, Male	16	UL 1015
Sherlock	79758	150, 300	Female	Female	26	UL 1061
SL	79758, 219680, 219681	75, 150, 225, 300, 450	Female	Female	22, 24, 26, 28	UL 1061, UL 11028
Squba 1.80mm	217790, 217791, 217792, 217793	75, 150, 225, 300, 450	Female	Female	22, 24	UL 10002
Squba 3.60mm	219676, 219677	75, 150, 225, 300, 450	Female	Female	22, 24, 26	UL 1569
Standard .062"	79758	150, 300	Female, Male	Female, Male	22	UL 1015
Standard .093"	79758	150, 300	Female, Male	Female, Male	18	UL 1015
Ultra-Fit	79758, 217470, 217471	75, 150, 225, 300, 450	Female	Female	16, 18, 20	UL 1061, UL 11028

Product Family	Series Number	Length (mm)	Stud Size	Wire Termination	Wire Size (AWG)	Wire/Cable Type
Solderless Ring Terminal	217851	150	10 (M5)	Blunt cut	16 AWG	UL 1015
		300				
		600				

www.molex.com/link/precrimped.html