



SEE DETAIL "A"

IMPEDANCE ( Z )			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	101 Ω	210 Ω	362 Ω
Minimum	- Ω	168 Ω	- Ω

Z vs. FREQUENCY  
(REF. ONLY)

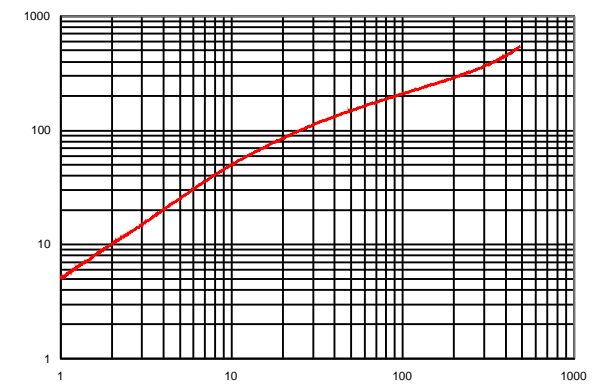

AGILENT E4991A Impedance/Material Analyzer  
HP 16092A-Test Fixture



DETAIL "A"  
CHAMFER  
SCALE=6:1

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	15.01 [.591]	+	0.38 [.015]
B	10.00 [.394]	+	0.25 [.010]
C	23.00 [.906]	+	0.50 [.020]
D	7.49 [.295]	+	0.25 [.010]
E	1.80 [.071]	+	0.25 [.010]

WEIGHT/1000 10.41 kgs 22.95 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

SCALE DRAWING 1:1

28R0593-000



DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		<b>Laird</b>	
PROJECT/PART NUMBER:				REV	PART TYPE:	DRAWN BY:	
28R0593-000				B	FERRITE RIBBON CORE	JUN	
B	UPDATE LOGO	08/29/16	QIU	DATE:	04/19/10	SCALE:	3 : 1
A	ORIGINAL DRAFT	04/19/10	JUN	CAD #	28R0593-000-B	TOOL #	R0593
REV	DESCRIPTION	DATE	INT			MATERIAL: Ferrite	