

	工	G	нт. П	т	D	0



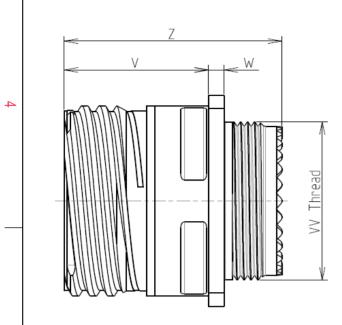

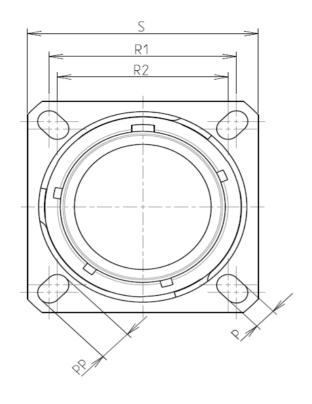

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass


-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

: 19.54 g ± 10%

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.39±0.2			
R1	24.61			
R2	23.01			
S	31±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M22x1-6g			

due to a use of the Products the Specifications issued by either (professional recomment Cour F PN: 8D01 18-10-2016 First Release А DATE Latest modification - by ISS Designed By: Date: TITLE Aluminiu

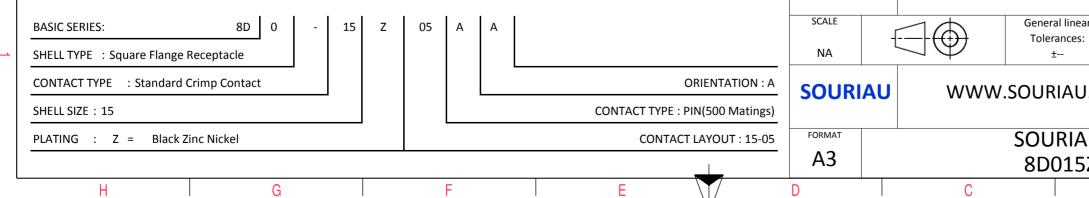

C □							
						4	
LAY	OUT SHOWN AS EXA	MPLE				3	
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed PN: 8D015Z05AA							
FIN. ODUISZUSAA							
rst Release Latest modification - by Date: CUSTOMER DRAWING							
Aluminium Receptacle 8D series							
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PR <b>859</b>			1	
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission							
	SOURIAU I 8D015Z0				SHEET 1/2		
С		B		A	-	J	

	т	G	н <b>г</b>	m		0	
		Contact Layout					Panel Cutou
4	د. 	$ \begin{array}{c}                                     $			7	SQUARE FLANGE RECEPTACLE REAR MOUNTING	(TYPE 0)
		X-axis         Y-axis           (mm)         (mm)           +.000 (0.00)         +.100 (2.54)           +.174 (4.42)         +.024 (0.61)           +.094 (2.39)        148 (3.76)          174 (4.42)         +.024 (0.61)			ž.		ØT
ى ن							Dim ØA ØAA R1 ØT
						due to a us the Specificatior	I not be liable for any e of the Products wh ns issued by either of sional recommendat
S							PN: 8D015Z
					A 18-10- ISS DA	2016 First Release	
					Designed By:	Date	:
					SCALE		Aluminium General linear
<u> </u>					NA		Tolerances:
					SOURI	AU WWW	V.SOURIAU.C
					FORMAT A3	I	SOURIAU 8D015Z0
	Н	G	F	E	D	C	

