
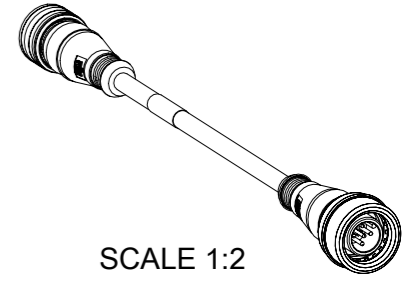
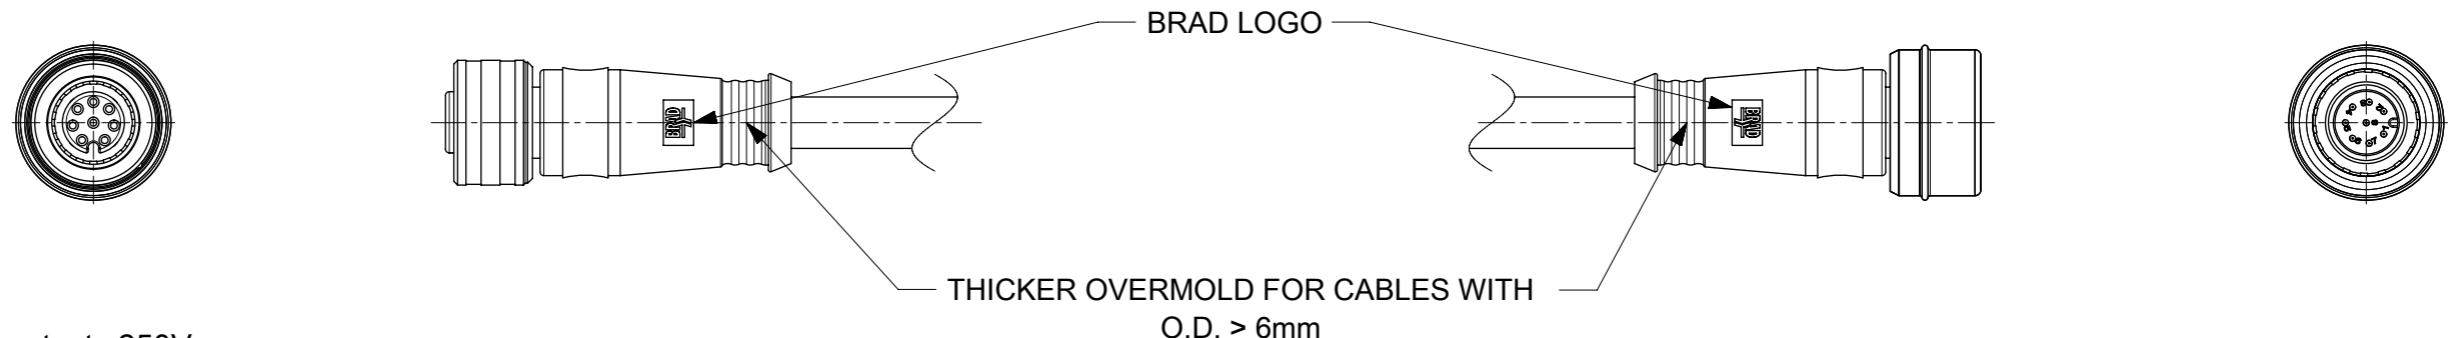


FEMALE PLUG M12U STRAIGHT TO MALE PLUG M12U STRAIGHT

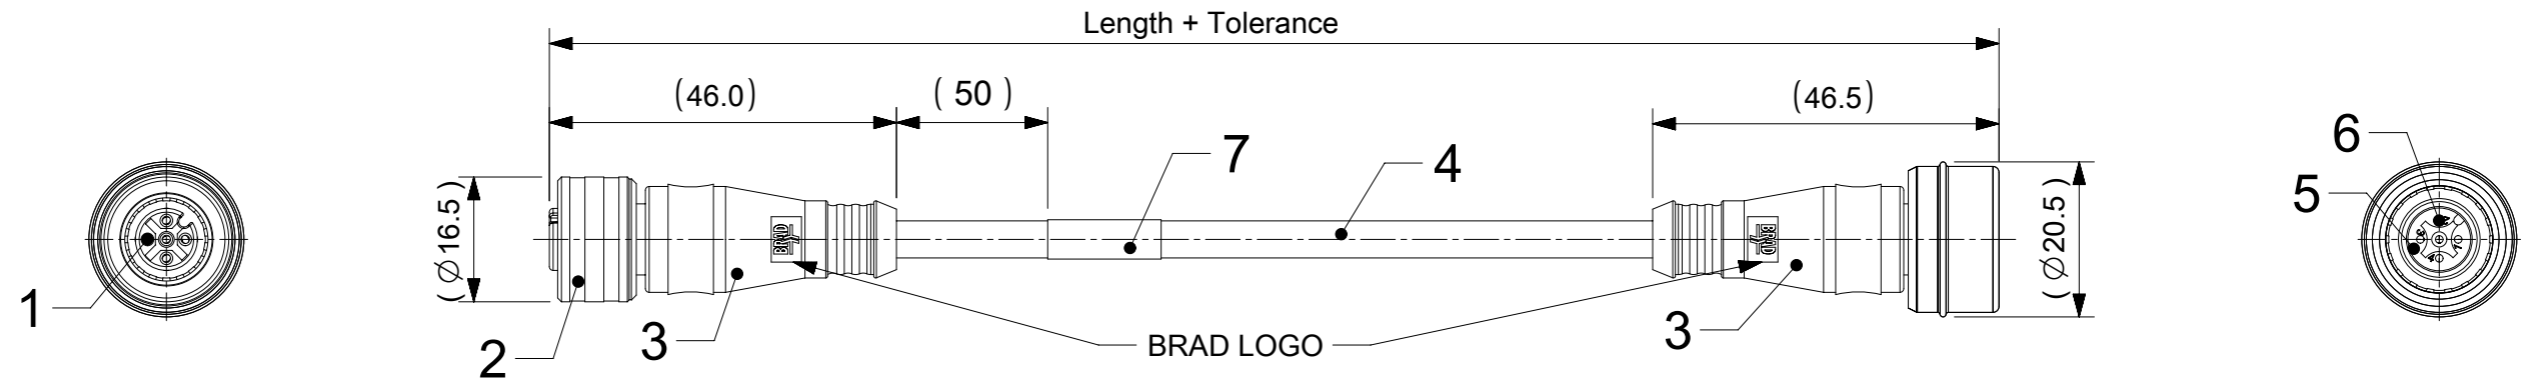

NOTES:

RATED VOLTAGE: 3, 4 contacts 250V
 5 contacts 60V
 8 contacts 30V

RATED CURRENT: 3, 4, 5 contacts 4A
 8 contacts 2A

PROTECTION CLASS: IP 67
 TEMPERATURE: -25°C / +80°C

CONTACTS POSITION FRONT VIEW:

| | 3 CONTACTS | | 4 CONTACTS | | 5 CONTACTS | | 8 CONTACTS | |
|-------------|------------|-------|------------|-------|------------|----------------------|------------|--------|
| FEMALE | | | | | | | | |
| MALE | | | | | | | | |
| CONNECTIONS | PIN | WIRE | PIN | WIRE | PIN | WIRE | PIN | WIRE |
| | 1 | BROWN | 1 | BROWN | 1 | BROWN | 1 | WHITE |
| | 2 | - | 2 | WHITE | 2 | WHITE | 2 | BROWN |
| | 3 | BLUE | 3 | BLUE | 3 | BLUE | 3 | GREEN |
| | 4 | BLACK | 4 | BLACK | 4 | BLACK | 4 | YELLOW |
| | | | | | 5 | GREY OR GREEN/YELLOW | 5 | GREY |
| | | | | | | | 6 | PINK |
| | | | | | | | 7 | BLUE |
| | | | | | | 8 | RED | |

CODING REQUIRED TO IEC 61076-2-101

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

| | | | | |
|------|---------------|--------------------|-------------|----------------------------|
| 7 | 1 | LABEL YELLOW | VINYL | - |
| 6 | 3 / 4 / 5 / 8 | CONTACT MALE | BRASS | SELECTIVE GOLD OVER NICKEL |
| 5 | 1 | PLUG U12 MALE XP | PUR, BRASS | - |
| 4 | - | CABLE | SEE SHEET 2 | - |
| 3 | - | OVERMOULDING BLACK | TPU | - |
| 2 | 1 | PLUG U12 FEMALE XP | PUR, BRASS | - |
| 1 | 3 / 4 / 5 / 8 | CONTACT FEMALE | BRASS | SELECTIVE GOLD OVER NICKEL |
| ITEM | QTY. | DESCRIPTION | MATERIAL | FINISH |

| | | | |
|--------------------|---|-------------------------------------|---|
| FUNCTIONAL SYMBOLS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | CURRENT REV DESC: MALE PLUG UPDATED | |
| ▲/ = 0 | DIMENSION UNITS: mm | SCALE: 1:1 | CSE U12 XP AC STR PUR/PVC MA XP STR XM DE PRODUCT CUSTOMER DRAWING |
| ▽/ = 0 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | |
| ▽/ = 0 | ANGULAR TOL ± 1.0° | | |
| DIVISIONAL SYMBOLS | 4 PLACES ± | 3 PLACES ± | |
| | 2 PLACES ± 0.05 | 2 PLACES ± 0.05 | EC NO: 695694 |
| | 1 PLACE ± 0.3 | 1 PLACE ± 0.3 | DRWN: MDHARMANTI 2022/01/21 |
| | 0 PLACES ± 0.5 | 0 PLACES ± 0.5 | CHK'D: RSILLER 2022/02/15 |
| | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | THIRD ANGLE PROJECTION | APPR: RSILLER 2022/02/15 |
| | | DRAWING: A3-SIZE | SERIES: 120080 |
| | | MATERIAL NUMBER: SEE MATRIX | CUSTOMER: GENERAL MARKET |
| | | DOCUMENT NUMBER: 1200805076 | DOC TYPE: PSD |
| | | DOC PART: 000 | REVISION: A |
| | | SHEET NUMBER: 1 OF 3 | |

ENGINEERING NO. - NUMERICAL CODE

OPTIONS

W W X 0 3 0 X X X M X X X X X

W = M12
Ultra-Lock

W = M12
Ultra-Lock

Contacts:
3=3 Contacts
4=4 Contacts
5=5 Contacts
8=8 Contacts

Heads style:
030=Plug Female Straight
to Plug Male Straight

Cable type: See Table

Units:
M=Meter

Length
Examples:
005=0.5m
010=1m
100=10m


Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow
H=2x ID CARRIER

CABLE INFORMATION

| CABLE TYPE | NO. OF WIRES | CROSS SECTION | CABLE JACKET | UL | CSA | STATIC: TEMP. / BENDING RADIUS | DYNAMIC: TEMP. / BENDING RADIUS | DRAG CHAIN | SHIELD |
|------------|---------------|---------------------|------------------|----------------|--------------------------|--------------------------------|---------------------------------|---|--------|
| E03 | 3 / 4 / 5 | 0.34mm ² | PVC BLACK | UL 2464/1729 | C22.2 I/II A/B 80°C/300V | -30°C to +80°C, 10xO.D. | -10°C to +80°C, 15xO.D. | - | - |
| H08 | 3 / 4 / 5 / 8 | 0.25mm ² | PUR BLACK LS0H | UL 21198/10493 | C22.2 I/II A/B 80°C/300V | -40°C to +80°C, 5xO.D. | -25°C to +80°C, 10xO.D. | 2 000 000 cycles at 20°C, Temp. range +5°C to +60°C | - |
| H09 | 3 / 4 / 5 | 0.34mm ² | PUR BLACK LS0H | UL 21198/10493 | C22.2 I/II A/B 80°C/300V | -40°C to +80°C, 5xO.D. | -25°C to +80°C, 10xO.D. | 2 000 000 cycles at 20°C, Temp. range +5°C to +60°C | - |
| P02 | 3 / 4 / 5 / 8 | 0.25mm ² | PUR / PVC BLACK | - | - | -30°C to +80°C, 7xO.D. | -5°C to +80°C, 15xO.D. | - | - |
| P03 | 3 / 4 / 5 | 0.34mm ² | PUR / PVC BLACK | - | - | -30°C to +80°C, 7xO.D. | -5°C to +80°C, 15xO.D. | - | - |
| P82 | 5 | 0.34mm ² | PUR / IRR ORANGE | - | - | -50°C to +105°C, 5xO.D. | -40°C to +105°C, 7.5xO.D. | - | - |

CABLE LENGTH TOLERANCES



| OVER [mm] | UP TO AND INCLUDING [mm] | TOLERANCES [mm] |
|-----------|--------------------------|------------------------|
| 0 | 305 | +19 |
| 305 | 915 | +45 |
| 915 | 1830 | +56 |
| 1830 | 3660 | +89 |
| 3660 | 7320 | +165 |
| 7320 | 14640 | +317 |
| 14640 | 30500 | +610 |
| 30500 | > | +2% of finished length |

| | | | | | | | | | |
|--|---|--------------------|---|-----------------|---------------|--|-------------------------|---------------------|-----------|
| FUNCTIONAL SYMBOLS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | CURRENT REV DESC: MALE PLUG UPDATED | | |  | | | |
| | △/A = 0 | mm | | | | | | | SCALE 1:1 |
| DIVISIONAL SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | | EC NO: 695694 DRWN: MDHARMANTI 2022/01/21 CHK'D: RSILLER 2022/02/15 APPR: RSILLER 2022/02/15 INITIAL REVISION: DRWN: MDHARMANTI 2022/01/21 APPR: RSILLER 2022/02/15 | | | PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER 1200805076 DOC TYPE PSD DOC PART 000 REVISION A | | | |
| | △/E = 0 | ANGULAR TOL ± 1.0° | | | | | | | |
| | △/V = 0 | 4 PLACES ± | | | | | | | |
| | | 3 PLACES ± | | | | | | | |
| | | 2 PLACES ± 0.05 | | | | | | | |
| | 1 PLACE ± 0.3 | | | | | | | | |
| | 0 PLACES ± 0.5 | | | | | | | | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | | THIRD ANGLE PROJECTION | DRAWING A3-SIZE | SERIES 120080 | MATERIAL NUMBER SEE MATRIX | CUSTOMER GENERAL MARKET | SHEET NUMBER 2 OF 3 | |


PART LIST

| NO. | MOLEX PN | ENGINEERING NO. | LENGTH |
|-----|------------|-----------------|--------|
| 1 | 1200808154 | WW5030P82M020 | 2M |
| 2 | 1200808155 | WW5030P82M030 | 3M |
| 3 | 1200808156 | WW5030P82M050 | 5M |
| 4 | 1200808157 | WW5030P82M070 | 7M |
| 5 | 1200808158 | WW5030P82M100 | 10M |
| 6 | 1200210002 | WW4030E03M050 | 5M |
| 7 | 1200800469 | WW4030E03M010 | 1M |
| 8 | 1200800470 | WW4030E03M020 | 2M |
| 9 | 1200805076 | WW5030E03M010 | 1M |
| 10 | 1200808016 | WW5030E03M050 | 5M |
| 11 | 1200805018 | WW4030P03M020 | 2M |
| 12 | 1200805022 | WW4030P03M005 | 0.5M |
| 13 | 1200805044 | WW4030P03M006 | 0.6M |
| 14 | 1200805049 | WW5030P03M006 | 0.6M |
| 15 | 1200805050 | WW5030P03M010 | 1M |
| 16 | 1200805051 | WW5030P03M020 | 2M |
| 17 | 1200808115 | WW4030P03M018 | 1.8M |
| 18 | 1200808133 | WW5030P03M100 | 10M |
| 19 | 1200805019 | WW5030P03M050 | 5M |
| 20 | 1200805048 | WW4030P03M050 | 5M |
| 21 | 1200805052 | WW5030P03M030 | 3M |
| 22 | 1200805053 | WW5030P03M040 | 4M |
| 23 | 1200808070 | WW5030P03M050A | 5M |
| 24 | 1200808071 | WW5030P03M020A | 2M |
| 25 | 1200805083 | WW8030P02M010 | 1M |
| 26 | 1200805096 | WW8030P02M020 | 2M |
| 27 | 1200808043 | WW5030P02M003G | 0.3M |
| 28 | 1200805097 | WW8030P02M050 | 5M |
| 29 | 1200808072 | WW8030P02M020A | 2M |
| 30 | 1200808073 | WW8030P02M050A | 5M |
| 31 | 1200808129 | WW8030P02M0208 | 2M |

| NO. | MOLEX PN | ENGINEERING NO. | LENGTH |
|-----|------------|-----------------|--------|
| 32 | 1200808026 | WW3030H09M010 | 1M |
| 33 | 1200808031 | WW4030H09M010 | 1M |
| 34 | 1200808039 | WW5030H09M010 | 1M |
| 35 | 1200808107 | WW5030H09M020 | 2M |
| 36 | 1200808033 | WW8030H08M010 | 1M |
| 37 | 1200808139 | WW8030H08M020 | 2M |
| 38 | 1200808140 | WW8030H08M050 | 5M |
| 39 | 1200798157 | WW5030E03M100 | 10M |
| 40 | 1200798158 | WW8030H08M100 | 10M |
| 41 | 1200210001 | WW4030E03M100 | 10M |
| 42 | 1200808015 | WW5030E03M020 | 2M |

| | | | | | | | | | |
|--------------------|---|--|---|---|---|--------------------------|------------------------------------|--|-----------------------------|
| FUNCTIONAL SYMBOLS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | CURRENT REV DESC: MALE PLUG UPDATED | |  | | | | |
| | $\nabla_A = 0$ $\nabla_B = 0$ $\nabla_C = 0$ | DIMENSION UNITS: mm SCALE: 1:1 | | | | | | GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL $\pm 1.0^\circ$ | |
| DIVISIONAL SYMBOLS | 4 PLACES | \pm | EC NO: 695694 | DRWN: MDHARMANTI | 2022/01/21 | PRODUCT CUSTOMER DRAWING | | | |
| | 3 PLACES | \pm | CHK'D: RSILLER | 2022/02/15 | 2022/02/15 | | | | |
| | 2 PLACES | ± 0.05 | APPR: RSILLER | 2022/02/15 | INITIAL REVISION: DRWN: MDHARMANTI 2022/01/21 APPR: RSILLER 2022/02/15 | | | | |
| | 1 PLACE | ± 0.3 | DOCUMENT NUMBER: 1200805076 DOC TYPE: PSD DOC PART: 000 REVISION: A | | | | | | |
| 0 PLACES | ± 0.5 | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | THIRD ANGLE PROJECTION  | DRAWING: A3-SIZE | SERIES: 120080 | MATERIAL NUMBER: SEE MATRIX | CUSTOMER: GENERAL MARKET | SHEET NUMBER: 3 OF 3 |

FEMALE PLUG M12U STRAIGHT TO MALE PLUG M12U STRAIGHT

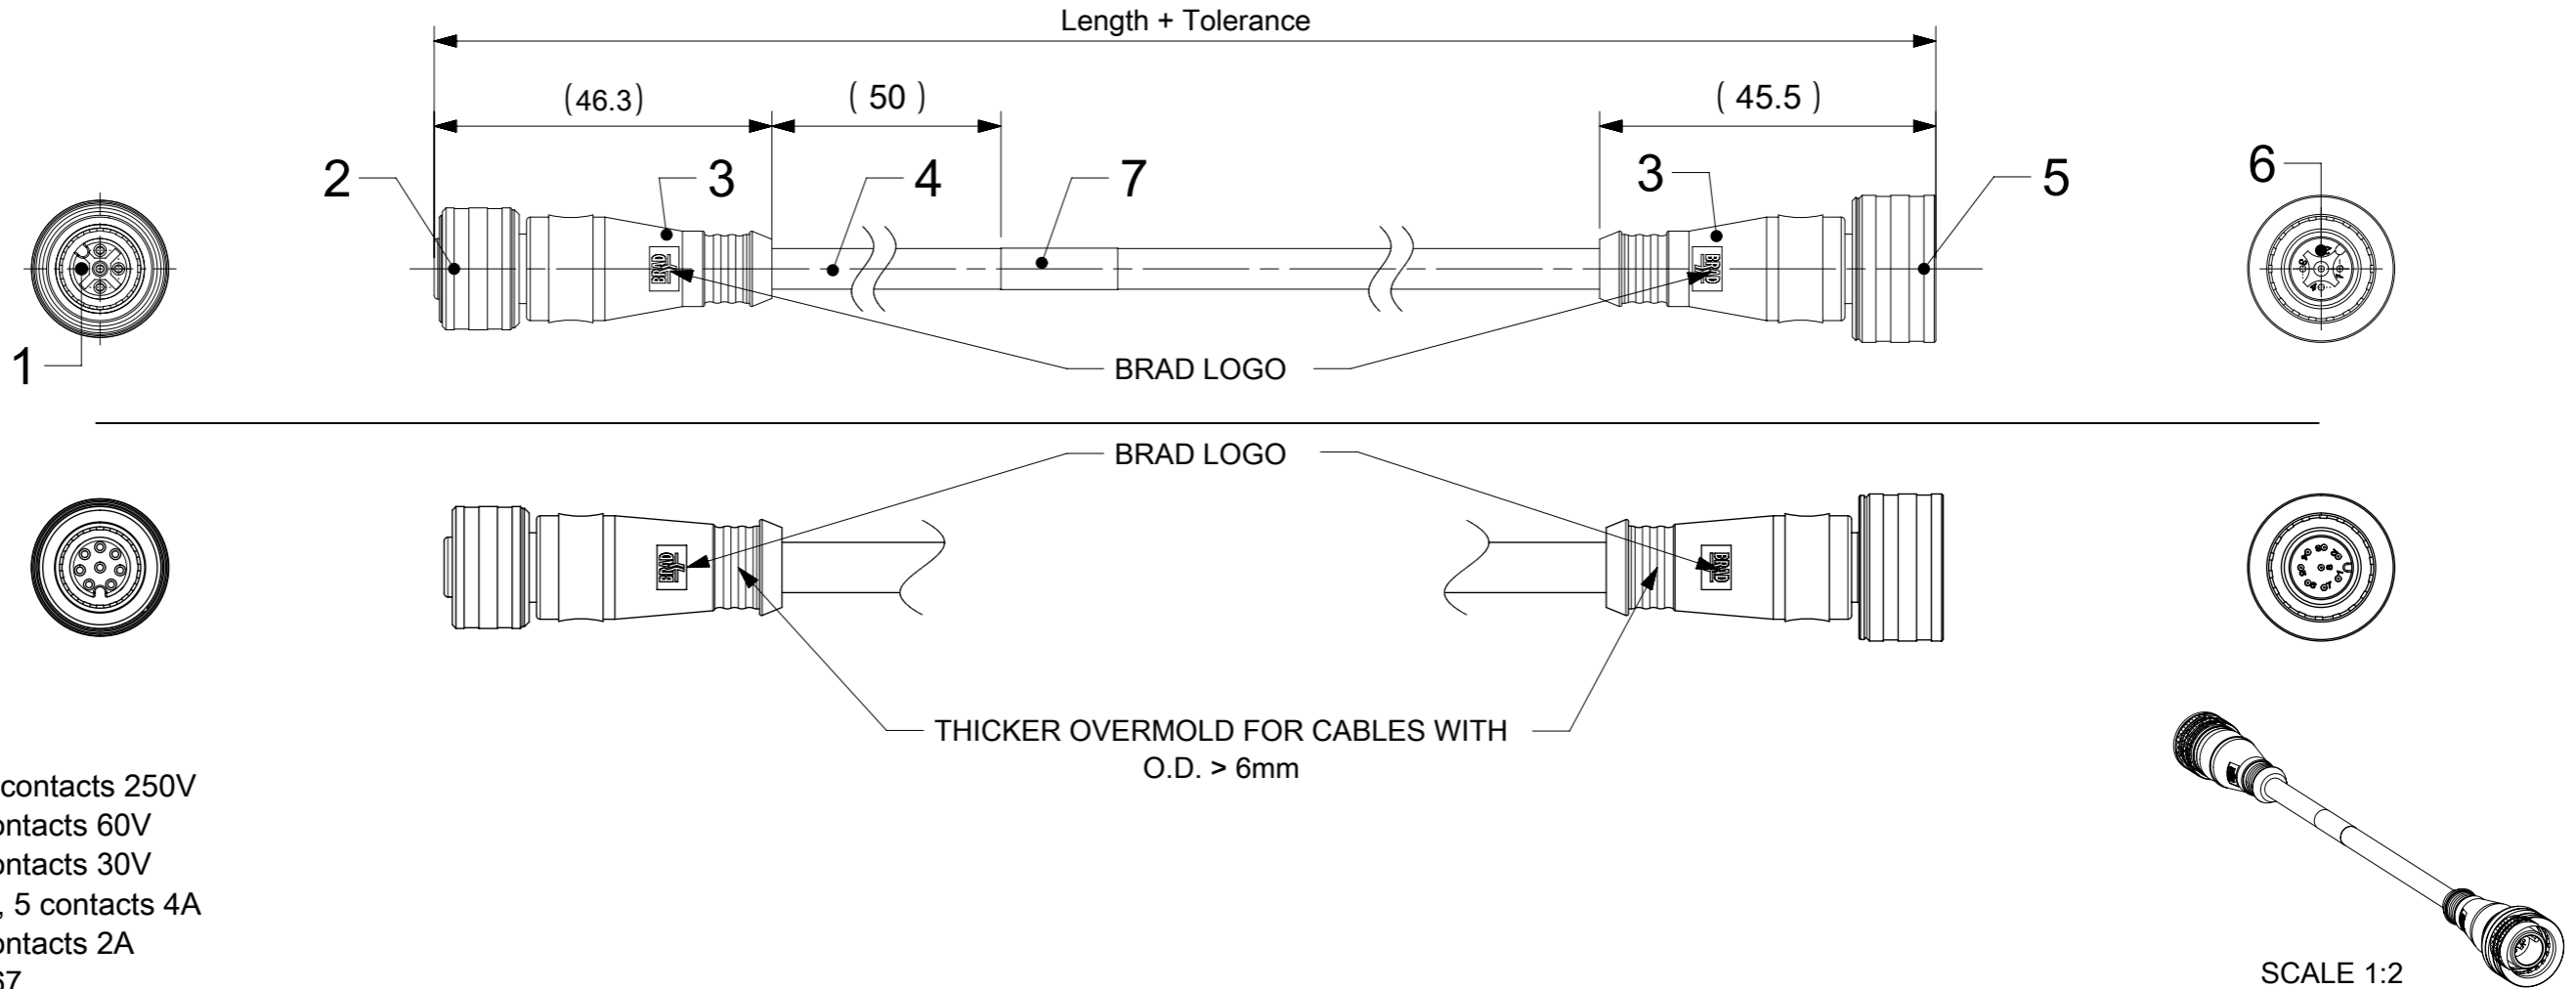

NOTES:

- RATED VOLTAGE: 3, 4 contacts 250V
5 contacts 60V
8 contacts 30V
- RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A
- PROTECTION CLASS: IP 67
- TEMPERATURE: -25°C / +80°C

CONTACTS POSITION FRONT VIEW:

| | 3 CONTACTS | | 4 CONTACTS | | 5 CONTACTS | | 8 CONTACTS | |
|-------------|------------|-------|------------|-------|------------|----------------------|------------|--------|
| FEMALE | | | | | | | | |
| | | | | | | | | |
| MALE | | | | | | | | |
| | | | | | | | | |
| CONNECTIONS | PIN | WIRE | PIN | WIRE | PIN | WIRE | PIN | WIRE |
| | 1 | BROWN | 1 | BROWN | 1 | BROWN | 1 | WHITE |
| | 2 | - | 2 | WHITE | 2 | WHITE | 2 | BROWN |
| | 3 | BLUE | 3 | BLUE | 3 | BLUE | 3 | GREEN |
| | 4 | BLACK | 4 | BLACK | 4 | BLACK | 4 | YELLOW |
| | | | | | 5 | GREY OR GREEN/YELLOW | 5 | GREY |
| | | | | | | | 6 | PINK |
| | | | | | | | 7 | BLUE |
| | | | | | | 8 | RED | |

CODING REQUIRED TO IEC 61076-2-101

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

| ITEM | QTY. | DESCRIPTION | MATERIAL | FINISH |
|------|---------------|--------------------|-------------|----------------------------|
| 7 | 1 | LABEL YELLOW | VINYL | - |
| 6 | 3 / 4 / 5 / 8 | CONTACT MALE | BRASS | SELECTIVE GOLD OVER NICKEL |
| 5 | 1 | PLUG U12 MALE XP | PUR, BRASS | - |
| 4 | - | CABLE | SEE SHEET 2 | - |
| 3 | - | OVERMOULDING BLACK | TPU | - |
| 2 | 1 | PLUG U12 FEMALE XP | PUR, BRASS | - |
| 1 | 3 / 4 / 5 / 8 | CONTACT FEMALE | BRASS | SELECTIVE GOLD OVER NICKEL |

| | | | | | |
|---|---|---|--|---|--|
| QUALITY SYMBOLS FA = 0 FE = 0 FF = 0 FV = 0 FC = 0 FX = 0 FS = 0 FT = 0 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | DIMENSION UNITS: mm SCALE: 1:1 | | |
| | GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0 ° | | DRWN BY: MKOWALCZYK01 DATE: 2017/05/18 | | |
| | 4 PLACES ± 3 PLACES ± 2 PLACES ± 0.05 1 PLACE ± 0.3 0 PLACES ± 0.5 | | CHK'D BY: MIWASIECZKO DATE: 2017/05/31 | | |
| | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | DRAWING SIZE: A3 THIRD ANGLE PROJECTION | | |
| EC NO: 178454 DRWN: SSM CHK'D: SSM REV APPR: RSILLER 2018/06/21 2018/06/27 2018/06/28 | | PRODUCT CUSTOMER DRAWING | | SERIES: 120080 MATERIAL NUMBER: SEE MATRIX CUSTOMER: GENERAL MARKET | |
| RELEASE STATUS: P1 RELEASE DATE: 2018/06/28 06:17:11 | | DOCUMENT NUMBER: 1200805076 DOC TYPE: PSD DOC PART: 00P SHEET NUMBER: 1 OF 3 | | | |

ENGINEERING NO. - NUMERICAL CODE

OPTIONS

W W X 0 3 0 X X X M X X X X X

W = M12
Ultra-Lock

W = M12
Ultra-Lock

Contacts:
3=3 Contacts
4=4 Contacts
5=5 Contacts
8=8 Contacts

Heads style:
030=Plug Female Straight
to Plug Male Straight

Cable type: See Table

Units:
M=Meter

Length
Examples:
005=0.5 unit
010=1 unit
100=10 units

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow

H=2x ID CARRIER

CABLE INFORMATION

| CABLE TYPE | NO. OF WIRES | CROSS SECTION | CABLE JACKET | UL | CSA | STATIC: TEMP. / BENDING RADIUS | DYNAMIC: TEMP. / BENDING RADIUS | DRAG CHAIN | SHIELD |
|------------|---------------|---------------------|------------------|----------------|--------------------------|--------------------------------|---------------------------------|---|--------|
| E03 | 3 / 4 / 5 | 0.34mm ² | PVC BLACK | UL 2464/1729 | C22.2 I/II A/B 80°C/300V | -30°C to +80°C, 10xO.D. | -10°C to +80°C, 15xO.D. | - | - |
| H08 | 3 / 4 / 5 / 8 | 0.25mm ² | PUR BLACK LS0H | UL 21198/10493 | C22.2 I/II A/B 80°C/300V | -40°C to +80°C, 5xO.D. | -25°C to +80°C, 10xO.D. | 2 000 000 cycles at 20°C, Temp. range +5°C to +60°C | - |
| H09 | 3 / 4 / 5 | 0.34mm ² | PUR BLACK LS0H | UL 21198/10493 | C22.2 I/II A/B 80°C/300V | -40°C to +80°C, 5xO.D. | -25°C to +80°C, 10xO.D. | 2 000 000 cycles at 20°C, Temp. range +5°C to +60°C | - |
| P02 | 3 / 4 / 5 / 8 | 0.25mm ² | PUR / PVC BLACK | - | - | -30°C to +80°C, 7xO.D. | -5°C to +80°C, 15xO.D. | - | - |
| P03 | 3 / 4 / 5 | 0.34mm ² | PUR / PVC BLACK | - | - | -30°C to +80°C, 7xO.D. | -5°C to +80°C, 15xO.D. | - | - |
| P82 | 5 | 0.34mm ² | PUR / IRR ORANGE | - | - | -50°C to +105°C, 5xO.D. | -40°C to +105°C, 7.5xO.D. | - | - |

CABLE LENGTH TOLERANCES

| OVER [mm] | UP TO AND INCLUDING [mm] | TOLERANCES [mm] |
|-----------|--------------------------|------------------------|
| 0 | 305 | +19 |
| 305 | 915 | +45 |
| 915 | 1830 | +56 |
| 1830 | 3660 | +89 |
| 3660 | 7320 | +165 |
| 7320 | 14640 | +317 |
| 14640 | 30500 | +610 |
| 30500 | > | +2% of finished length |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|----------------|--------------|----------|---|----------|--------|---------|-------|----------|-------|---|-----------------|-------|----|-----|---------|------|--------------|------------|----------|------|---------|------|-------------|------------|--------------|------------------------|----|--|---|--------|-----------------|----------|--------|------------|----------------|-----------------|----------|----------|--------------|------------|-----|-----|--------|
| <p>QUALITY SYMBOLS</p> <p>FA = 0</p> <p>FE = 0</p> <p>FP = 0</p> <p>FV = 0</p> <p>FC = 0</p> <p>FX = 0</p> <p>FS = 0</p> <p>FV = 0</p> | <p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p> <p>2018/06/21 2018/06/27 2018/06/28</p> <p>EC NO: 178454 DRWN: SSM CHK'D: SSM REV APPR: RSILLER</p> <p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p> <table border="1" style="width: 100%;"> <tr> <td>4 PLACES</td> <td>±</td> </tr> <tr> <td>3 PLACES</td> <td>±</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.05</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.3</td> </tr> <tr> <td>0 PLACES</td> <td>± 0.5</td> </tr> </table> <p>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</p> | 4 PLACES | ± | 3 PLACES | ± | 2 PLACES | ± 0.05 | 1 PLACE | ± 0.3 | 0 PLACES | ± 0.5 | <table border="1" style="width: 100%;"> <tr> <td>DIMENSION UNITS</td> <td>SCALE</td> </tr> <tr> <td>mm</td> <td>1:1</td> </tr> <tr> <td>DRWN BY</td> <td>DATE</td> </tr> <tr> <td>MKOWALCZYK01</td> <td>2017/05/18</td> </tr> <tr> <td>CHK'D BY</td> <td>DATE</td> </tr> <tr> <td>APPR BY</td> <td>DATE</td> </tr> <tr> <td>MIWASIECZKO</td> <td>2017/05/31</td> </tr> <tr> <td>DRAWING SIZE</td> <td>THIRD ANGLE PROJECTION</td> </tr> <tr> <td>A3</td> <td></td> </tr> </table> | DIMENSION UNITS | SCALE | mm | 1:1 | DRWN BY | DATE | MKOWALCZYK01 | 2017/05/18 | CHK'D BY | DATE | APPR BY | DATE | MIWASIECZKO | 2017/05/31 | DRAWING SIZE | THIRD ANGLE PROJECTION | A3 | | <p style="font-size: 2em; font-weight: bold;">molex®</p> <p style="font-size: 1.2em; font-weight: bold;">M12U-XP-FE-STR-XP-M-STR-XM</p> <p style="font-weight: bold;">PRODUCT CUSTOMER DRAWING</p> <table border="1" style="width: 100%; font-size: 0.8em;"> <tr> <td>SERIES</td> <td>MATERIAL NUMBER</td> <td>CUSTOMER</td> </tr> <tr> <td>120080</td> <td>SEE MATRIX</td> <td>GENERAL MARKET</td> </tr> <tr> <td>DOCUMENT NUMBER</td> <td>DOC TYPE</td> <td>DOC PART</td> <td>SHEET NUMBER</td> </tr> <tr> <td>1200805076</td> <td>PSD</td> <td>00P</td> <td>2 OF 3</td> </tr> </table> | SERIES | MATERIAL NUMBER | CUSTOMER | 120080 | SEE MATRIX | GENERAL MARKET | DOCUMENT NUMBER | DOC TYPE | DOC PART | SHEET NUMBER | 1200805076 | PSD | 00P | 2 OF 3 |
| 4 PLACES | ± | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 PLACES | ± | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 PLACES | ± 0.05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 PLACE | ± 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 PLACES | ± 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DIMENSION UNITS | SCALE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| mm | 1:1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DRWN BY | DATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MKOWALCZYK01 | 2017/05/18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CHK'D BY | DATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| APPR BY | DATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MIWASIECZKO | 2017/05/31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DRAWING SIZE | THIRD ANGLE PROJECTION | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SERIES | MATERIAL NUMBER | CUSTOMER | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 120080 | SEE MATRIX | GENERAL MARKET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DOCUMENT NUMBER | DOC TYPE | DOC PART | SHEET NUMBER | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1200805076 | PSD | 00P | 2 OF 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

PART LIST

| NO. | MOLEX PN | ENGINEERING NO. | LENGTH |
|-----|------------|-----------------|--------|
| 1 | 1200808154 | WW5030P82M020 | 2M |
| 2 | 1200808155 | WW5030P82M030 | 3M |
| 3 | 1200808156 | WW5030P82M050 | 5M |
| 4 | 1200808157 | WW5030P82M070 | 7M |
| 5 | 1200808158 | WW5030P82M100 | 10M |
| 6 | 1200210002 | WW4030E03M050 | 5M |
| 7 | 1200800469 | WW4030E03M010 | 1M |
| 8 | 1200800470 | WW4030E03M020 | 2M |
| 9 | 1200805076 | WW5030E03M010 | 1M |
| 10 | 1200808016 | WW5030E03M050 | 5M |
| 11 | 1200805018 | WW4030P03M020 | 2M |
| 12 | 1200805022 | WW4030P03M005 | 0.5M |
| 13 | 1200805044 | WW4030P03M006 | 0.6M |
| 14 | 1200805049 | WW5030P03M006 | 0.6M |
| 15 | 1200805050 | WW5030P03M010 | 1M |
| 16 | 1200805051 | WW5030P03M020 | 2M |
| 17 | 1200808115 | WW4030P03M018 | 1.8M |
| 18 | 1200808133 | WW5030P03M100 | 10M |
| 19 | 1200805019 | WW5030P03M050 | 5M |
| 20 | 1200805048 | WW4030P03M050 | 5M |
| 21 | 1200805052 | WW5030P03M030 | 3M |
| 22 | 1200805053 | WW5030P03M040 | 4M |
| 23 | 1200808070 | WW5030P03M050A | 5M |
| 24 | 1200808071 | WW5030P03M020A | 2M |
| 25 | 1200805083 | WW8030P02M010 | 1M |
| 26 | 1200805096 | WW8030P02M020 | 2M |
| 27 | 1200808043 | WW5030P02M003G | 0.3M |
| 28 | 1200805097 | WW8030P02M050 | 5M |
| 29 | 1200808072 | WW8030P02M020A | 2M |
| 30 | 1200808073 | WW8030P02M050A | 5M |
| 31 | 1200808129 | WW8030P02M0208 | 2M |

| NO. | MOLEX PN | ENGINEERING NO. | LENGTH |
|-----|------------|-----------------|--------|
| 32 | 1200808026 | WW3030H09M010 | 1M |
| 33 | 1200808031 | WW4030H09M010 | 1M |
| 34 | 1200808039 | WW5030H09M010 | 1M |
| 35 | 1200808107 | WW5030H09M020 | 2M |
| 36 | 1200808033 | WW8030H08M010 | 1M |
| 37 | 1200808139 | WW8030H08M020 | 2M |
| 38 | 1200808140 | WW8030H08M050 | 5M |
| 39 | 1200798157 | WW5030E03M100 | 10M |
| 40 | 1200798158 | WW8030H08M100 | 10M |
| 41 | 1200210001 | WW4030E03M100 | 10M |
| 42 | 1200808015 | WW5030E03M020 | 2M |

| | | | | | | | | | | | |
|--|---|--|--------------|-----------------|------------------------|---|-----------------|-----------------|----------------|----------|--------------|
| <p>QUALITY SYMBOLS</p> <p> = 0</p> <p> = 0</p> <p> = 0</p> <p> = 0</p> <p> = 0</p> <p> = 0</p> <p> = 0</p> <p> = 0</p> <p> = 0</p> <p> = 0</p> | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | | | | | | |
| | <p>2018/06/21</p> <p>2018/06/27</p> <p>2018/06/28</p> | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION UNITS | SCALE | <p>M12U-XP-FE-STR-XP-M-STR-XM</p> <p>PRODUCT CUSTOMER DRAWING</p> | | | | | |
| | | ANGULAR TOL ± 1.0 ° | | mm | 1:1 | | | | | | |
| | | 4 PLACES ± | DRWN BY | | DATE | | | | | | |
| | | 3 PLACES ± | MKOWALCZYK01 | | 2017/05/18 | | | | | | |
| | | 2 PLACES ± 0.05 | CHK'D BY | | DATE | | | | | | |
| | <p>EC NO: 178454</p> <p>DRWN: SSM</p> <p>CHK'D: SSM</p> <p>REV APPR: RSILLER</p> | 1 PLACE ± 0.3 | | APPR BY | | DATE | SERIES | MATERIAL NUMBER | CUSTOMER | | |
| | | 0 PLACES ± 0.5 | | MIWASIECZKO | | 2017/05/31 | 120080 | SEE MATRIX | GENERAL MARKET | | |
| | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | DRAWING SIZE | THIRD ANGLE PROJECTION | | DOCUMENT NUMBER | | DOC TYPE | DOC PART | SHEET NUMBER |
| | | A2 | | A4 | | | 1200805076 | | PSD | 00P | 3 OF 3 |
| | | | | | | | | | | | |

RELEASE STATUS P1 RELEASE DATE 2018/06/28 06:17:11