

## Electronic housing - HCS-T MAXI 1W 5AA 1 1 7035 - 2203144

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Handheld housing T-Maxi light gray, comprising two half shells, two front lenses, screws. Front 1.1 mm recessed, with window and keyboard slot Battery compartment cover and battery contacts, for 5 AA batteries

## Your advantages

- Item is from the HCS product range
- Suitable for handheld devices
- Ergonomic straight or staggered housing design
- ☑ Integration of LCD displays and membrane keypads
- Degree of protection: up to IP54
- ☑ Temperature range: -20 °C to +50 °C
- ☑ Shock-resistant ABS plastic
- Flammability rating UL 94-V0

## RoHS

## Key Commercial Data

Packing unit	1 pc
GTIN	4 055626 376967
GTIN	4055626376967

## Technical data

#### Item properties

Туре	HCS-T MAXI 1W 5AA 1 1 7035
Order No.	2203144
Housing type	Handheld housing
Туре	stepped
Battery compartment	5 x AA

## Measurements

Caption	Schematic representation – for additional information, see product range drawing in the Download Center
---------	---



# Electronic housing - HCS-T MAXI 1W 5AA 1 1 7035 - 2203144

## Technical data

## Measurements

Width [ w ]	116 mm
Height [ h ]	253 mm
Depth [ d ]	46 mm
Diagonal	4.6 in. (Window for display)
Dimensions	x 1.1 mm (Recessed area on front)
Front with faceplate	top, 1 x (79.9 mm x 23.9 mm)
	bottom, 1 x (65.9 mm x 21.9 mm)

## Material specifications

Color (RAL)	light gray (7035)
Flammability rating according to UL 94	V0
Housing material	ABS

#### Hammer test

Specification	IEC 60068-2-75:2014-09
Impact energy	0.7 J
Number of drop cycles	5

## Thermostability (ball thrust test)

Specification	IEC 60695-10-2:2014-02
Temperature	80 °C
Test duration	1 h
Force	20

## Test for assessing the risk of fire (glow wire)

Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s


## Packaging information

Pieces per package	1
Denomination packing units	Pcs.
Standards and regulations	
Flammability rating according to UL 94	V0

Drawings



## Electronic housing - HCS-T MAXI 1W 5AA 1 1 7035 - 2203144

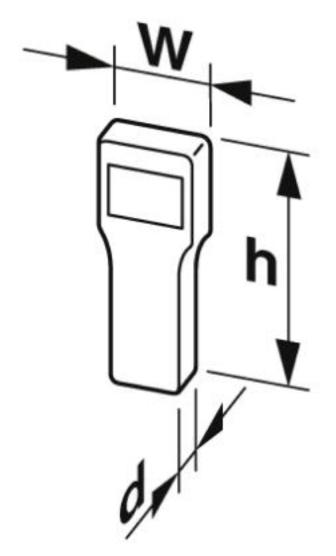

Dimensional drawing

Schematic representation - for additional information, see product range drawing in the Download Center

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200 http://www.phoenixcontact.com