

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Display housing, 7", light gray, central window, front level, consisting of two half shells, four front plates with screws

Your advantages

- ☑ Item belongs to the DCS product range
- ☑ Display housings for mobile and stationary operator panels
- Integration of TFT display and membrane keypads
- Degree of protection: up to IP54
- ✓ Temperature range: -20°C to +50°C
- Shock-resistant ABS plastic
- Flammability rating UL 94-V0

RoHS

Key Commercial Data

Packing unit	2 pc
GTIN	4 055626 378374
GTIN	4055626378374

Technical data

Item properties

Туре	DCS 7 M C O C 1 7035
Order No.	2203183
Housing type	Display housing
Battery compartment	no
Wall fastening	no
Ventilation openings present	no

Measurements

Width [w]	224 mm
Height [h]	157 mm




Technical data

Measurements

Depth [d]	40 mm	
Diagonal	7 in. (Window for display)	
Dimensions	154.4 mm x 93.4 mm (Window for display, center position)	
Front with faceplate	top, 2 x (62.8 mm x 21.8 mm)	
	left, 1 x (102.95 mm x 20 mm)	
	right, 1 x (102.95 mm x 20 mm)	
Material specifications		
Flammability rating according to UL 94	V0	
Housing material	ABS	
Packaging information		
Pieces per package	2	
Denomination packing units	Pcs.	
Standards and regulations		
Flammability rating according to UL 94	V0	

Drawings



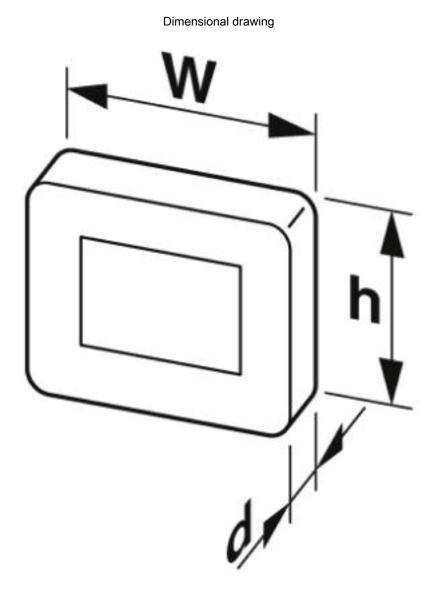

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

09/21/2019 Page 3 / 4



Approvals

EAC **ERI** B.01742

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200 http://www.phoenixcontact.com