





.XXX ±0.10


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER **ORIGINAL** 





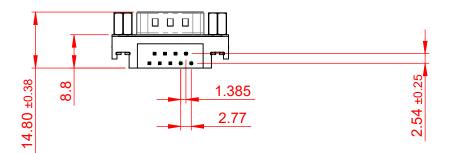

NOTES:

MATERIAL:

**HOUSING:** THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 15µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +125°C

**CURRENT RATING: 3A PER CONTACT** 

**CONTACT RESISTANCE:**  $25m\Omega$  MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

## 623 SERIES D-SUB CONNECTOR

EDAC INC

CANADA





THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 623 ASSEMBLY	
DRAWN: C.B	DATE: AUG. 01/2018
CHECKED:	DATE:
SCALE: 1:1	SHEET 1 OF 1
DRAWING NUMBER: 623-009-361-533	

623-009-361-533

PART NUMBER: