



.XX ±0.13 .XXX ±0.05 DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	1

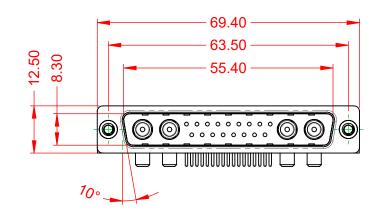




## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY			
		COMBINATION D-SUB		DRAWN:	C.B	DATE: JAN. 01/2	)19
			CHECKED		):	DATE:	
	EDAC INC TORONTO, ONTARIO CANADA VOLD CONNECTION TO OLIVITY & STEPLICE	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE:	(IN C.A.D. 1:1)	SHEET 1 OF	2	
			DRAWING	NUMBER: 629-21W	/4240-4T4	ISSUE	
Y			PART NUM	MBER: 629-21W	/4240-4T4	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

