845240014 ACTIVE

DEUTSCH

TE Internal #: 1-2600020-3


Automotive Terminals, Pin, Pin Diameter 1.56 mm [.061 in], 18 – 16 AWG Wire Size, .82 – 1.31 mm² Wire Size, Sealable, Family Seal,

Locking Clean Body

View on TE.com >



Terminals & Splices > Automotive Terminals

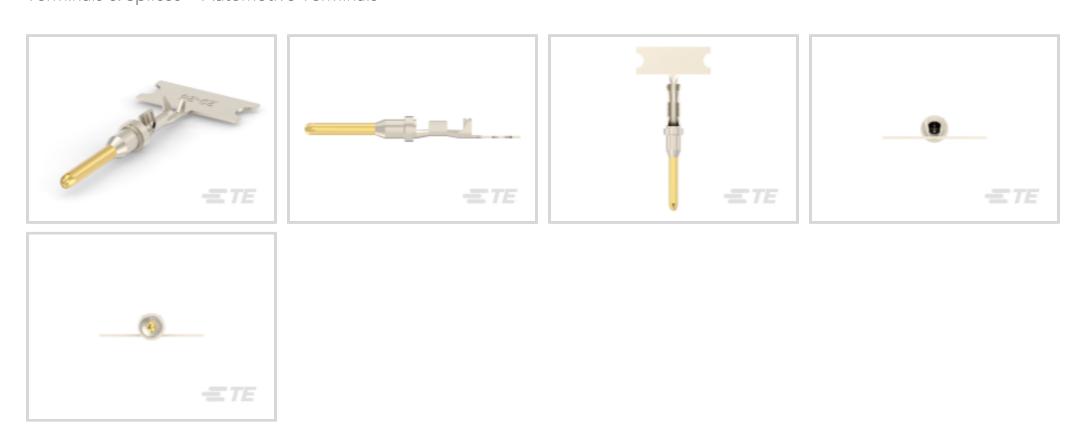

Terminal Type: Pin

Mating Pin Diameter: 1.56 mm [.061 in]
Terminal Transmits: 0 – 24 A (Low Power)

Wire Size: .82 – 1.31 mm²

Features

Product Type Features

Sealable	Yes
Primary Locking Feature	Clean Body
Body Features	
Terminal Seal Type	Family Seal
Contact Features	
Contact Size	Size 16
Contact Fabrication	Stamped & Formed
Typical Current Rating	10 A
Crimp Type	F-Crimp
Terminal Type	Pin
Mating Pin Diameter	1.56 mm[.061 in]
Interface Plating	Gold (Au)
Termination Features	
Termination Method to Wire & Cable	Crimp



Product Terminates To	Wire
Dimensions	
Wire Size	.82 – 1.31 mm ²
Wire Size Search	16 AWG, 17 AWG, 18 AWG
Tab Length	9.2 mm[.362 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[176 °F][185 °F][194 °F][212 °F] [221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Packaging Features	
Packaging Quantity	3000
Packaging Method	Reel
Other	

Product Compliance

Terminal Transmits

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

0 – 24 A (Low Power)

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

















Documents

Product Drawings

XRC PIN TERMINAL 16-18AWG Gold Plated

English

CAD Files

3D PDF

Automotive Terminals, Pin, Pin Diameter 1.56 mm [.061 in], 18 – 16 AWG Wire Size, . 82 – 1.31 mm² Wire Size, Sealable, Family Seal, Locking Clean Body



3D

Customer View Model

ENG_CVM_CVM_1-2600020-3_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2600020-3_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2600020-3_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English