


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS..27513	03/27/20	MK

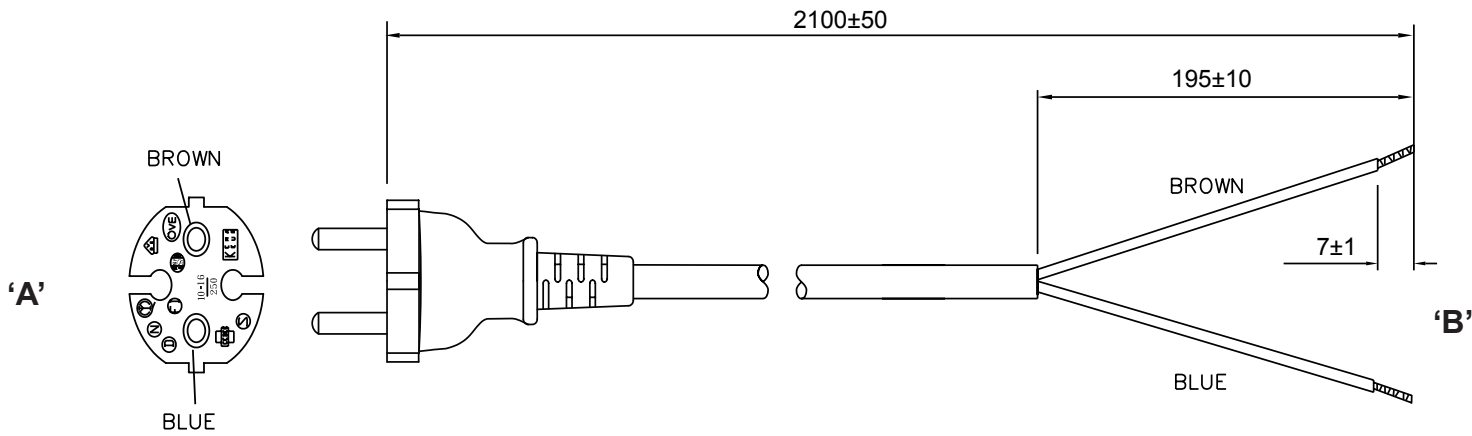


GENERAL SPECIFICATIONS:

RATING: 10A-16A / 250V AC
 CABLE TYPE / SIZE: HO5HN-F, 2 x 0.75 mm²
 TEMPERATURE RATING: 70°C
 CONDUCTOR COLORS: BLUE / BROWN
 OVERALL LENGTH (L): 2100 ± 50 mm
 CABLE OUTER DIAMETER: 7.0 ± 1.0 mm
 END 'A' PLUG: CEE 7/7 2 PRONGS
 END 'B': SEE TERMINATION TABLE
 APPROVALS PLUG: VDE, N, S, D, FI, KEMA, CEBEC, OVE
 APPROVALS CABLE: VDE, N, S, D, FI, KEMA, CEBEC, OVE

PACKING:

HANKED:

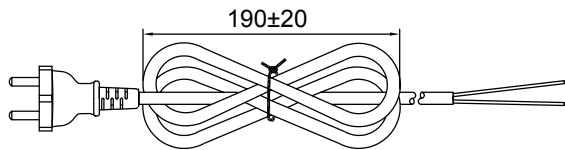

NOTES:

1. PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).


Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing. A delay in receipt of this form will delay delivery schedule.

Company Name:
 Customer P/N:
 Quote Number:
 Date:
 Auth. Rep. Name:
 Auth. Rep. Signature:

CONDUCTOR TERMINATION TABLE:

Wire	ROJ ± 1 mm	Terminal
Blue	7	Brass Ferrul
Brown	7	Brass Ferrul



RELEASED
 By pudxc at 2:37 pm, Jul 14, 2020

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: HM	DATE: 03/27/20	DWG TITLE:EUROPEAN CONTINENTAL NON-DETACHABLE CORDSET		
DRAWN: NF	DATE: 03/27/20	FSCN No.: G, CC,T	SIZE A	MODEL: N / A REV. A
APRVD:MK	DATE: 03/27/20	SCALE: NONE		PART NO: 489C4132M200 SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice