



.XX ±0.13 .XXX ±0.05

ORIO
1

ISSUE NUMBER GINAL (1)

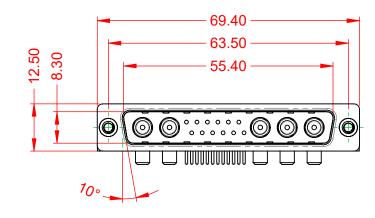




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING SIGNAL CONTACT RESISTANCE:	3: 5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE:	$5000M\Omega$ min.

DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-17W5240-4NC		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-17W	5240-4NC	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

