	I	Q	н <b>т</b>	m	0







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Without Plating				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65℃ to +175℃				

: 2000 hours

: 13.3 g ± 10%

8D 0

G

11

Х

04

В

F

Ν


Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 11-04

CONTACT TYPE : SOCKET(500 Matings)

Е



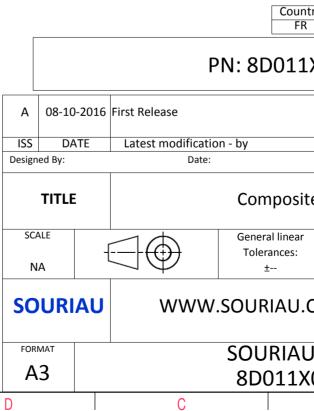

	σ			A			
						4	
AS EXA	AMPLE	5				3	
whic er of t	non-conformit ch does not co he Parties or b	mply wit	th d party				
idatio intry R	on, technical n Jurisd		Control Li	st	]	2	
1X04BN							
		CUSTO	OMER DRA	AWING	MOD N	•	
ite Receptacle 8D series							
ar	NPRDS / PROJECT 859						
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						1	
	DRG N° 4BN-C				SHEET		
	B			Α			

_	Ŧ	۵	п –	m	D	0	
		Contact Layout				1	Panel Cutou
4	-X	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numt size no. cont	X-axis (mm)         Y-axis (mm)           + 0.65 (1.65)         .065 (1.65)           + 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)			1 2 2		<u>.Ø</u> T
ω						Dim ØA ØAA R1 ØT	A
	-					SOURIAU shall not be li due to a use of the F the Specifications issued (professional rec	Products wh by either of
2							Countr FR
					A 08-10-20 ISS DATE	116 First Release	3D011)
					Designed By:	Date:	omposite
<b>→</b>					SCALE NA		eral linear lerances: ±
					FORMAT A3	SO	URIAU.C URIAU D011X(
L	Н	G	F	E	D	C C	

