
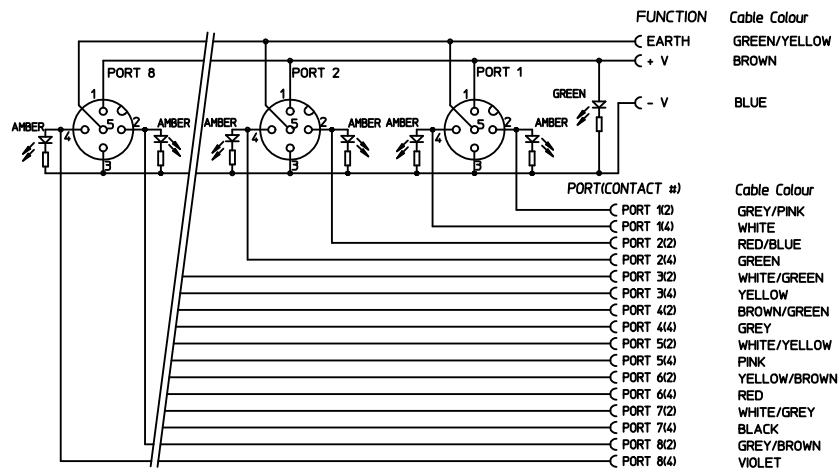


10 9 8 7 6 5 4 3 2 1

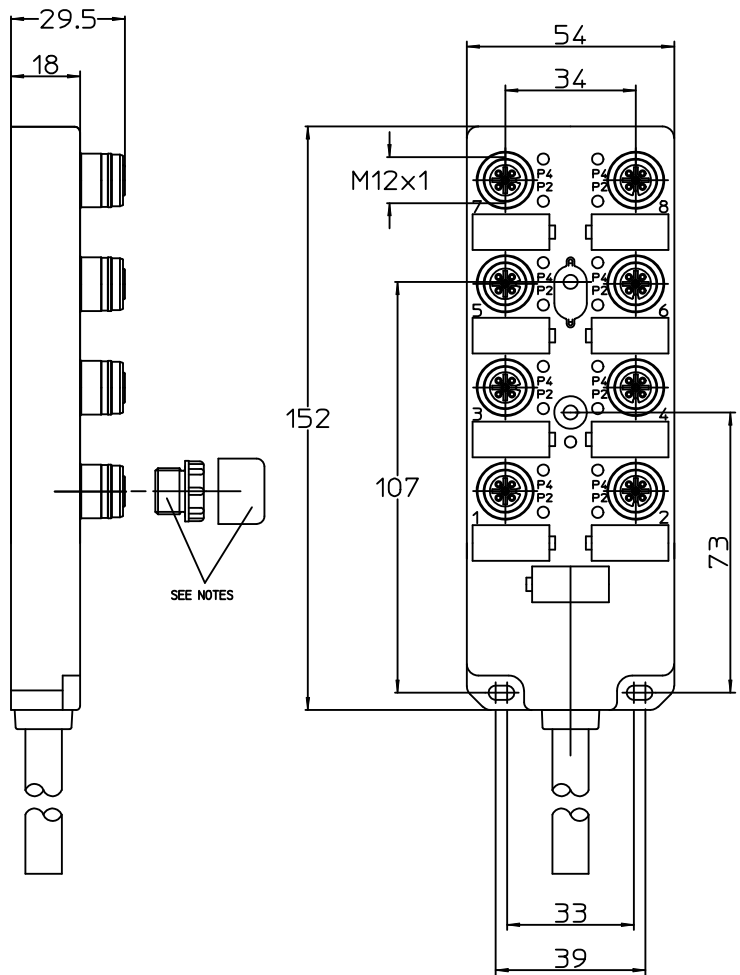

**SPECIFICATION**  
**MATERIALS:**  
 HOUSING & INSERT: PBT  
 COUPLING: BRASS-NICKEL PLATED  
 O-RING: VITON  
**ELECTRICAL:**  
 VOLTAGE: 10-30VDC  
 CURRENT RATING: 4A PER PORT, 12 AMPS MAX.  
 PROTECTION CLASS: IP68

**NOTES:**  
 THREADED PLUG FITTED TO PORTS 1 & 2 ONLY  
 PROTECTION CAP FITTED TO ALL M12 PORTS  
 FIXING HOLES TO SUIT M4 SCREWS

SAP-Nummer	alte Artikel-Nr.	Beschreibung	Farbe
SAP-NUMBER	OLD ENGINEERING-No.	DESCRIPTION	COLOR
1201190028	BKY805P-FBP-03	ULTRA-LOCK MPIS 8 WAY - 16 I/O -3M	gelb/YELLOW
1201190023	BKY805P-FBP-05	ULTRA-LOCK MPIS 8 WAY - 16 I/O -5M	gelb/YELLOW
1201195001	BKY805P-FBP-05A	ULTRA-LOCK MPIS 8 WAY - 16 I/O -5M	gelb/YELLOW
1201148005	BKY805P-FBP-10	ULTRA-LOCK MPIS 8 WAY - 16 I/O -10M	gelb/YELLOW
1201190039	BKY805P-FBP-15	ULTRA-LOCK MPIS 8 WAY - 16 I/O -15M	gelb/YELLOW
1201190040	BKY805P-FBP-20	ULTRA-LOCK MPIS 8 WAY - 16 I/O -20M	gelb/YELLOW

NEW RELEASE EC NO: WEU2010-0220 DRWN:SBH CHKD: APPR:FPACHER 2009/12/07 2009/12/17 2009/12/18	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▼=0 ◻=0	mm    INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.05 ± --- 1 PLACE ± 0.10 ± --- ANGULAR ± ---°	MM ONLY		METRIC	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY: SBH    DATE: 2009/12/10 CHECKED BY: APOHL_WEU    DATE: 2009/12/10 APPROVED BY: FPACHER    DATE: 2009/12/17	TITLE	ULTRA-LOCK MPIS 8 WAY - 16 I/O -XM -PUR	
			MATERIAL NO.	DOCUMENT NO.	MOLEX INCORPORATED SD-120119-023	

9 8 7 6 5 4 3 2 1