

Materials

Outer shell: C3604 brass, chrome-plating
 Front nut: C3604 brass, chrome-plating
 Insulator: PPS (Polyphenylene sulfide) UL94 V-0, beige
 Pin: C38500 brass, 0.2 µm gold-plating, solder cup style
 Washer p/n 56-00006: cold rolled steel, nickel-plating
 Nut p/n 56-00007: C3604 brass, nickel-plating

Electrical Requirements

Breakdown voltage: 0.85 kV rms (contact to contact), 0.65 kV rms (contact to shell)
 Dielectric strength: 1 min @ 500 Vac
 Insulation resistance: 10,000 MΩ @ 500 Vdc
 Contact resistance: 30 mΩ or less, 5000 cycles

Mechanical Requirements

Insertion force: 1.02 kgf average
 Withdrawal force: 0.82 kgf average
 Latch force: 18.4 kgf average
 Life cycle: 5000 minimum mating cycles at 300 cycles per hour
 Shock resistance: 100g, 6 ms
 Resistance to vibration: 10-2000 Hz, 15g

Environmental Requirements



IP50 rating

Assembly info

Wire gauge: 24 AWG max (Ø0.60 mm)



Mating info

Mates with PPL7 series plug (4 pin, 0° key)

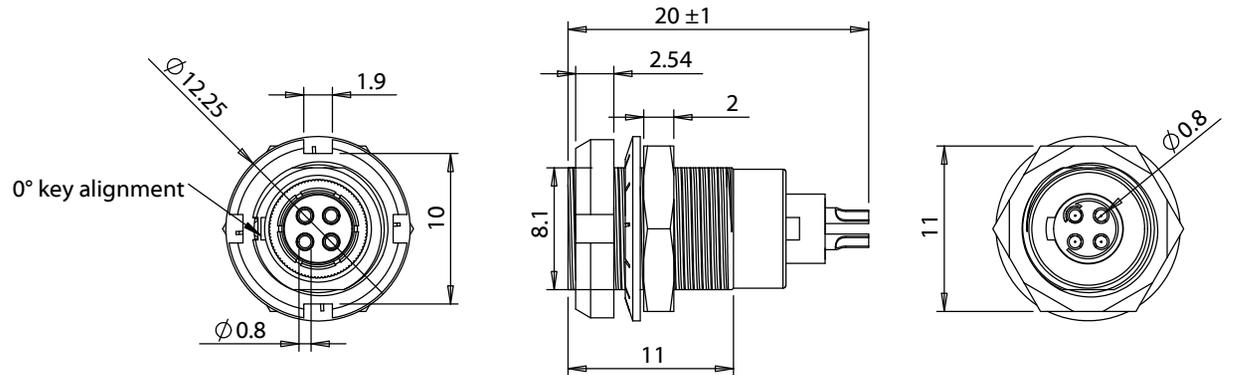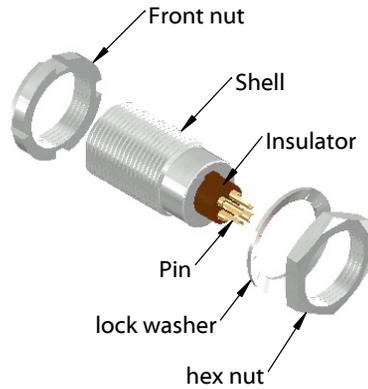

Installation Details

Panel thickness: 5.5 mm max
 Panel cutout Ø: 8.8 - 11.75 mm
 Connector layout:

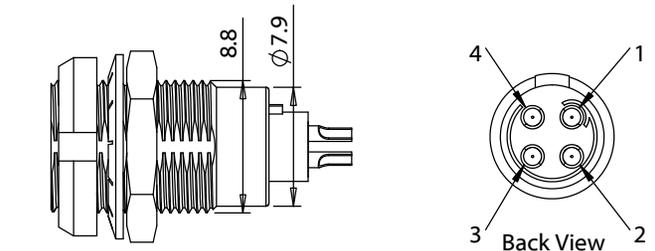

Revision:	Date:	Description:
A	12/13/2017	Initial Release

Prepared:
Verified:
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm

Notes: RoHS compliant
Function test: no open, no short circuit, no intermittent
Description: Connector, PPL7, 4C, 0° panel socket, front-back mount, 7x20 mm, chrome, solder

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com


Size:	Part number:
A	51-00018
Scale: 2:1	Sheet 1 of 2

Ratings

Voltage: 300 V
Current: 4 A

Operating Temperature Range

-55 to 220 °C

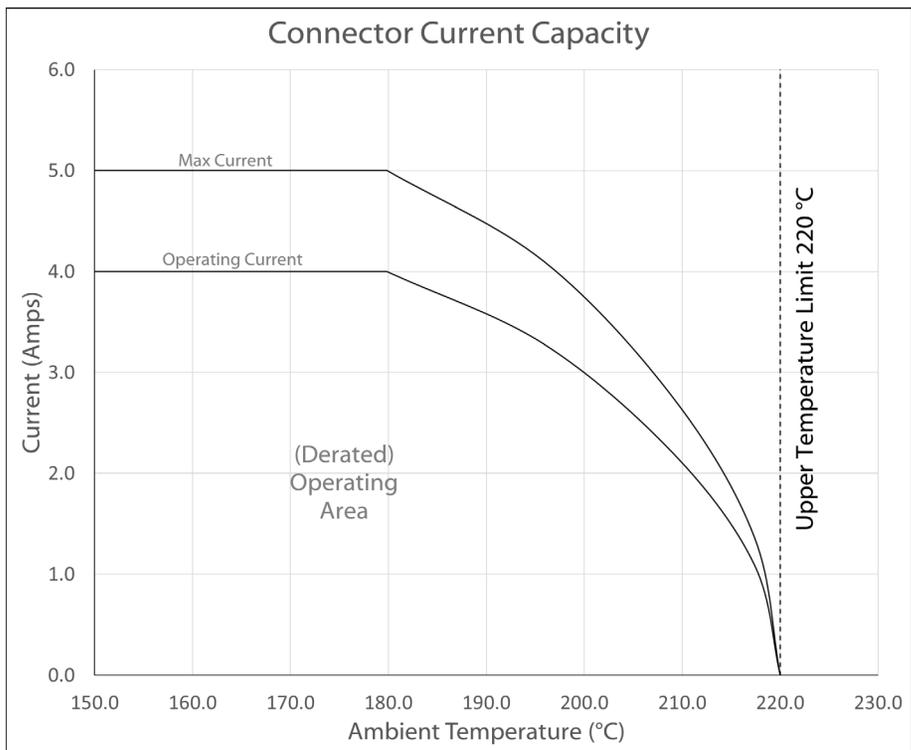

Testing based on IEC 60512-5-2. Max current curve generated with isolated test article under controlled environmental conditions, and does not take into account external factors such as housings or circuitry. Recommended operating current curve accounts for external factors, manufacturing variation, and error in temperature measurements.

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/13/2017	Initial Release	Verified:	RoHS compliant Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Connector, PPL7, 4C, 0° panel socket, front-back mount, 7x20 mm, chrome, solder	Size: Part number: A 51-00018
					Scale: 2:1 Sheet 2 of 2