


**Data sheet | Item number: 769-184/769-314**

1-conductor/1-pin terminal block for pluggable modules; 8-pole; with 2 jumper positions; with orange separator plate; for DIN-rail 35 x 15 and 35 x 7.5; 4 mm<sup>2</sup>; CAGE CLAMP®; 4,00 mm<sup>2</sup>; gray

[www.wago.com/769-184/769-314](http://www.wago.com/769-184/769-314)

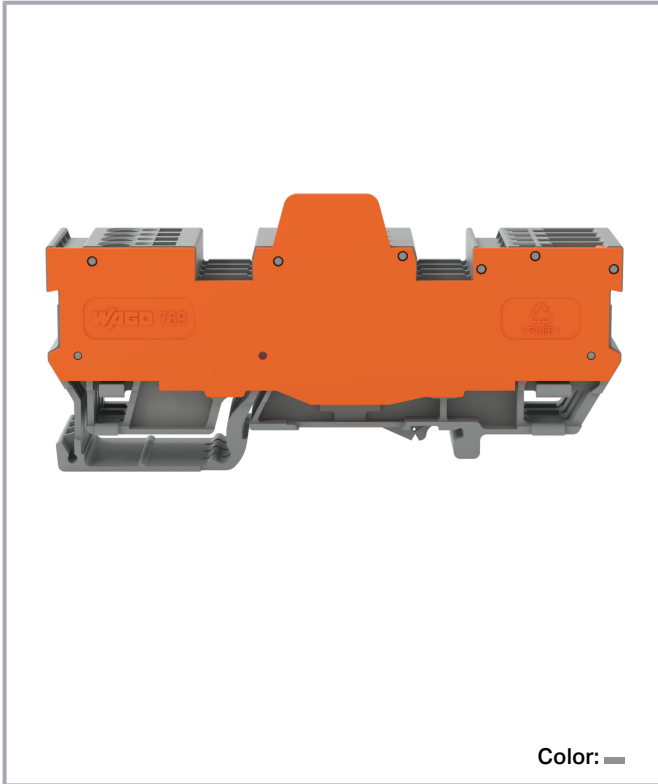

**Data**

**Notes**

Safety information

2-conductor female plugs cannot be used.

**Electrical data**

**Ratings per IEC/EN**

Nominal voltage (III/3)	400 V
Rated impulse voltage (III/3)	6 kV
Rated current	16 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Power loss

Power loss, per pole (potential)	0.256 W
Rated current $I_N$ for specified power loss	16 A
Resistance value for specified, current-dependent power loss	0.001 $\Omega$

## Connection data

Connection points	4
Total number of potentials	8
Number of levels	1

## Connection 1

Connection technology	CAGE CLAMP®
Number of connection points	4
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross-section	4 mm <sup>2</sup> / 12 AWG
Solid conductor	0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	8
Wiring direction	Front-entry wiring

## Connection 2

Number of connection points 2	4
-------------------------------	---

## Physical data

Width	21.1 mm / 0.831 inches
Height	87.5 mm / 3.445 inches
Depth from upper-edge of DIN-rail	28.5 mm / 1.122 inches

## Mechanical Data

Design	horizontal type
Mounting type	DIN-35 rail
Marking level	Center marking

Subject to changes. Please also observe the further product documentation!



## Material Data

Note (material data)

Information on material specifications can be found here

Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.74 MJ
Weight	35.5 g

## Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

## Commercial data


Product Group	18 (X-COM-System)
eCl@ss 10.0	27-14-11-20
eCl@ss 9.0	27-14-11-20
ETIM 8.0	EC000897
ETIM 7.0	EC000897
PU (SPU)	5 pcs
Packaging type	box
Country of origin	DE
GTIN	4044918934886
Customs tariff number	85366990990

## Environmental Product Compliance





RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Approvals / Certificates



### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	NTR NL- 7626



Subject to changes. Please also observe the further product documentation!

	CSA DEKRA Certification B.V.	C22.2 No. 158	1101144
	KEMA/KEUR DEKRA Certification B.V.	EN 60947	2190419.01
	UL Underwriters Laboratories Inc.	UL 1977	E 45171
	UR Underwriters Laboratories Inc.	UL 1059	E45172

## Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
	UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

## Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	ABS American Bureau of Shipping	EN 60947	20- HG1941090- PDA
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001V2



Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Required accessories

### End plate

End plate		
	<b>Item no.: 769-311</b> End and intermediate plate; 1.1 mm thick; gray	<a href="http://www.wago.com/769-311">www.wago.com/769-311</a>
	<b>Item no.: 769-312</b> End and intermediate plate; 1.1 mm thick; orange	<a href="http://www.wago.com/769-312">www.wago.com/769-312</a>

## Optional accessories


### Carrier rail

Mounting accessories		
	<b>Item no.: 210-197</b> Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored	<a href="http://www.wago.com/210-197">www.wago.com/210-197</a>
	<b>Item no.: 210-198</b> Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored	<a href="http://www.wago.com/210-198">www.wago.com/210-198</a>
	<b>Item no.: 210-504</b> Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored	<a href="http://www.wago.com/210-504">www.wago.com/210-504</a>
	<b>Item no.: 210-505</b> Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored	<a href="http://www.wago.com/210-505">www.wago.com/210-505</a>
	<b>Item no.: 210-506</b> Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored	<a href="http://www.wago.com/210-506">www.wago.com/210-506</a>
	<b>Item no.: 210-508</b> Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored	<a href="http://www.wago.com/210-508">www.wago.com/210-508</a>
	<b>Item no.: 210-113</b> Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored	<a href="http://www.wago.com/210-113">www.wago.com/210-113</a>
	<b>Item no.: 210-118</b> Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored	<a href="http://www.wago.com/210-118">www.wago.com/210-118</a>
	<b>Item no.: 210-112</b> Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored	<a href="http://www.wago.com/210-112">www.wago.com/210-112</a>
	<b>Item no.: 210-114</b> Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored	<a href="http://www.wago.com/210-114">www.wago.com/210-114</a>
<b>Item no.: 210-115</b>		

Subject to changes. Please also observe the further product documentation!



Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; [www.wago.com/210-115](http://www.wago.com/210-115)  
silver-colored



**Item no.: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored [www.wago.com/210-196](http://www.wago.com/210-196)

**Plugs**

Component module with LED



**Item no.: 286-822**  
Component module with LED; Red LED; with common cathode [www.wago.com/286-822](http://www.wago.com/286-822)

Solid-state relay module



**Item no.: 286-792**  
Optocoupler module; Red status indicator; gray [www.wago.com/286-792](http://www.wago.com/286-792)

AND gate module



**Item no.: 286-826**  
AND gate module with 6 inputs; light gray [www.wago.com/286-826](http://www.wago.com/286-826)

Relay module



**Item no.: 286-328/004-000**  
Relay module; Nominal input voltage: 24 VDC; 2 make contact; Limiting continuous current: 6 A; [www.wago.com/286-328/004-000](http://www.wago.com/286-328/004-000)  
Railway; Red status indicator; Module width: 20 mm; gray



**Item no.: 286-312**  
Relay module; Nominal input voltage: 24 VDC; 2 changeover contacts; Limiting continuous current: 7 A; [www.wago.com/286-312](http://www.wago.com/286-312)  
Red status indicator; Module width: 20 mm; gray



**Item no.: 286-328**  
Relay module; Nominal input voltage: 24 VDC; 2 make contact; Limiting continuous current: 6 A; Red [www.wago.com/286-328](http://www.wago.com/286-328)  
status indicator; Module width: 20 mm; gray



**Item no.: 286-312/004-000**  
Relay module; Nominal input voltage: 24 VDC; 2 changeover contacts; Limiting continuous current: 5 A; [www.wago.com/286-312/004-000](http://www.wago.com/286-312/004-000)  
Railway; Red status indicator; Module width: 20 mm; gray



**Item no.: 286-316**  
Relay module; Nominal input voltage: 220 VDC; 2 changeover contacts; Limiting continuous current: 7 [www.wago.com/286-316](http://www.wago.com/286-316)  
A; Red status indicator; Module width: 20 mm; gray



**Item no.: 286-320**  
Relay module; Nominal input voltage: 24 VDC; 1 break and 1 make contact; Limiting continuous current: [www.wago.com/286-320](http://www.wago.com/286-320)  
6 A; Red status indicator; Module width: 20 mm; gray



**Item no.: 286-336/001-000**  
Relay module; Nominal input voltage: 24 VDC; 2 break and 2 make contacts; Red status indicator; [www.wago.com/286-336/001-000](http://www.wago.com/286-336/001-000)  
Module width: 25 mm; gray



**Item no.: 286-352/004-000**  
Relay module; Nominal input voltage: 24 VDC; 4 make contacts; Limiting continuous current: 5 A; [www.wago.com/286-352/004-000](http://www.wago.com/286-352/004-000)  
Railway; Red status indicator; Module width: 25 mm; gray



**Item no.: 286-344/004-000**

Subject to changes. Please also observe the further product documentation!

Relay module; Nominal input voltage: 24 VDC; 3 break contacts and 1 make contact; Railway; Red status indicator; Module width: 25 mm; gray

[www.wago.com/286-344/004-000](http://www.wago.com/286-344/004-000)

**Item no.: 286-320/004-000**

Relay module; Nominal input voltage: 24 VDC; 1 break and 1 make contact; Railway; Red status indicator; Module width: 20 mm; gray

[www.wago.com/286-320/004-000](http://www.wago.com/286-320/004-000)

**Item no.: 286-516**

Relay module; Nominal input voltage: 230 VAC; 2 changeover contacts; Limiting continuous current: 7 A; Red status indicator; Module width: 15 mm; gray

[www.wago.com/286-516](http://www.wago.com/286-516)

Component module with diode

**Item no.: 286-807**

Component module with diode; with 7 pcs; Diode 1N4007; with common anode; gray

[www.wago.com/286-807](http://www.wago.com/286-807)

**Item no.: 286-809**

Component module with diode; with 9 pcs; Diode 1N4007; with common anode; gray

[www.wago.com/286-809](http://www.wago.com/286-809)

S0 interface power supply unit

**Item no.: 286-742**

S0 interface power supply; Input voltage: 230 VAC; S0 interface

[www.wago.com/286-742](http://www.wago.com/286-742)

Timer relay module

**Item no.: 286-604/004-000**

Timer relay module; Nominal input voltage: 24 VDC; Limiting continuous current: 6 A; On-delay: 10 ... 100 s; Red status indicator; Module width: 20 mm; gray

[www.wago.com/286-604/004-000](http://www.wago.com/286-604/004-000)

**Item no.: 286-640/004-000**

Timer relay module; Nominal input voltage: 24 VDC; Limiting continuous current: 5 A; Railway; Multifunction; Red status indicator; Module width: 20 mm; gray

[www.wago.com/286-640/004-000](http://www.wago.com/286-640/004-000)

**Item no.: 286-640**

Timer relay module; Nominal input voltage: 24 VDC; Limiting continuous current: 6 A; Railway; Multifunction/Multitime; Yellow status indicator; Module width: 6 mm; gray

[www.wago.com/286-640](http://www.wago.com/286-640)

Empty component plug housing

**Item no.: 286-112**

Empty component plug housing; Type 11; 20 mm wide; 8-pole; gray

[www.wago.com/286-112](http://www.wago.com/286-112)

**Item no.: 286-113**

Empty component plug housing; Type 12; 25 mm wide; 10-pole; gray

[www.wago.com/286-113](http://www.wago.com/286-113)

**Item no.: 786-102**

Empty component plug housing; Type 15; 20 mm wide; 8-pole; gray

[www.wago.com/786-102](http://www.wago.com/786-102)

**Item no.: 786-103**

Empty component plug housing; Type 16; 25 mm wide; 10-pole; gray

[www.wago.com/786-103](http://www.wago.com/786-103)

Current flow monitoring module

**Item no.: 286-664**

Current flow monitoring module; AC currents; Monitoring range: 0.2 A – 3 A; 1 changeover contact; light gray

[www.wago.com/286-664](http://www.wago.com/286-664)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27














32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.


	<b>Item no.: 286-665</b> Current flow monitoring module; AC currents; Monitoring range: 1 A – 10 A; 1 changeover contact; light gray	<a href="http://www.wago.com/286-665">www.wago.com/286-665</a>
	<b>Item no.: 286-661</b> Current flow monitoring module; AC currents; light gray	<a href="http://www.wago.com/286-661">www.wago.com/286-661</a>
<b>Cover</b>		
Cover		
	<b>Item no.: 769-438</b> Pin cover; with marker slot for miniature WSB; gray	<a href="http://www.wago.com/769-438">www.wago.com/769-438</a>
	<b>Item no.: 769-439</b> Pin cover; with marker slot for miniature WSB; orange	<a href="http://www.wago.com/769-439">www.wago.com/769-439</a>
<b>Mounting</b>		
Mounting accessories		
	<b>Item no.: 209-106</b> Mounting carrier; for isolated mounting on DIN 35 rails; gray	<a href="http://www.wago.com/209-106">www.wago.com/209-106</a>
	<b>Item no.: 249-116</b> Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray	<a href="http://www.wago.com/249-116">www.wago.com/249-116</a>
<b>Tool</b>		
Operating tool		
	<b>Item no.: 210-720</b> Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured	<a href="http://www.wago.com/210-720">www.wago.com/210-720</a>
<b>Ferrule</b>		
Ferrule		
	<b>Item no.: 216-101</b> Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated; silver-colored	<a href="http://www.wago.com/216-101">www.wago.com/216-101</a>
	<b>Item no.: 216-104</b> Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated; silver-colored	<a href="http://www.wago.com/216-104">www.wago.com/216-104</a>
	<b>Item no.: 216-102</b> Ferrule; Sleeve for 0.75 mm <sup>2</sup> / AWG 20; uninsulated; electro-tin plated; silver-colored	<a href="http://www.wago.com/216-102">www.wago.com/216-102</a>
	<b>Item no.: 216-103</b> Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated	<a href="http://www.wago.com/216-103">www.wago.com/216-103</a>
	<b>Item no.: 216-203</b> Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; red	<a href="http://www.wago.com/216-203">www.wago.com/216-203</a>
	<b>Item no.: 216-206</b>	

Subject to changes. Please also observe the further product documentation!




Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; blue


[www.wago.com/216-206](http://www.wago.com/216-206)

 **Item no.: 216-202**  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray


[www.wago.com/216-202](http://www.wago.com/216-202)

 **Item no.: 216-204**  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; black


[www.wago.com/216-204](http://www.wago.com/216-204)

 **Item no.: 216-201**  
Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; white

[www.wago.com/216-201](http://www.wago.com/216-201)

 **Item no.: 216-301**  
Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow


[www.wago.com/216-301](http://www.wago.com/216-301)

 **Item no.: 216-302**  
Ferrule; Sleeve for 0.34 mm<sup>2</sup> / 22 AWG; insulated; electro-tin plated; light turquoise

[www.wago.com/216-302](http://www.wago.com/216-302)

### Coding


#### Coding

 **Item no.: 769-435**  
Coding pin; for coding of female plugs; for carrier terminal blocks / male connectors; orange


[www.wago.com/769-435](http://www.wago.com/769-435)

### Push-in type wire jumper


#### Jumper

 **Item no.: 249-123**  
Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 180 mm long; black


[www.wago.com/249-123](http://www.wago.com/249-123)

 **Item no.: 249-126**  
Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 110 mm long; black

[www.wago.com/249-126](http://www.wago.com/249-126)

 **Item no.: 249-127**  
Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 250 mm long; black


[www.wago.com/249-127](http://www.wago.com/249-127)

 **Item no.: 249-125**  
Push-in type wire jumper; insulated; 60 mm long; black


[www.wago.com/249-125](http://www.wago.com/249-125)

### Jumpers


#### Jumper

 **Item no.: 280-402**  
Jumper; insulated; gray


[www.wago.com/280-402](http://www.wago.com/280-402)

 **Item no.: 280-409**  
Jumper; insulated; gray


[www.wago.com/280-409](http://www.wago.com/280-409)

 **Item no.: 780-454**  
Staggered jumper; from 1 to 4; insulated; gray

[www.wago.com/780-454](http://www.wago.com/780-454)














 **Item no.: 780-452**  
Staggered jumper; from 1 to 2; insulated; gray

[www.wago.com/780-452](http://www.wago.com/780-452)

 **Item no.: 780-453**  
Staggered jumper; from 1 to 3; insulated; gray

[www.wago.com/780-453](http://www.wago.com/780-453)

Subject to changes. Please also observe the further product documentation!

	<p><b>Item no.: 780-457</b> Staggered jumper; from 1 to 7; insulated; gray</p>	<a href="http://www.wago.com/780-457">www.wago.com/780-457</a>
	<p><b>Item no.: 780-456</b> Staggered jumper; from 1 to 6; insulated; gray</p>	<a href="http://www.wago.com/780-456">www.wago.com/780-456</a>
	<p><b>Item no.: 780-455</b> Staggered jumper; from 1 to 5; insulated; gray</p>	<a href="http://www.wago.com/780-455">www.wago.com/780-455</a>
	<p><b>Item no.: 780-458</b> Staggered jumper; from 1 to 8; insulated; gray</p>	<a href="http://www.wago.com/780-458">www.wago.com/780-458</a>
<b>Protective warning marker</b>		
Cover		
	<p><b>Item no.: 280-415</b> Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow</p>	<a href="http://www.wago.com/280-415">www.wago.com/280-415</a>
<b>Insulation stop</b>		
Insulation stop		
	<p><b>Item no.: 769-470</b> Insulation stop; 0.08 - 0.2 mm<sup>2</sup> "s" (0.14 mm<sup>2</sup> "f-st"); 5 pieces/strip; white</p>	<a href="http://www.wago.com/769-470">www.wago.com/769-470</a>
	<p><b>Item no.: 769-471</b> Insulation stop; 0.25 - 0.5 mm<sup>2</sup>; 5 pieces/strip; light gray</p>	<a href="http://www.wago.com/769-471">www.wago.com/769-471</a>
	<p><b>Item no.: 769-472</b> Insulation stop; 0.75 - 1 mm<sup>2</sup>; 5 pieces/strip; dark gray</p>	<a href="http://www.wago.com/769-472">www.wago.com/769-472</a>
<b>End plate</b>		
End plate		
	<p><b>Item no.: 769-314</b> Separator plate; 1.1 mm thick; oversized; orange</p>	<a href="http://www.wago.com/769-314">www.wago.com/769-314</a>
<b>Testing and measuring</b>		
Testing accessories		
	<p><b>Item no.: 210-136</b> Test plug; 2 mm Ø; with 500 mm cable; red</p>	<a href="http://www.wago.com/210-136">www.wago.com/210-136</a>
	<p><b>Item no.: 280-418</b> Test plug module; modular; suitable for all WAGO 280 and 780 Series rail-mounted terminal blocks with jumper slots in the current bar; gray</p>	<a href="http://www.wago.com/280-418">www.wago.com/280-418</a>
	<p><b>Item no.: 280-404</b> Test plug adapter; 5 mm wide; for test plug (2.3 mm Ø); suitable for 1.5 mm<sup>2</sup> - 4 mm<sup>2</sup> tbs; gray</p>	<a href="http://www.wago.com/280-404">www.wago.com/280-404</a>
	<p><b>Item no.: 280-419</b> Spacer module; modular; bridging commoned terminal blocks; gray</p>	<a href="http://www.wago.com/280-419">www.wago.com/280-419</a>

**Marking accessories**

Subject to changes. Please also observe the further product documentation!

Marker



Item no.: 2009-145

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)



Item no.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)

**Downloads**

**Documentation**

**Bid Text**

769-184/769-314 X81 - Datei	2019 Feb 19	xml 3.4 kB	Download
769-184/769-314 doc - Datei	2017 Oct 4	doc 26.1 kB	Download

**Additional Information**

Technical Section Technical explanations		pdf 2.2 MB	Download
---	--	---------------	----------

**CAD/CAE-Data**

**CAE data**

EPLAN Data Portal 769-184/769-314		URL	Download
WSCAD Universe 769-184/769-314		URL	Download
ZUKEN Portal 769-184/769-314		URL	Download
WSCAD Universe 769-184/769-314		URL	Download
EPLAN Data Portal 769-184/769-314		URL	Download

**CAD data**

2D/3D Models 769-184/769-314		URL	Download
------------------------------	--	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 769-184/769-314


URL

Download


1-conductor/1-pin terminal block for pluggable modules; 8-pole; with 2 jumper positions; with orange separator plate; for DIN-rail 35 x 15 and 35 x 7.5; 4 mm<sup>2</sup>; CAGE CLAMP<sup>®</sup>; 4,00 mm<sup>2</sup>; gray

## Installation Notes

### Installation

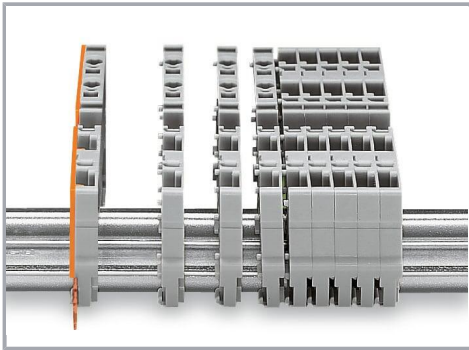


Snap individual carrier terminal blocks onto the DIN-rail and slide together.

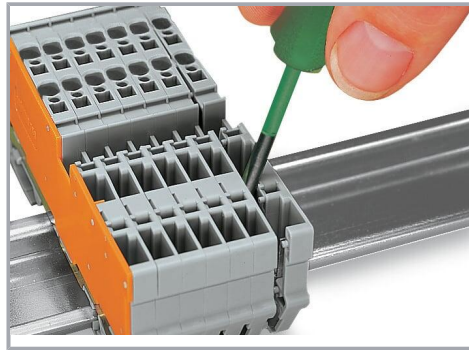

Open the assembly by laterally sliding a block via operating tool and remove terminal block via release lever.

### Conductor termination

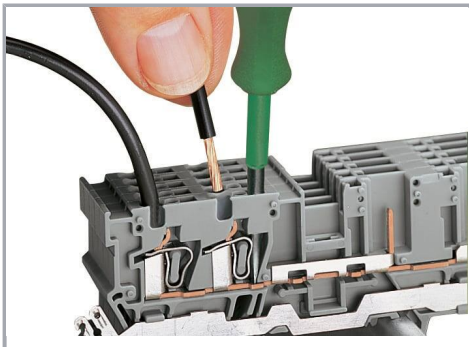


### CAGE CLAMP<sup>®</sup> connection

Carrier terminal block: Insert/remove conductor via operating tool (3.5 x 0.5 mm blade).


Subject to changes. Please also observe the further product documentation!

### Commoning

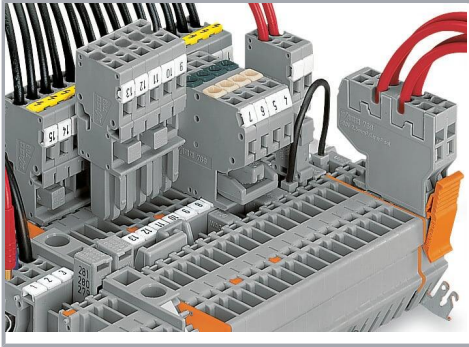


Commoning with adjacent or staggered jumpers.


Push jumpers down until fully inserted.

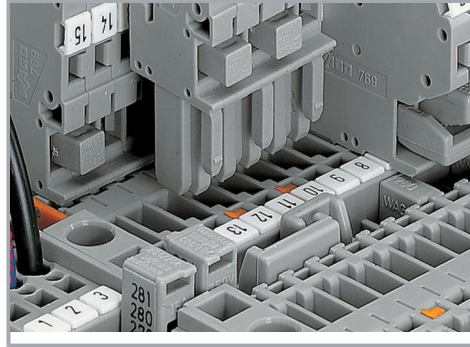

Commoning carrier terminal blocks via staggered jumpers.

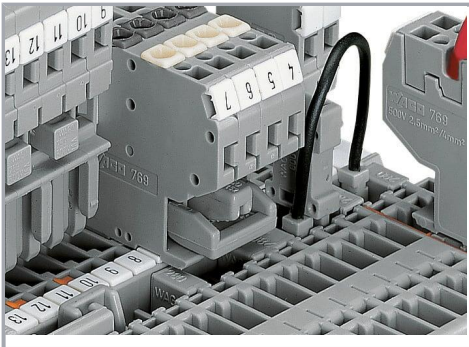


Commoning a 2-conductor female plug via staggered jumper and carrier terminal blocks via adjacent jumpers.

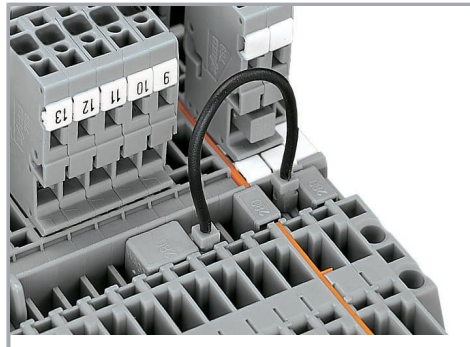


Commoning carrier terminal blocks via push-in type wire jumpers or adjacent jumpers – even over an intermediate plate.

Subject to changes. Please also observe the further product documentation!

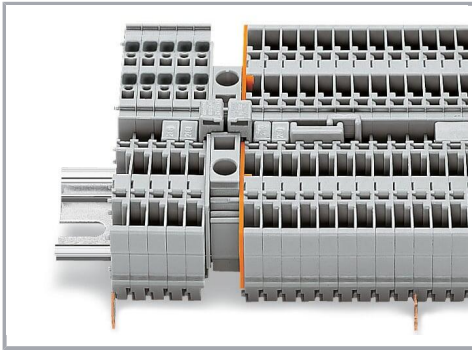

Commoning "supply terminal blocks" (up to 10 mm<sup>2</sup>/8 AWG) with carrier terminal blocks via step-down jumpers.

#### Coding

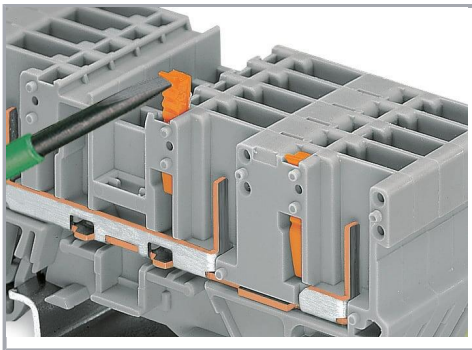


Snap coding pin in proper direction on carrier terminal block.


Shown: Coding pin removal from carrier terminal block.

#### Locking system

Subject to changes. Please also observe the further product documentation!

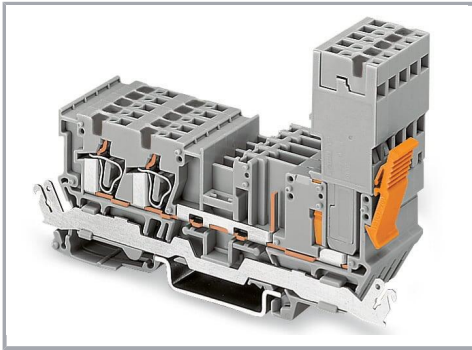

Securing a female plug via locking lever on the terminal block side.

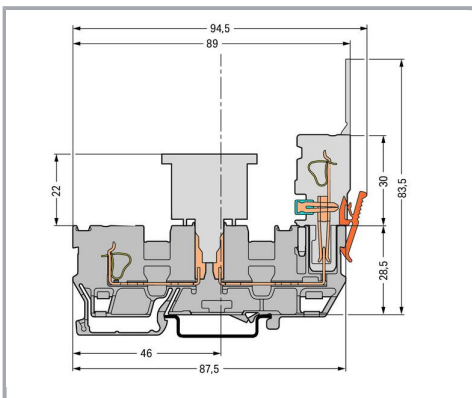

Carrier terminal block

## Product family

**X-COM**

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!