

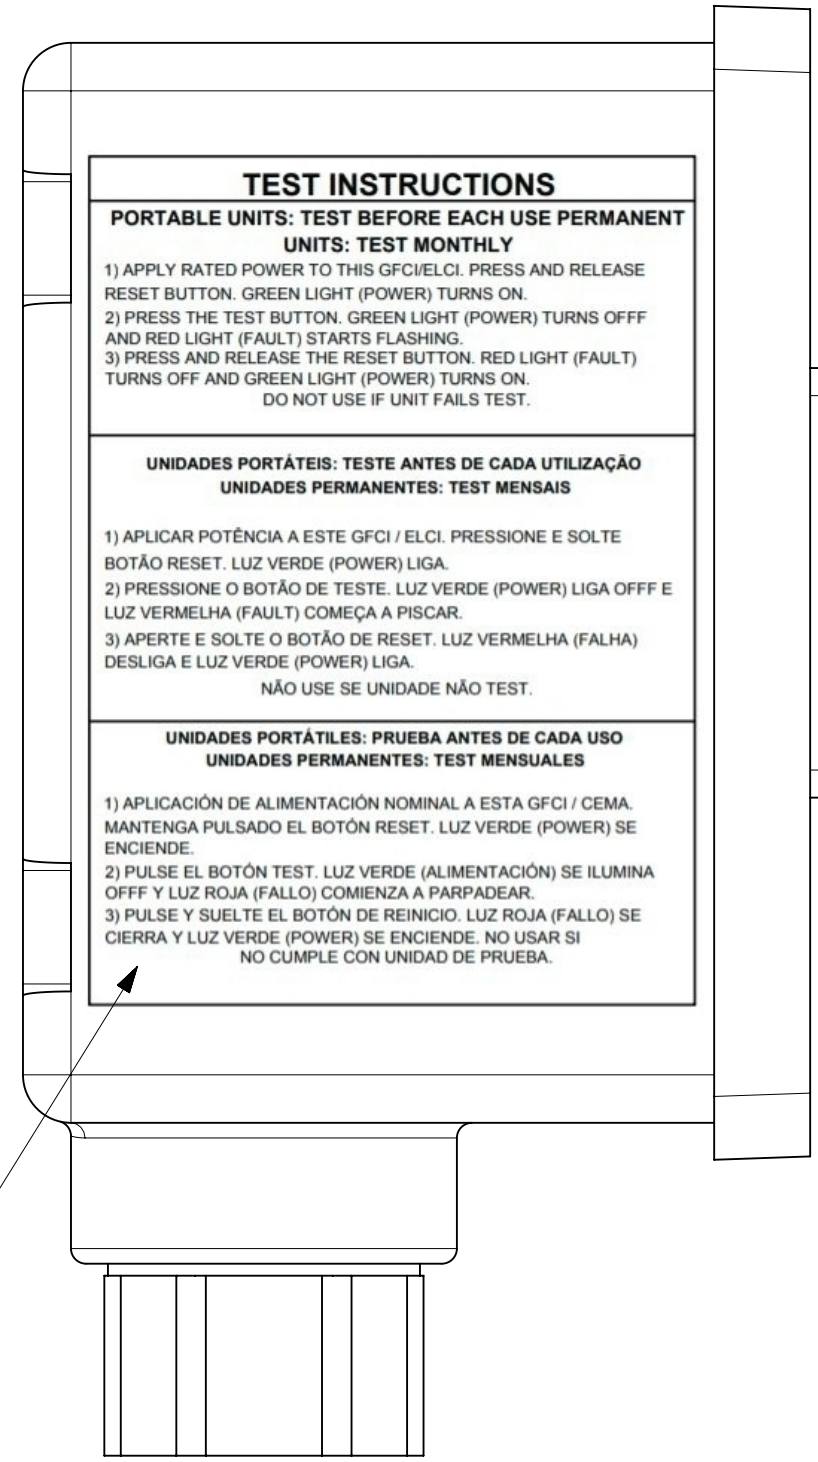



#6-18 X 3/4" PHILLIPS PAN HEAD SHEET METAL SCREW TYPE A, 18-8 STAINLESS STEEL

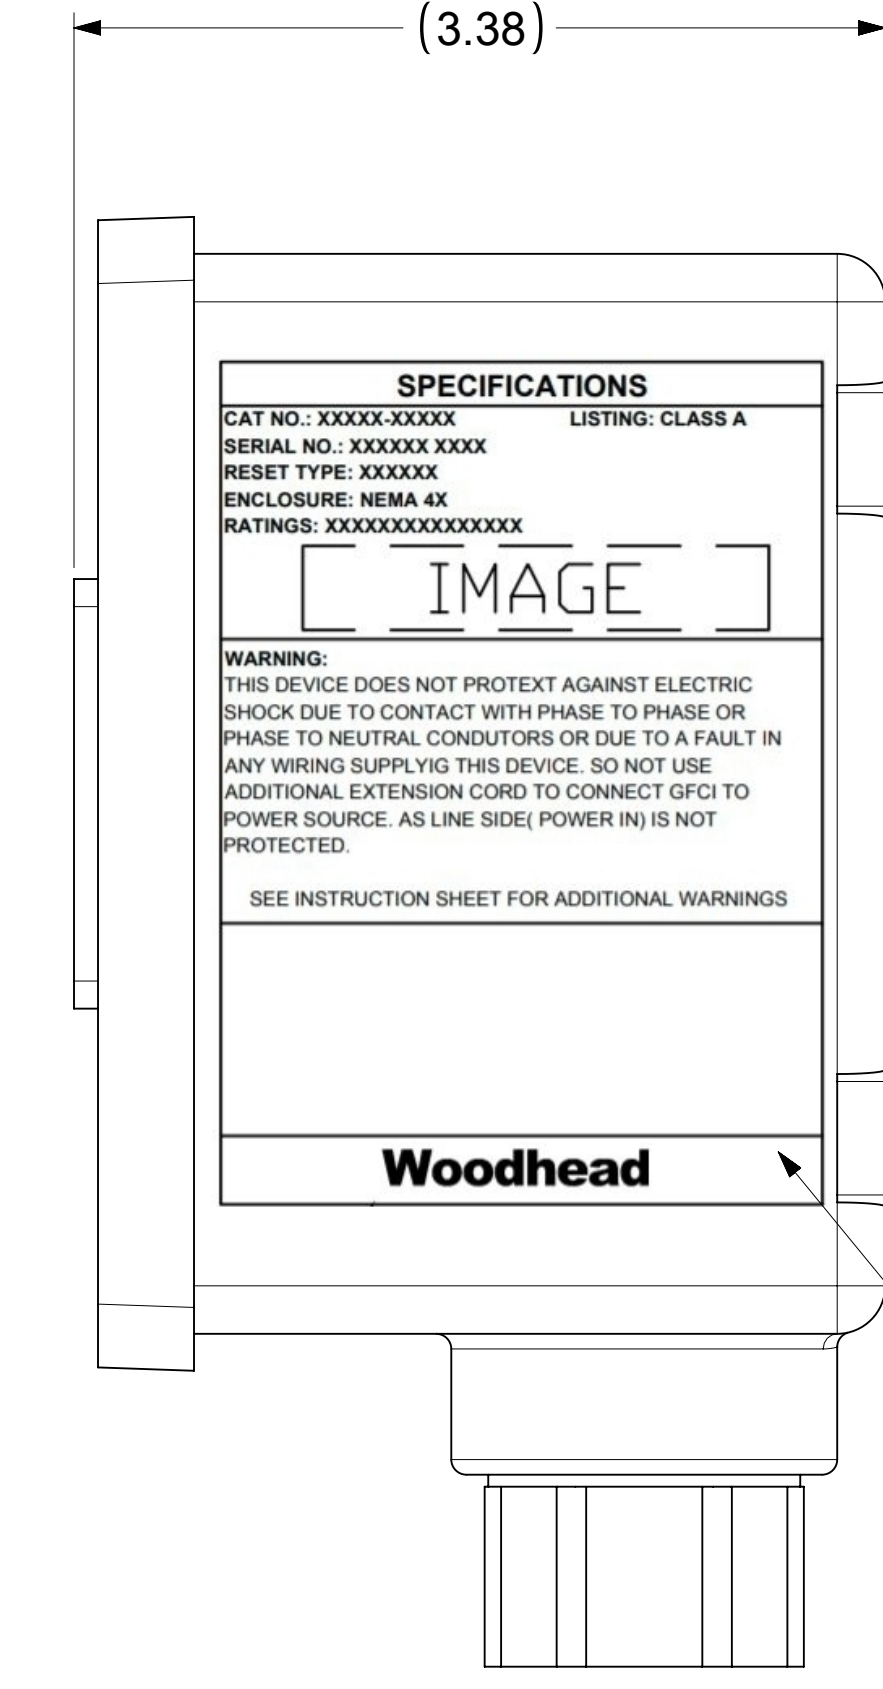

TEST INSTRUCTIONS LABEL

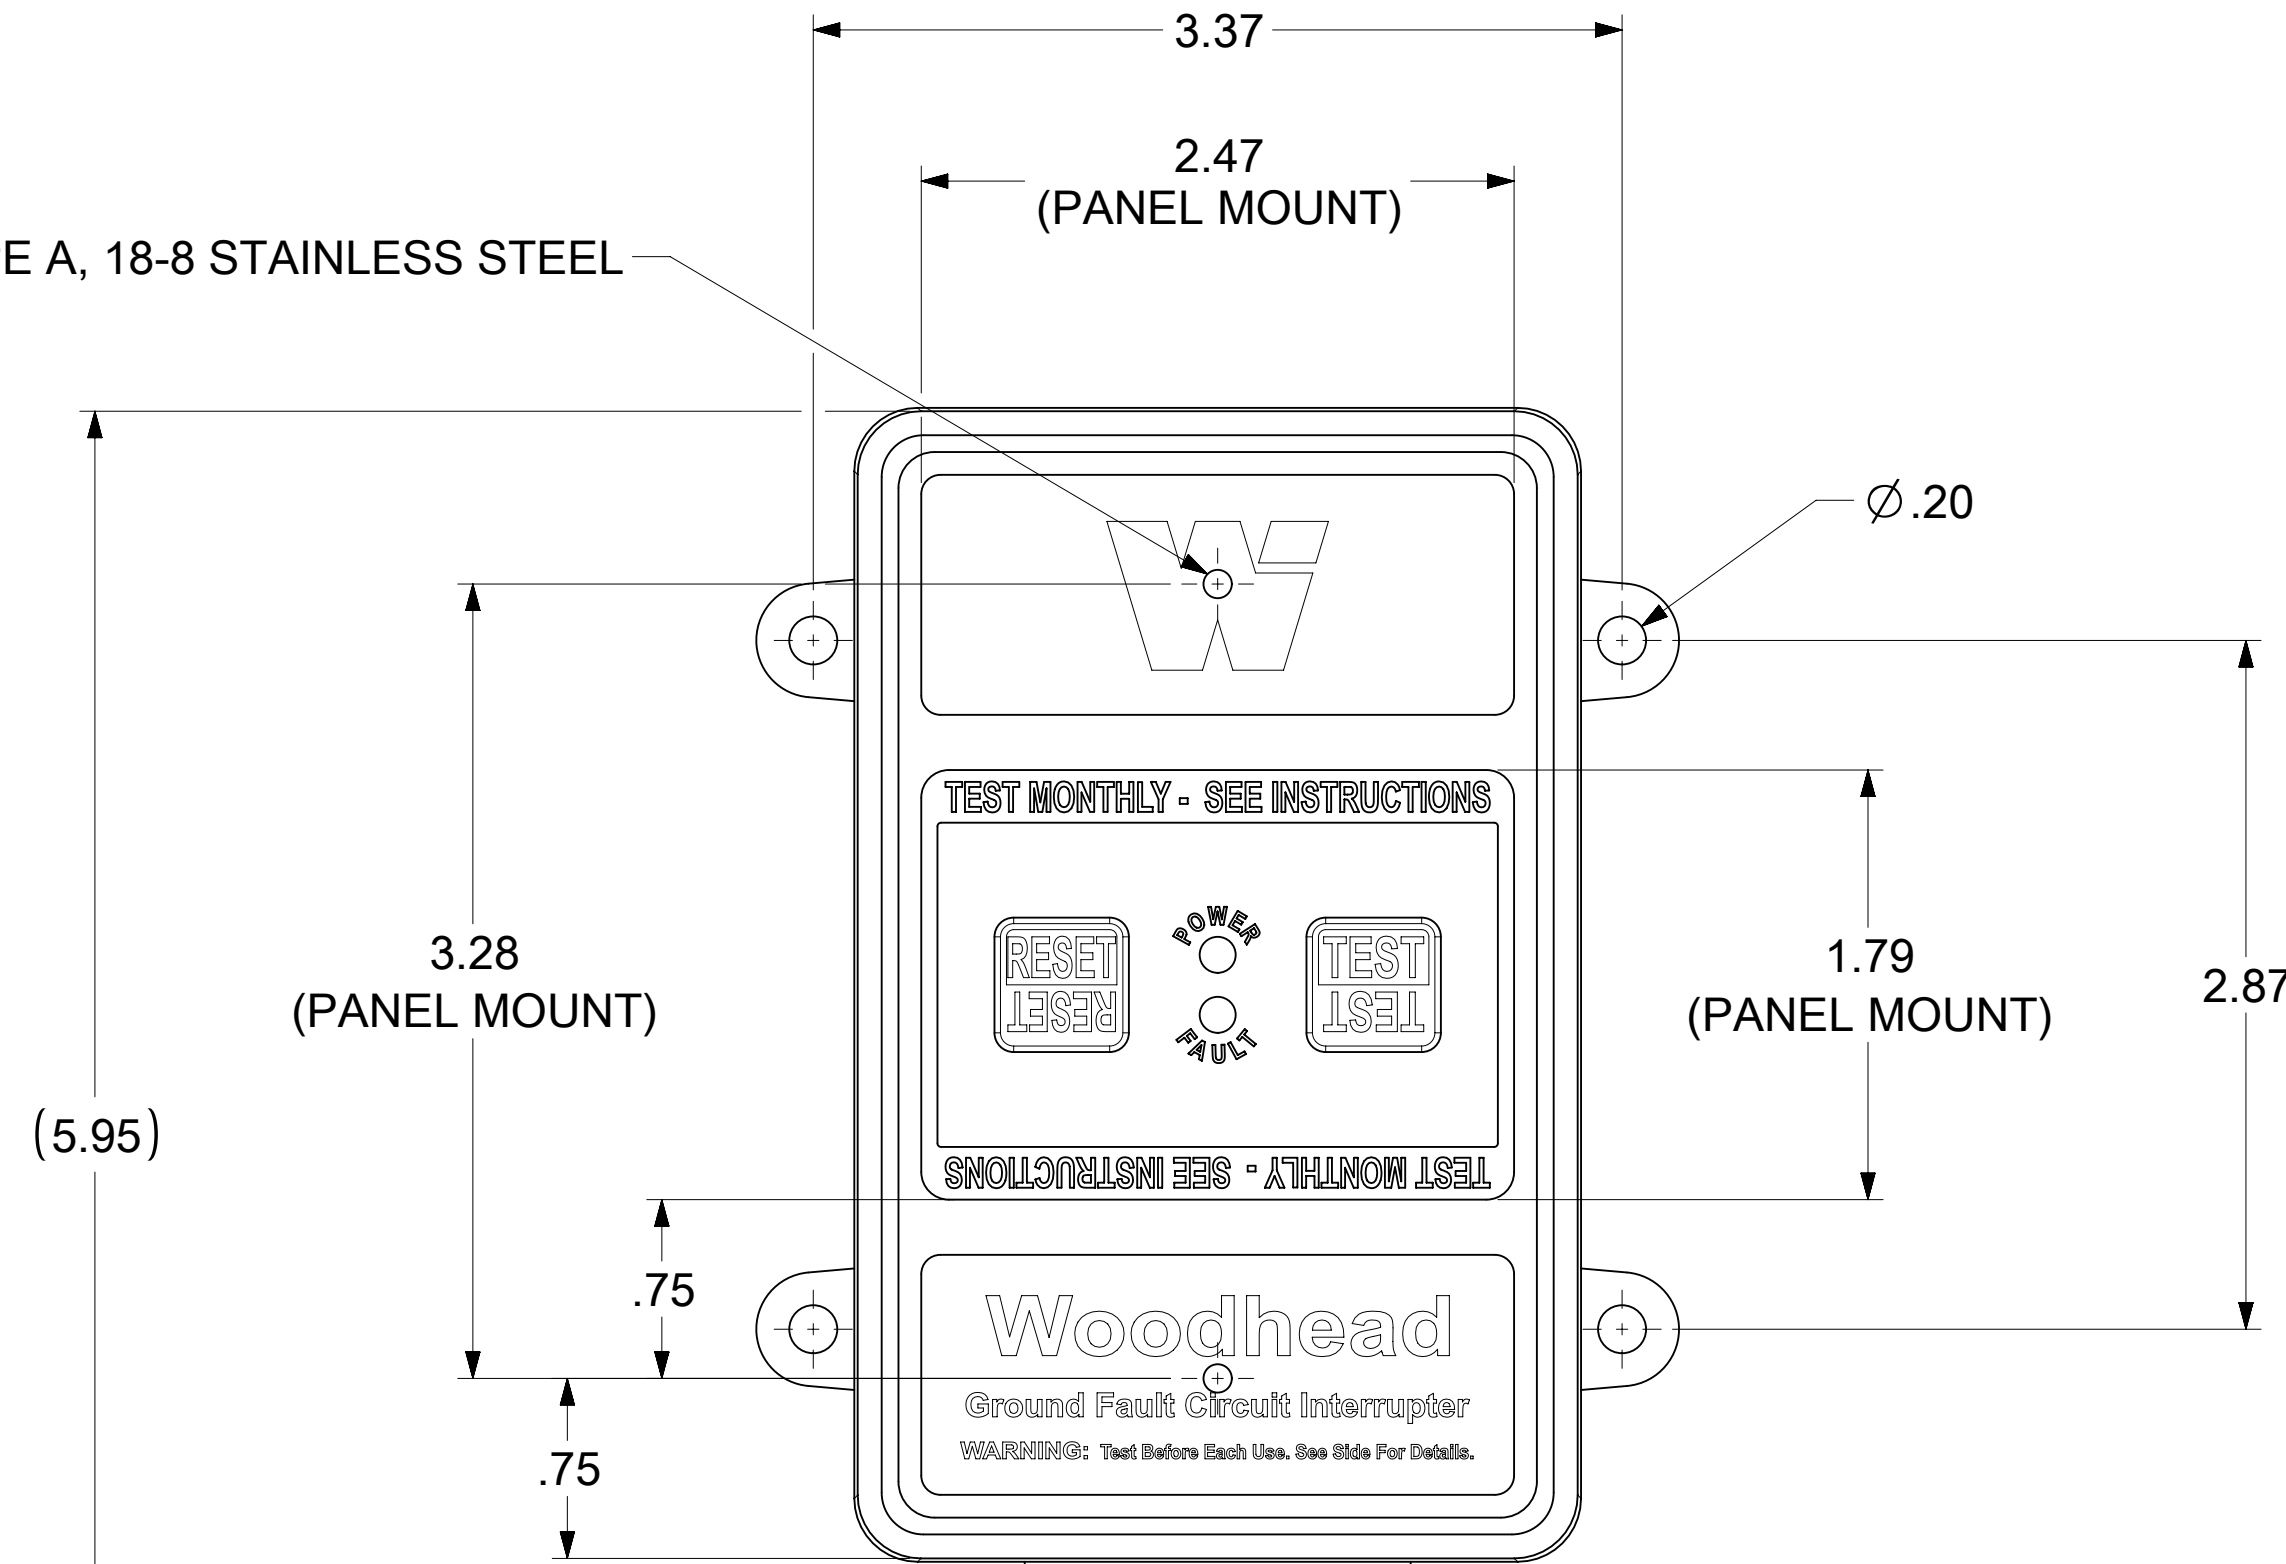

SPECIFICATIONS LABEL

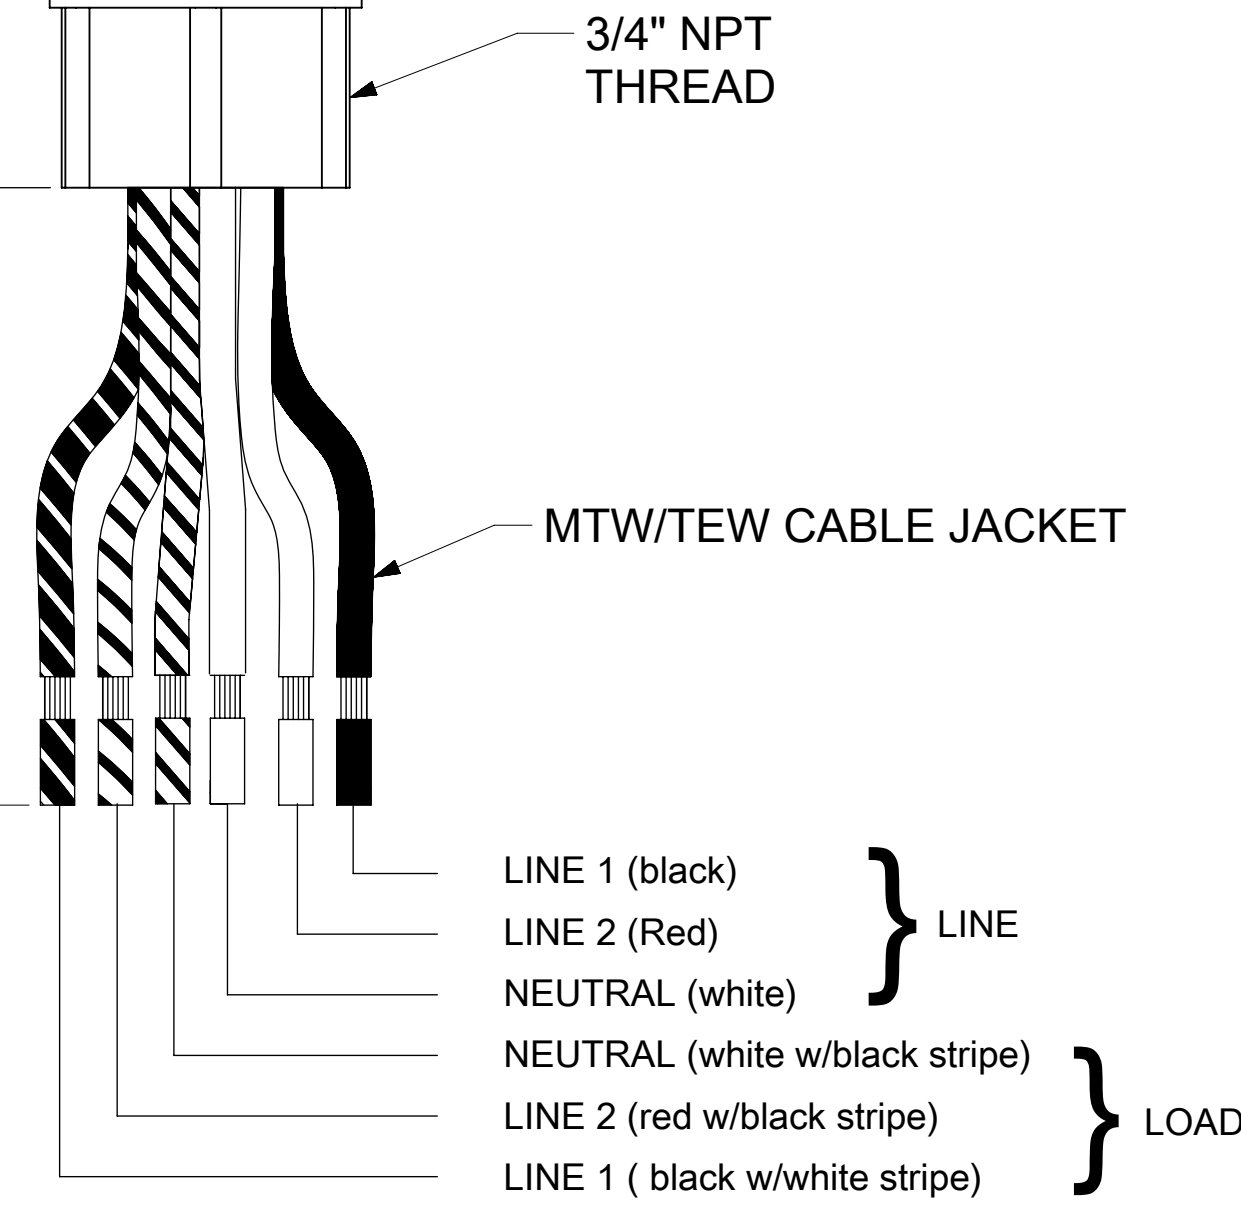

TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	240VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 4X/6P

RESET TYPE	MATERIAL NO.	ENGINEERING NO.	PHASE
MANUAL	1301530264	30051-2MF	SINGLE PHASE
	1301530266	30053-2MF	SINGLE PHASE
AUTOMATIC	1301530263	30051-2AF	SINGLE PHASE
	1301530265	30053-2AF	SINGLE PHASE

FUNCTIONAL SYMBOLS: FA=0, FC=0, FP=0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE: INCH NTS

GENERAL TOLERANCES (UNLESS SPECIFIED):
 4 PLACES ± 0.005
 3 PLACES ± 0.01
 2 PLACES ± 0.13
 1 PLACE ± 0.25
 0 PLACES ± 0.5

ANGULAR TOL ± 0.5°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: MIGRATION TO ECTR/NX

EC NO: 666699
 DRWN: PPURSUTANDEL 2021/07/09
 CHK'D: DNGUYEN62 2021/08/05
 APPR: HKNEELAND 2021/08/17

INITIAL REVISION:
 DRWN: BARDEN 2014/04/25
 APPR: JFMURPHY 2014/08/02

molex

30A 240VAC FIXED GFCI
 SINGLE PHASE #10AWG WIRE LEADS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER: SD-130153-042
 DOC TYPE: PSD
 DOC PART: 001
 REVISION: A1

DRAWING: D-SIZE
 SERIES: 130153
 MATERIAL NUMBER: SEE TABLE
 CUSTOMER: GENERAL MARKET
 SHEET NUMBER: 1 OF 1