
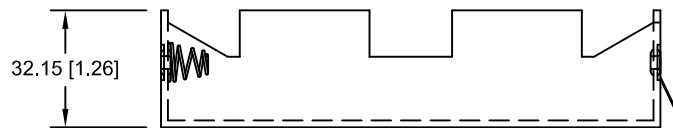


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
09/19/14	D	REDRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
03/03/17	E	DIM. 130.80 WAS 129.03 DIM. 114.55 WAS 96.01 DIM. 55.15 WAS 59.94 DIM. 71.10 WAS 72.14 DIM. 32.15 WAS 30.23	T.B.	B.S.	
03/17/17	F	REDRAWN ADDED DIM. 8.12	T.B.	B.S.	

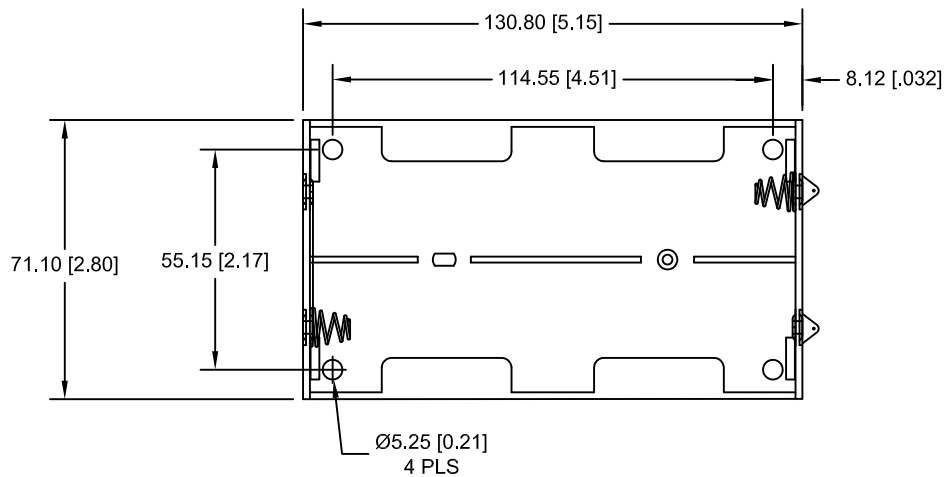


NOTES:

SPECIFICATION:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 RIVETS: BRASS, NICKEL PLATED.  
 SPRING: SPRING STEEL, NICKEL PLATED.  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
 EIA-540J000  
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title 4 "D" CELL HOLDER WITH SOLDER LUGS		
Fractional ± .8 (.030)			
Angular ± 3°	Date 03/17/17	Drawing Number BH24DL	