
<b>–</b>	ц <b>т</b>		





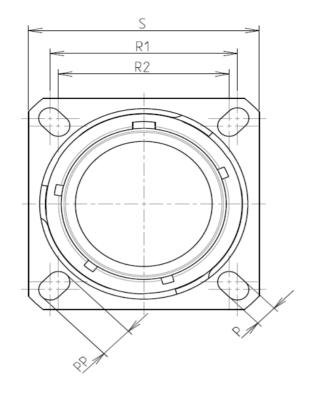

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 11.5 g ± 10%

8D 0

G

11

F

22

Ρ

F

Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-22

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

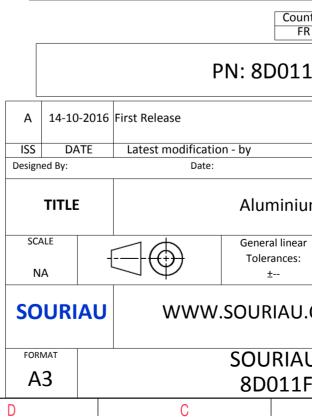

	Φ		A			
	R.C.				4	
AS EXA	AMPLE				3	
s whic er of t ndatio untry FR	non-conformit th does not co he Parties or to n, technical n Jurisd	mply with by a third par			2	
	22911					
		CUSTOME	R DRAWING	MOD N°		
um	um Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 2PN-C			SHEET		
. ୮ ۷	B		A	÷/ 2	J	

4	(	Contact Layout 22*				RUARE FLANGE RECEPTACLE (TYPE 0)
	Ctc A B C	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905 -1.905 -1.905			V (	Dim
3	D	-1.905 1.905				ØA ØAA R1 ØT
						SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend Cour
2					A 14-10-201	FI PN: 8D01: 6 First Release
					ISS DATE Designed By: TITLE	Latest modification - by Date: Aluminiu
4						General linear Tolerances:
			_		FORMAT A3	SOURIA 8D011
	Н	G	F	E	D	C

Т

ш

т

G

0

