



Wimax Monoblock Ceramic Bandpass Filter

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM3425B1003



Electrical specifications

Center Frequency: 3425 MHz
Bandwidth: Fo +/- 25 MHz
Input / Output Impedance: 50 Ohms
Passband: 3412.5-3437.5 MHz
Passband Insertion Loss: 2 dB max
Passband Ripple: 0.5 dB max
Passband Return Loss: 18 dB min
Rejection: 25 dB min @ 3225 MHz
Rejection 2: 8 dB min @ 3501 W0 MHz
Rejection 3: 25 dB min @ 3625 MHz
Power Handling: 1 W

Mechanical




Mounting Method: SMT
Dimensions: 10.6 x 6 x 3.9 mm

Environmental

Operating Temperature: -20°C to 85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

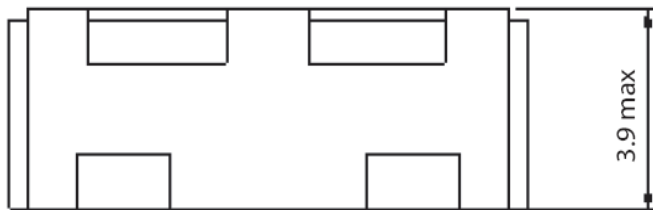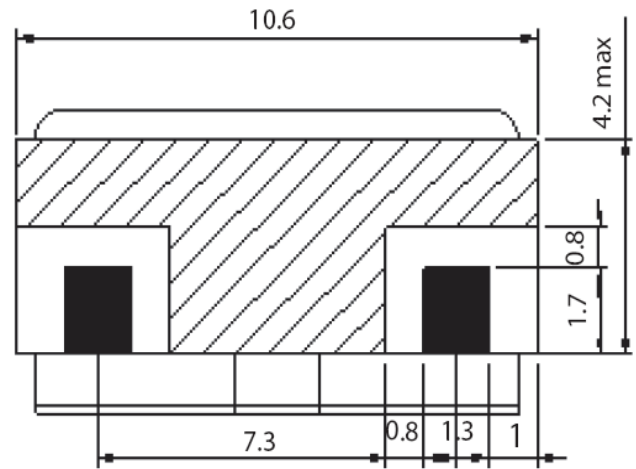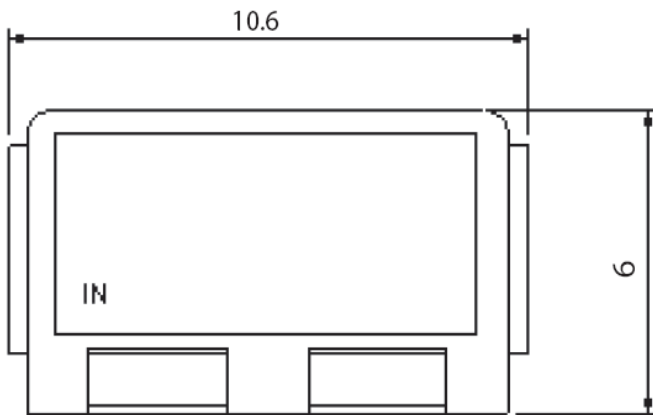

 : I/O PORT

 : GROUND

TOLERANCE UNLESS

OTHERWISE SPECIFIED : ± 0.3

UNITS : mm



Wimax Monoblock Ceramic Bandpass Filter

Part Number: AM3425B1003

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products



Response Plot:

