

www.lemo.com

# FFA.0S.650.CLAC42

## **SUMMARY**

#### # Wires

Triax 1



Image is for illustrative purpose only

Series 0S

Termination type Male solder

IP rating 50

AWG wire size 0.00 - 0.00

Cable Ø 3.80 - 4.40 mm

**Status** active

Alternative part FFA.0S.650.CLAC44

Matching parts ERA.0S.650.CLL

### **Download**

Request a quote

Catalog

## **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model FFA\*: Straight plug, cable collet

Keying Circular, male

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Weight 7.73 g

### **Performance**

 Configuration
 0S.650 : 1 Triax (50 Ohm)

 Insulator
 L: PEEK (UL 94 / V-0/1.5)

Rated Current 6 Amps

## **Specifications**

Contact Type: Triaxial 50 Ohm (Solder)

Contact Dia.: 0.9 mm (0.035"in) Vtest: 1200 V (AC), 1700 V (DC)

Impedance: 50 Ohm VSWR: 1.03 + 0.34 \* f/GHz Cable type: RGT 178, RGT 174

## **Others**


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >144 hr

# **DRAWINGS**

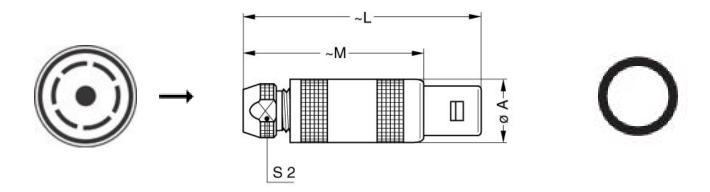

#### **Dimensions**

	А	L	М	S2
mm.	9	34.5	24.5	6.5
in.	0,35	1,36	0,96	0,26

## **RECOMMENDED BY LEMO**

## **Tools**

Spanner wrench: DCD.0S.005.PA065

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

bles	
MO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & m, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his produ ng LEMO components.	a services or use of octs and applications