

MODEL 260 INCREMENTAL ENCODER _



FEATURES

Low Profile 1.19" Up to 12 Pole Commutation Available in Thru-Bore and Hollow Bore (Blind) Simple, Innovative Flexible Mounting System Incorporates Opto-ASIC Technology **CE Marking Available**

With a bore up to 0.625" and a low profile, the Model 260 Accu-Coder™ is the perfect solution for many machine and motor applications. Available in both hollow bore and a complete thru-bore, the Model 260 uses EPC's innovative anti-backlash mounting system, allowing simple, reliable, and precise encoder attachment. Unlike traditional kit or modular encoder designs, its integral bearing set provides stable and consistent operation without concerns for axial or radial shaft runout. For brushless servo motor applications, the Model 260 can be specified with three 120° electrical phase tracks to provide up to 12 pole commutation feedback. The optional extended temperature capability allows servo motors to operate at higher power outputs and duty cycles. And of course, the Model 260 uses EPC's pioneering Opto-ASIC design, so you'll always get a clean, reliable signal.


COMMON APPLICATIONS

Brushless Servo Motor Commutation, Robotics, Motor-Mounted Feedback, Assembly Machines, Digital Plotters, High Power Motors

MODEL 260 ORDERING GUIDE

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

Ø2.0"

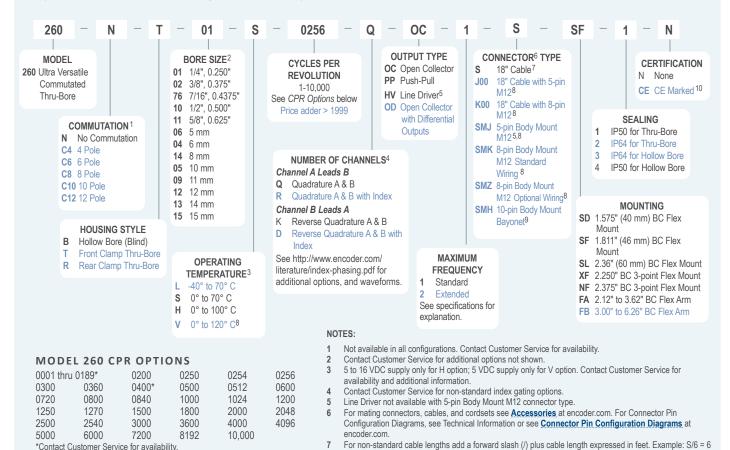

*Contact Customer Service for availability.

Contact Customer Service for other disk resolutions. Not all disk resolutions available with every commutation option.

- Additional cable lengths available. Please consult Customer Service. 9 Not available with commutation.
 - 10 Please refer to Technical Bulletin TB100: When to Choose the CE Mark at encoder.com.

8-pin Body Mount M12 Connector Type not available with commutation or with V temperature option.

feet of cable. Frequency above 300 kHz standard cable lengths only.




MODEL 260 SPECIFICATIONS

Electrical						
Input Voltage	4.75 to 28 VDC for temperatures					
	up to 70° C					
	5 to 16 VDC for 0° to 100° C operating					
	temperature					
	5 VDC for 0° to 120° C operating					
	temperature					
Input Current	130 mA max (< 100 mA typical) with					
	no output load					
Output Format	Incremental – Two square waves in					
	quadrature with channel A leading B					
	for clockwise shaft rotation, as viewed					
	from the mounting face.					
Outrast Tarata	See Waveform Diagrams.					
Output Types	Open Collector – 20 mA max per					
	channel					
	Push-Pull – 20 mA max per channel					
	Line Driver – 20 mA max per channel					
Indov	(Meets RS 422 at 5 VDC supply)					
index	Once per revolution gated to channel					
Max Erecuency	A. See Waveform Diagrams. Standard Frequency Response is					
max. requency	200 kHz for CPR 1 to 2540					
	500 kHz for CPR 2541 to 5000					
	1 MHz for CPR 5001 to 10,000					
	Extended Frequency Response					
	(optional) is 300 kHz for CPR 2000,					
	2048, 2500, and 2540					
Electrical Protection	Reverse voltage and output short					
	circuit protected. NOTE: Sustained					
	reverse voltage may result in					
	permanent damage.					
Noise Immunity	Tested to BS EN61000-6-2; BS					
	EN50081-2; BS EN61000-4-2; BS					
	EN61000-4-3;					
	BS EN61000-4-6, BS EN55011					
Quadrature Edge						
Separation	67.5° electrical or better is typical, 54°					
	electrical minimum at temperatures > 99° C					
Accuracy	Within 0.01° mechanical from one cycle					
Accuracy	to any other cycle, or 0.6 arc minutes.					
Commutation	Up to 12 pole. Contact Customer					
Commutation	Service for availability.					
Comm. Accuracy						
comm. Accuracy	i meenamea.					
Mechanical						
Max Shaft Speed	7500 RPM. Higher shaft speeds may					
	be achievable, contact Customer					
	Service. Note: For extreme					
	temperature operation, de-rate					
	temperature by 5° C for every 1000					
D T I	RPM above 3000 RPM.					
	0.0000" / +0.0006"					
User Shaft Tolerand						
Radial Runout						
Axial Endplay	±0.030 max IP50 Thru-Bore: 0.50 oz-in					
Starting forque	IP50 Hollow Bore: 0.30 oz-in					
	IPS0 Hollow Bore: 0.30 oz-in IP64 Thru-Bore: 2.50 oz-in					
	IP64 Hollow Bore: 2.0 oz-in					
	Note: Add 3.0 oz-in for -40° C					
	operation					
Moment of Inertia	$3.9 \times 10^{-4} \text{ oz-in-sec}^2$					
	Non-corrosive material					
Weight						
Environmental						
Storage Temp						
	98% RH non-condensing					
	10 g @ 58 to 500 Hz					
Shock	50 g @ 11 ms duration					
	IP50: IP64 available					

Sealing.....IP50; IP64 available


MODEL 260 WITH FRONT SHAFT CLAMP (T)

WITH 1.811" (46 MM) BC SLOTTED FLEX (SF)

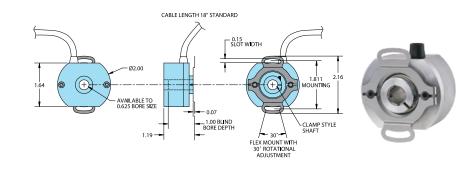


MODEL 260 REAR CLAMP (R)

WITH 1.811" (46 MM) BC SLOTTED FLEX (SF)

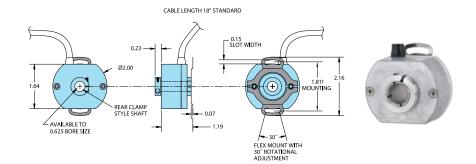


THREE POINT FLEX MOUNT (XF, NF)

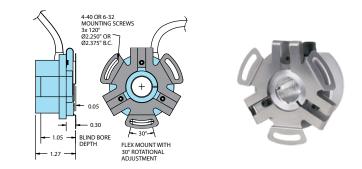


All dimensions are in inches with a tolerance of ±0.005" or ±0.01" unless otherwise specified.




1.575" (40 MM) BC FLEX MOUNT (SD)




1.06" TO 1.81" FLEX ARM (FA)



2.36" (60 MM) BC FLEX MOUNT (SL)



1.50" TO 3.13" FLEX ARM (FB)



All dimensions are in inches with a tolerance of ± 0.005 " or ± 0.01 " unless otherwise specified.













MODEL 260 CONNECTOR OPTIONS

BODY MOUNT 10-PIN BAYONET (SMH)




BODY MOUNT M12 (SMJ, SMK)



All dimensions are in inches with a tolerance of ±0.005" or ±0.01" unless otherwise specified.

WAVEFORM DIAGRAMS

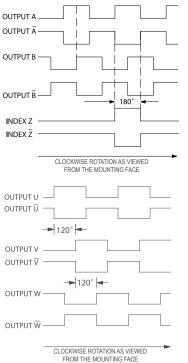

FROM THE MOUNTING FACE NOTE: ALL DEGREE REFERENCES ARE ELECTRICAL DEGREES WAVE-FORM SHOWN WITH OPTIONAL COMPLEMENTARY SIGNALS Ä, B, Ž FOR HV AND OD OUTPUTS ONLY.

WIRING TABLE

For EPC-supplied mating cables, refer to wiring table provided with cable. Trim back and insulate unused wires.

Function	Flying Leads Cable [†] Wire Colors	5-pin M12**	8-pin M12** Standard Wiring	8-pin M12** Optional Wiring	10-pin Bayonet ⁺
Com	Black	3	7	1	F
+VDC	White	1	2	2	D
А	Brown	4	1	3	А
A'	Yellow	-	3	4	Н
В	Red	2	4	5	В
В'	Green	-	5	6	J
Z	Orange	5	6	7	С
Z'	Blue	_	8	8	К
U	Violet	-	-	-	-
U'	Gray	_	-	-	_
V	Pink	-	-	-	-
V	Tan	-	-	_	_
W	Red/Green	-	-	-	-
W'	Red/Yellow	_	_	_	_
Shield	Bare*	-	-	-	-

[†]Standard cable for non-commutated models is 24 AWG For commutated units, conductors are 28 AWG.

*CE Option: Cable shield (bare wire) is connected to internal case.

**CE Option: Use cable cordset with shield connected to M12 connector coupling nut.

⁺CE Option: Pin G is connected to internal case.