# Cree® P4 LED CP41B-WES/WGS



## **PRODUCT DESCRIPTION**

This revolutionary package design allows the lighting designer to reduce the number of LEDs required and provide a more uniform and unique illuminated appearance than with other LED solutions.

This is possible through the efficient optical-package design and high-current capabilities. The low-profile package can be easily coupled with reflectors or lenses to efficiently distribute light and provide the desired lit appearance. This product family employs green and blue LED materials, which allows designers to match the color of many lighting applications such as vehicle signal lamps and amusement lighting.

#### **FEATURES**

- Size (mm): 7.6 X 7.6
- Color Temperatures: Cool White: Min . (4600K) / Typical (9000K)
- Luminous Flux (mlm): CP41B-WES:(3850-11000) CP41B-WGS:(3850-11000)
- Viewing angle: CP41B-WES: 60 degree CP41B-WGS: 90 degree
- Lead-Free
- RoHS Compliant

## **APPLICATIONS**

- Channel Letter
- Amusement



# ABSOLUTE MAXIMUM RATINGS $(T_A = 25^{\circ}C)$

Items	Symbol	Absolute Maximum Rating	Unit
		CP41B-WES/WGS	
Forward Current	$I_{_{\rm F}}$	35	mA
Peak Forward Current Note	$I_{_{FP}}$	100	mA
Reverse Voltage	$V_{R}$	5	V
Power Dissipation	$P_{_{\mathrm{D}}}$	154	mW
Operation Temperature	$T_{opr}$	-40 ~ +95	°C
Storage Temperature	$T_{stg}$	-40 ~ +100	°C
Lead Soldering Temperature	$T_{sol}$		C for 3 sec. max. pase of the epoxy bulb)

**Note:** Pulse width  $\leq 0.1$  msec, duty  $\leq 1/10$ .

## TYPICAL ELECTRICAL & OPTICAL CHARACTERISTICS ( $T_A = 25^{\circ}C$ )

Characteristics	Color	Symbol	Condition	Unit	Minimum	Typical	Maximum
Forward Voltage	CP41B-WES/WGS	$V_{\scriptscriptstyle F}$	$I_F = 30 \text{ mA}$	V		3.6	4.4
Reverse Current	CP41B-WES/WGS	$I_R$	$V_R = 5 V$	μΑ			100
Luminous Flux	CP41B-WES/WGS	$\Phi_{\rm v}$	$I_F = 30 \text{ mA}$	mlm	3850	7000	
Luminous Intensity	CP41B-WES	$I_{v}$	$I_F = 30 \text{ mA}$	mcd		5200	
Luminous Intensity	CP41B-WGS	$I_{V}$	$I_F = 30 \text{ mA}$	mcd		3000	
Chromaticity	CP41B-WES/WGS	×	$I_F = 30 \text{ mA}$			0.2895	
Coordinates	CP41B-WES/WGS	У	$I_F = 30 \text{ mA}$			0.2905	
50% Power Angle	CP41B-WES	2θ1⁄2	$I_F = 30 \text{ mA}$	deg		60	
50% Power Angle	CP41B-WGS	2θ1/2	$I_F = 30 \text{ mA}$	deg		90	

**Note:** Continuous reverse voltage can cause LED damage.



Cool White(CP41B-WES/WGS)

Bin Code	Min.(mlm)	Max.(mlm)
K0	3850	4400
L0	4400	5500
M0	5500	6600
N0	6600	8730
P0	8730	11000

ullet Tolerance of measurement of luminous flux is  $\pm 15\%$ 

# VF BIN LIMIT ( $I_F = 30 \text{ mA}$ )

Cool White (CP41B-WES/WGS)

Bin Code	Min.(V)	Max.(V)
27	2.8	3.0
28	3.0	3.2
29	3.2	3.4
2a	3.4	3.6
2b	3.6	3.8
2c	3.8	4.0
2d	4.0	4.2
2e	4.2	4.4

• Tolerance of measurement of VF is ±0.05V.



Bin Code	Sub- bin	x	у
		0.2449	0.2288
		0.2497	0.2384
	Wa1	0.2543	0.2356
		0.2497	0.2267
		0.2497	0.2267
	W-2	0.2543	0.2356
	Wa2	0.2589	0.2328
		0.2545	0.2245
		0.2497	0.2384
	W- 2	0.2545	0.2480
	Wa3	0.2589	0.2445
		0.2543	0.2356
		0.2543	0.2356
	Wa4	0.2589	0.2445
	Wa4	0.2633	0.2410
W1		0.2589	0.2328
VV I		0.2545	0.2245
	Wb1	0.2589	0.2328
	WDI	0.2635	0.2299
		0.2593	0.2223
		0.2593	0.2223
	Wb2	0.2635	0.2299
	WDZ	0.2680	0.2270
		0.2640	0.2200
		0.2589	0.2328
	Wb3	0.2633	0.2410
	WDS	0.2677	0.2375
		0.2635	0.2299
		0.2635	0.2299
	Wh4	0.2677	0.2375
	Wb4	0.2720	0.2340
		0.2680	0.2270

Bin	Sub-	х	у
Code	bin	0.2545	0,2480
		0.2593	0.2480
	Wc1	0.2635	0.2573
		0.2589	0.2334
		0.2589	0.2445
		0.2635	0.2534
	Wc2	0.2677	0.2334
		0.2677	0.2493
		0.2593	0.2410
		0.2593	0.2575
	Wc3		
		0.2680	0.2623
		0.2635	0.2534
		0.2635	0.2534
	Wc4	0.2680	0.2623
		0.2720	0.2575
W1		0.2677	0.2493
		0.2633	0.2410
	Wd1	0.2677	0.2493
		0.2718	0.2451
		0.2677	0.2375
		0.2677	0.2375
	Wd2	0.2718	0.2451
	Wuz	0.2760	0.2410
		0.2720	0.2340
		0.2677	0.2493
	Wd3	0.2720	0.2575
	wus	0.2760	0.2528
		0.2718	0.2451
		0.2718	0.2451
	١٨١ ما ٨	0.2760	0.2528
	Wd4	0.2800	0.2480
		0.2760	0.2410

Bin Code	Sub- bin	x	у
		0.2640	0.2670
	We1	0.2688	0.2765
	wei	0.2726	0.2711
		0.2680	0.2623
		0.2680	0.2623
	We2	0.2726	0.2711
	vvez	0.2764	0.2658
		0.2720	0.2575
		0.2688	0.2765
	We3	0.2735	0.2860
	wes	0.2772	0.2800
		0.2726	0.2711
		0.2726	0.2711
	VA/- 4	0.2772	0.2800
	We4	0.2808	0.2740
W2		0.2764	0.2658
VV Z		0.2720	0.2575
	Wf1	0.2764	0.2658
	AALT	0.2802	0.2604
		0.2760	0.2528
		0.2760	0.2528
	Wf2	0.2802	0.2604
	VVIZ	0.2840	0.2550
		0.2800	0.2480
		0.2764	0.2658
	Wf3	0.2808	0.2740
	VVIS	0.2844	0.2680
		0.2802	0.2604
		0.2802	0.2604
	Wf4	0.2844	0.2680
	VV14	0.2880	0.2620
		0.2840	0.2550

• Tolerance of measurement of the color coordinates is  $\pm 0.01$ .



Bin Code	Sub- bin	x	у
Code	DIII	0,2735	0,2860
		0.2783	0.2955
	Wg1	0.2817	0.2889
		0.2772	0.2800
		0.2772	0.2800
		0.2817	0.2889
	Wg2	0.2852	0.2823
		0.2808	0.2740
		0.2783	0.2955
		0.2830	0.3050
	Wg3	0.2863	0.2978
		0.2817	0.2889
		0.2817	0.2889
		0.2863	0.2978
	Wg4	0.2895	0.2905
14/0		0.2852	0.2823
W2		0.2808	0.2740
	14/1 4	0.2852	0.2823
	Wh1	0.2886	0.2756
		0.2844	0.2680
		0.2844	0.2680
	Wh2	0.2886	0.2756
	VVIIZ	0.2920	0.2690
		0.2880	0.2620
		0.2852	0.2823
	Wh3	0.2895	0.2905
	VVIIS	0.2928	0.2833
		0.2886	0.2756
		0.2886	0.2756
	Wh4	0.2928	0.2833
	Wn4	0.2960	0.2760
		0.2920	0.2690

Bin Code	Sub- bin	x	у
		0.2830	0.3050
	\A/:-1	0.2890	0.3130
	Wj1	0.2918	0.3048
		0.2863	0.2978
		0.2863	0.2978
	wea	0.2918	0.3048
	Wj2	0.2947	0.2967
		0.2895	0.2905
		0.2890	0.3130
	wea	0.2950	0.3210
	Wj3	0.2974	0.3119
		0.2918	0.3048
		0.2918	0.3048
	\A/: 4	0.2974	0.3119
	Wj4	0.2998	0.3028
W3		0.2947	0.2967
VVS		0.2895	0.2905
	Wk1	0.2947	0.2967
	WKI	0.2975	0.2890
		0.2928	0.2833
		0.2928	0.2833
	Wk2	0.2975	0.2890
	VVKZ	0.3003	0.2813
		0.2960	0.2760
		0.2947	0.2967
	Wk3	0.2998	0.3028
	VVV	0.3022	0.2946
		0.2975	0.2890
		0.2975	0.2890
	Wk4	0.3022	0.2946
	Wk4	0.3045	0.2865
		0.3003	0.2813

Bin	Sub-		
Code	bin	х	У
		0.2950	0.3210
	Wm1	0.3010	0.3290
	AALLIT	0.3030	0.3190
		0.2974	0.3119
		0.2974	0.3119
	Wm2	0.3030	0.3190
	VVIIIZ	0.3050	0.3090
		0.2998	0.3028
		0.3010	0.3290
	Wm3	0.3070	0.3370
	VVIII3	0.3085	0.3260
		0.3030	0.3190
		0.3030	0.3190
	Wm4	0.3085	0.3260
	VVIII4	0.3100	0.3150
W3		0.3050	0.3090
VVS		0.2998	0.3028
	Wn1	0.3050	0.3090
	AAIIT	0.3070	0.3005
		0.3022	0.2946
		0.3022	0.2946
	Wn2	0.3070	0.3005
	VVIIZ	0.3090	0.2920
		0.3045	0.2865
		0.3050	0.3090
	Wn3	0.3100	0.3150
	WIID	0.3115	0.3060
		0.3070	0.3005
		0.3070	0.3005
	Wn4	0.3115	0.3060
	VV (14	0.3130	0.2970
		0.3090	0.2920

• Tolerance of measurement of the color coordinates is  $\pm 0.01$ .



Bin Code	Sub- bin	x	у
		0.3070	0.3370
	\A/1	0.3130	0.3430
	Wp1	0.3140	0.3320
		0.3085	0.3260
		0.3085	0.3260
	Wn2	0.3140	0.3320
	Wp2	0.3150	0.3210
		0.3100	0.3150
		0.3130	0.3430
	Wn2	0.3190	0.3490
	Wp3	0.3195	0.3380
		0.3140	0.3320
		0.3140	0.3320
	\\/ m 4	0.3195	0.3380
	Wp4	0.3200	0.3270
W4		0.3150	0.3210
VV 4		0.3100	0.3150
	Wq1	0.3150	0.3210
	wqı	0.3163	0.3118
		0.3115	0.3060
		0.3115	0.3060
	Wq2	0.3163	0.3118
	wyz	0.3175	0.3025
		0.3130	0.2970
		0.3150	0.3210
	Wq3	0.3200	0.3270
	VVQS	0.3208	0.3173
		0.3163	0.3118
		0.3163	0.3118
	Wq4	0.3208	0.3173
	wq <del>q</del>	0.3215	0.3075
		0.3175	0.3025

Bin Code	Sub- bin	x	у
		0.3190	0.3490
		0.3245	0.3545
	Wr1	0.3248	0.3438
		0.3195	0.3380
		0.3195	0.3380
		0.3248	0.3438
	Wr2	0.3250	0.3330
		0.3200	0.3270
		0.3245	0.3545
	W(-2	0.3300	0.3600
	Wr3	0.3300	0.3495
		0.3248	0.3438
		0.3248	0.3438
	Wr4	0.3300	0.3495
	VV Г-4	0.3300	0.3390
W4		0.3250	0.3330
VV4		0.3200	0.3270
	VA/1	0.3250	0.3330
	Ws1	0.3255	0.3230
		0.3208	0.3173
		0.3208	0.3173
	Ws2	0.3255	0.3230
	VVSZ	0.3260	0.3130
		0.3215	0.3075
		0.3250	0.3330
	Ws3	0.3300	0.3390
	WSS	0.3300	0.3285
		0.3255	0.3230
		0.3255	0.3230
	Wa4	0.3300	0.3285
	Ws4	0.3300	0.3180
		0.3260	0.3130

Bin Code	Sub- bin	x	У
	Wt1	0.3300	0.3600
		0.3378	0.3663
		0.3375	0.3563
		0.3300	0.3495
	Wt2	0.3300	0.3495
		0.3375	0.3563
	VVLZ	0.3372	0.3463
		0.3300	0.3390
	Wt3	0.3378	0.3663
		0.3455	0.3725
		0.3449	0.3630
		0.3375	0.3563
		0.3375	0.3563
	Wt4	0.3449	0.3630
		0.3443	0.3535
W5		0.3372	0.3463
WS	Wu1	0.3300	0.3390
		0.3372	0.3463
		0.3368	0.3363
		0.3300	0.3285
	Wu2	0.3300	0.3285
		0.3368	0.3363
		0.3365	0.3263
		0.3300	0.3180
	Wu3	0.3372	0.3463
		0.3443	0.3535
		0.3437	0.3440
		0.3368	0.3363
	Wu4	0.3368	0.3363
		0.3437	0.3440
		0.3430	0.3345
		0.3365	0.3263

• Tolerance of measurement of the color coordinates is  $\pm 0.01$ .




Bin	Sub-	x	у
Code	bin	^	y
		0.3455	0.3725
	Wv1	0.3533	0.3788
		0.3523	0.3698
		0.3449	0.3630
	Wv2	0.3449	0.3630
		0.3523	0.3698
		0.3514	0.3608
		0.3443	0.3535
		0.3533	0.3788
	Wv3	0.3610	0.3850
	WV3	0.3598	0.3765
		0.3523	0.3698
		0.3523	0.3698
	Wv4	0.3598	0.3765
		0.3585	0.3680
W5		0.3514	0.3608
WS		0.3443	0.3535
	Ww1	0.3514	0.3608
		0.3505	0.3518
		0.3437	0.3440
	Ww2	0.3437	0.3440
		0.3505	0.3518
		0.3495	0.3428
		0.3430	0.3345
	Ww3	0.3514	0.3608
		0.3585	0.3680
		0.3573	0.3595
		0.3505	0.3518
	Ww4	0.3505	0.3518
		0.3573	0.3595
		0.3560	0.3510
		0.3495	0.3428

ullet Tolerance of measurement of the color coordinates is  $\pm 0.01$ .



## **CIE CHROMATICITY DIAGRAM**

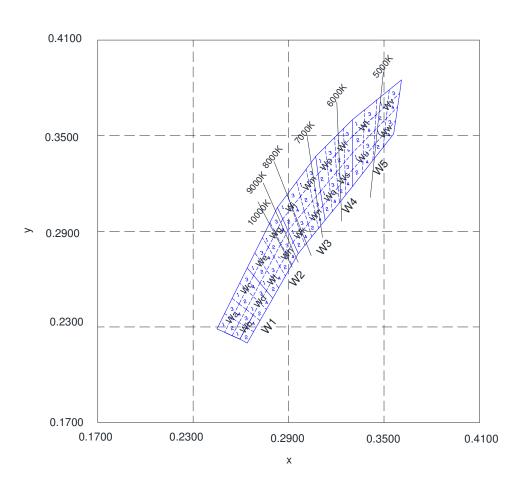



## **ORDER CODE TABLE\***

Cool White (60 degree)

Color	Kit Number	Viewing Angle	Luminous Flux (mlm)		
Coloi			Min.	Max.	Color Bin Code
Cool White	CP41B-WES-CK0P0154	60	3850	11000	W1,W2,W3,W4,W5
Cool White	CP41B-WES-CL0P0134	60	4400	11000	W1,W2,W3
Cool White	CP41B-WES-CM0P0134	60	5500	11000	W1,W2,W3
Cool White	Cool White CP41B-WES-CM0P0234		5500	11000	W2,W3
Cool White	CP41B-WES-CM0P0244	60	5500	11000	W2,W3,W4
Cool White	CP41B-WES-CN0P0134	60	6600	11000	W1,W2,W3

## Cool White (90 degree)

Color	Kit Number	Viewing Angle	Luminous Flux (mlm)		
Coloi			Min.	Max.	Color Bin Code
Cool White	CP41B-WGS-CK0P0154	90	3850	11000	W1,W2,W3,W4,W5
Cool White	CP41B-WGS-CL0P0134	90	4400	11000	W1,W2,W3
Cool White	CP41B-WGS-CM0P0134	90	5500	11000	W1,W2,W3
Cool White	CP41B-WGS-CM0P0234	90	5500	11000	W2,W3
Cool White	CP41B-WGS-CM0P0244	90	5500	11000	W2,W3,W4
Cool White	CP41B-WGS-CN0P0134	90	6600	11000	W1,W2,W3

## Notes:

- The above kit numbers represent order codes which include multiple flux-bin and color-bin codes.
  Only one flux-bin code and one color-bin code will be shipped on each reel.
  And single flux-bin code, single color bin-codes will not be orderable.
- 2. Please refer to the "Cree LED Lamp Reliability Test Standards" document #1 for reliability test conditions.
- 3. Please refer to the "Cree LED Lamp Soldering & Handling" document #2 for information about how to use this LED product safely.

- #1: Refer to http://www.cree.com/led-components/media/documents/LED\_Lamp\_Reliability\_Test\_Standard.pdf
- #2: Refer to http://www.cree.com/led-components/media/documents/sh-HB.pdf

## **GRAPHS**




FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE




FIG.3 RELATIVE LUMINDUS FLUX VS. FORWARD CURRENT




FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.






FIG.5 MAXIMUM FORWARD CURRENT VS. AMBIENT TEMPERATURE(Tjmax=120°C)





The above data are collected from statistical figures that do not necessarily correspond to the actual parameters of each single LED. Hence, these data will be changed without further notice.




## **MECHANICAL DIMENSIONS**

All dimensions are in mm. Tolerance is  $\pm 0.25$  mm unless otherwise noted.


An epoxy meniscus extend about 1.5 mm down the leads.

All metal burr dimension is 0.2 mm max.

## CP41B-WES:



## CP41B-WGS:



## **NOTES**

## RoHS Compliance

The levels of RoHS-restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application in accordance with EU Directive 2011/65/EC (RoHS2), as implemented by EU member states on January 2, 2013 and amended on March 31, 2015 by EU Directive 2015/863/EU.

RoHS Declarations for this product can be obtained from your Cree representative or from the Product Ecology section of the Cree website.

## Vision Advisory Claim


Users should be cautioned not to stare at the light of this LED product. The bright light can damage the eye.



## KIT NUMBER SYSTEM

All dimensions in mm.Cree LED lamps are tested and sorted into performance bins. A bin is specified by ranges of color, forward voltage, and brightness. Sorted LEDs are packaged for shipping in various convenient options. Please refer to the "Cree LED Lamp Packaging Standard" document for more information about shipping and packaging options.

Cree LEDs are sold by order codes in combinations of bins called kits. Order codes are configured in the following manner:

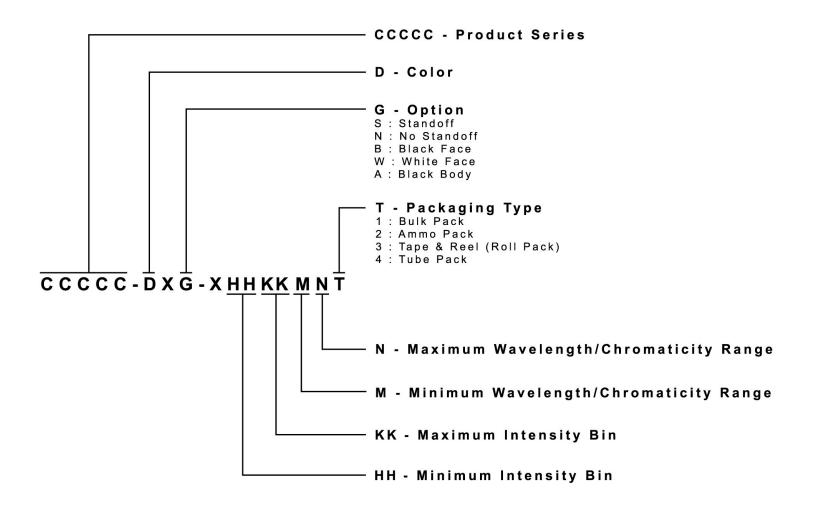




## REFLOW SOLDERING

The LED soldering specification is shown below(suitable for both leaded solder & lead-free solder):

Manual Soldering		Solder Dipping		
Soldering iron	35 W max	Preheat	110 °C max	
Temperature	300 °C max	Preheat time	60 seconds max	
		Solder-bath temperature	260 °C Max	
Soldering time	3 seconds max	Dipping time	5 seconds max	
Position	Not less than 3 mm from the base of the package.	Position	Not less than 3 mm from the base of the package.	

- Manual soldering onto the PCB is not recommended because soldering time is uncontrollable.
- The recommended wave soldering is as below:

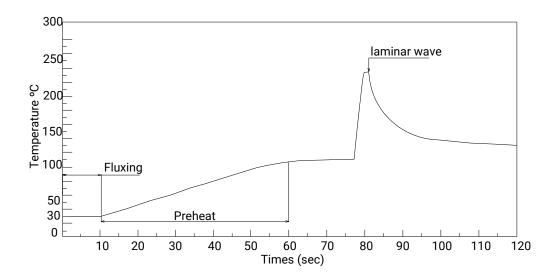

- Do not apply any stress to the LED package, particularly when heated.
- Only bottom preheat is suggested & should not preheat on top in order to reduce thermal stress experienced by the LEDs.
- The LEDs must not be re used once they have been extracted from PCB.
- After soldering the LEDs, the package should be protected from mechanical shock or vibration until the LEDs have reached 40 °C or below.
- Precautions must be taken as mechanical stress on the LEDs may be caused by PCB warpage or from the clinching and cutting of the LED leads.
- When it is necessary to clam the LEDs during soldering, it is important to ensure no mechanical stress is exerted on the LEDs.
- Cut the LED lead at normal room temperature. Lead cutting at high temperature may cause failure of the LEDs.

Refer to "http://www.cree.com/led-components/media/documents/sh-HB.pdf" for soldering & handling details.



## **PACKAGING**

## **Features:**

- The LEDs are packed in cardboard boxes after packaging in normal or anti-electrostatic bags.
- Cardboard boxes will be used to protect the LEDs from mechanical shock during transportation.
- The boxes are not water-resistant, and they must be kept away from water and moisture.
- The Tube Pack type of packaging.
- Max 60 pcs per tube.

