Pro**Labs**

CWDM-SFP-47D-HD1-80-C

Cisco[®] CWDM-SFP-47D-HD1-80 Compatible TAA Compliant 1000Base-CWDM SFP Transceiver (SMF, 1470nm HTx/LRx, 80km, LC, DOM)

Features:

- INF-8074 and SFF-8472 Compliance
- Simplex LC Connector
- Single-mode Fiber
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



Applications:

- Gigabit Ethernet over CWDM
- 1x Fibre Channel
- Access, Metro and Enterprise

Product Description

This Cisco[®] CWDM-SFP-47D-HD1-80 compatible SFP transceiver provides 1000Base-CWDM throughput up to 80km over single-mode fiber (SMF) at a bidirectional wavelength of 1470nm HTx/LRx via an LC connector. It is guaranteed to be 100% compatible with the equivalent Cisco[®] transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Rev. 090321

Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units	Conditions
Storage Temperature	T _{stg}	-40	+85	°C	Ambient
Power Supply Voltage	VCC		< +4.0	V	
Ambient Humidity	Нор	5	95	%	w/o dew
Operating Temperature	ТС	0	70	°C	Case, w/airflow

Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

Parameter		Symbol	Min.	Тур.	Max.	Unit	Notes	
Power Supply	Voltage	Vcc	3.135	3.30	3.465	V		
Power Supply	Current	Icc			500	mA	Cooled type	
Power Supply	Noise Rejection	PSNR			100	mVp-p	from 100Hz to 1MHz	
Transmitter				1	1			
Data Rate		DRT	1.0625		1.25	Gb/s		
Differential Inp	out Voltage	VINpp	150		1000	mV		
Differential Inp	out Impedance	ZIN	90	100	110	ohm		
TX_Disable	Input Low	VIL	0		0.8	V	LVTTL,Normal at Low,	
	Input high	VIH	2.0		3.465	V	High is Shutdown(Poff)	
	Assert Time	tOFF			10	us	High	
	Negate Time	tON			1	ms	Low	
Tx Disable to r	Tx Disable to reset		10			us	High	
Time to Initiali reset of Tx_Fau	ze Cooled Including Ilt	tInit_cooled			10	sec	1	
TX_Fault	Output Low	VFOL	0		0.8	V	LVTTL, Low is Normal	
	Output High	VFOH	2.0		Vcc+0.3	V		
Receiver								
Data Rate		DRR	1.0625		1.25	Gb/s		
Differential Output Voltage		Vout	480		1080	mV		
Differential Ou	ifferential Output Impedance		90	100	110	ohm		
Rx_LOS (Loss of Signal)	Output Low	VLOSL	0		0.8	V	LVTTL, Low is normal	
	Output High	VLOSH	2		Vcc+0.3	V		
	Assert time	tlos-on			100	us	Low -> High	
	Deassert time	tLOS-OFF			100	us	High -> Low	

Notes:

1. Cooled version, for wavelength stabilization at worst case (Low & High temperature)

Optical Characteristics


Parameter		Symbol	Min.	Тур.	Max.	Unit	Conditions
Transmitter							
Optical Transmit P	ower	Pf	-2.5		2.0	dBm	
Transmitter Disab	le (Off) Power	Poff			-35	dBm	@Tx_Diable is High
Peak Wavelength		λρ	$\lambda c + 2.0 \sim \lambda c + 6.5$		nm	CWDM, DFB-LD, Note1	
Spectral Width		Δλ			1.0	nm	@-20 dB
Side Mode Suppre	ssion Ratio	SMSR	30			dB	
RIN12OMA	RIN12OMA				-117	dB/Hz	
Dispersion Penalty	Dispersion Penalty				1.5	dB	
Extinction Ratio		ER	8.2			dB	@1.25Gb/s,PRBS 2 ⁷ -1
Eye pattern Mask			IE	EE802.3/200	@1.25Gb/s,PRBS 2 ⁷ -1		
Receiver							
Optical Sensitivity		S			-26.5	dBm	Note 2
Optical Overload		OL	2.0			dBm	Note 2
Operating waveler	ngth	λο	λ	λ_c - 6.5 ~ λ_c - 1.5 nm		Note 1	
Rx_LOS	Assert	Рд	-38.0			dBm	Squelch function enable
(Loss of signal)	De-assert	PD			-26.5	dBm	
	Hysteresis	PA-PD	0.5	2.0	5.0	dB	
Receiver Reflectance					-27	dB	@ λ ₀
RSSI Calibration F		RCAL	Internal Calibrated (The host side can be read by an external way)				

Notes:

- 1. λ_c =1271,1291,1311,1331,1351,1371,1391,1411,1431,1451,1471,1491,1511,1531,1551,1571,1591,1 611nm
- 2. PRBS2⁷-1,BER1x10⁻¹², Source ER=8.2[dB]


Pin Descriptions

Pin	Symbol	Name/Descriptions	Ref.
1	TGND(VeeT)	Ground	1
2	TX_Fault	Status Out	3
3	TX_Disable	Control In	3
4	MOD_DEF(2)	Input/Output(SDA, I ² C data)	3
5	MOD_DEF(1)	Input/Output(SCL, I ² C clock)	3
6	MOD_DEF(0)	Indicates that the module is present, Grounded internally	3
7	Rate Select	Rate Select In(NC)	3
8	RX_LOS	Status Out	3
9	RGND(VeeR)	Ground	3
10	RGND(VeeR)	Ground	1
11	RGND(VeeR)	Ground	1
12	Rx_Data bar	Data Out Negative	3
13	Rx_Data	Data Out Positive	3
14	RGND(VeeR)	Ground	1
15	Rx_Vcc(VccR)	Power.	2
16	Tx_Vcc(VccR)	Power	2
17	TGND(VeeT)	Ground	1
18	Tx_Data	Data In Positive	3
19	Tx_Data bar	Data In Negative	3
20	TGND(VeeT)	Ground	1

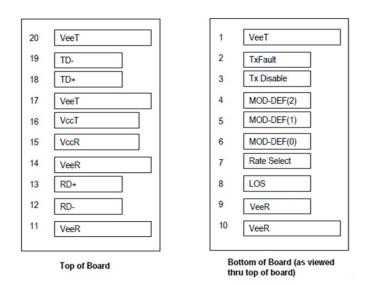


Pin-out of connector Block on Host board

Recommended Circuit Schematic

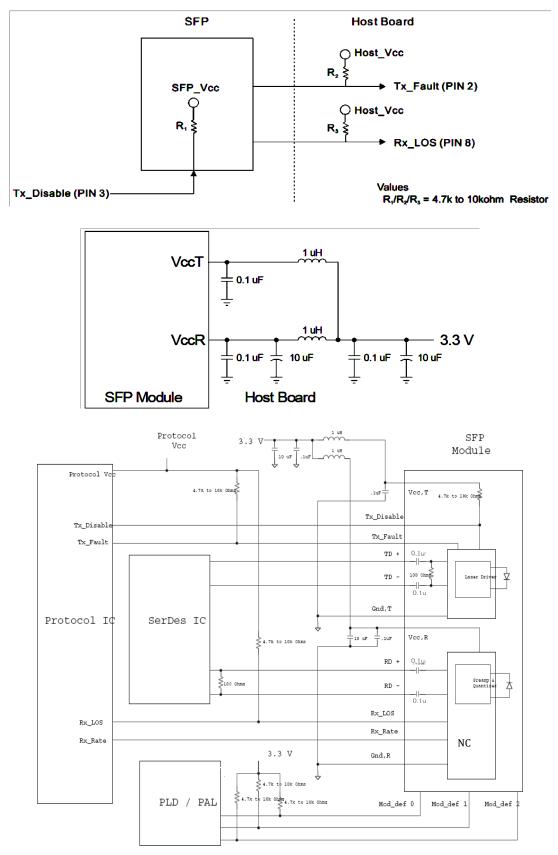


Mechanical Specifications

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

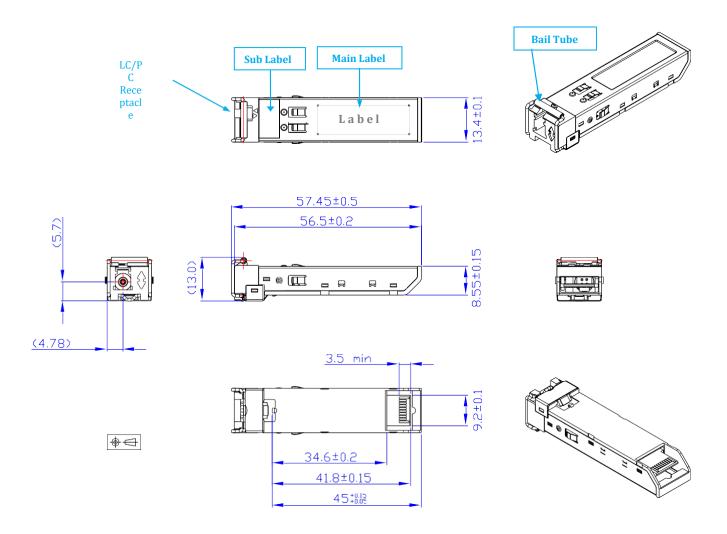


EEPROM Information

EEPROM memory map specific data field description is as below:

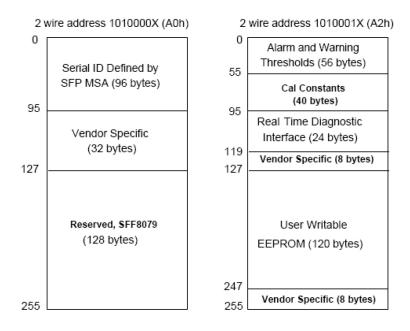

2-Wire Data Transfer Protocol

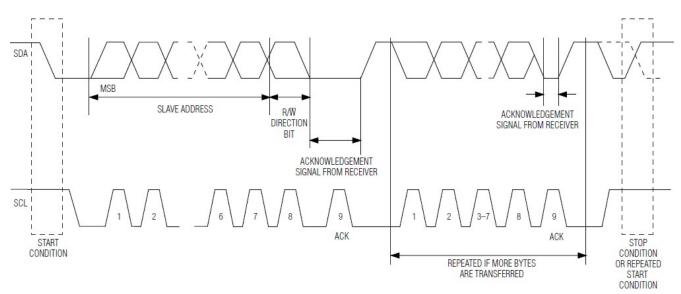

About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.

Contact Information ProLabs US Email: sales@prolabs.com Telephone: 952-852-0252

ProLabs UK

Email: salessupport@prolabs.com Telephone: +44 1285 719 600