

www.lemo.com

SJG.2B.308.CLAP

SUMMARY

Wires

Low voltage 8



Image is for illustrative purpose only

Series 2B

Termination type Coupler/adapter/bridge

 IP rating
 68 when mated

 AWG wire size
 30.00 - 22.00

 Cable Ø
 0.00 - 0.00 mm

Status active

Matching parts <u>FGG.2B.308.CLAD72</u>

FGJ.2B.308.CLLD62

Download

Request a quote

Eplan Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model SJG*: Fixed coupler, nut fixing, keys (G, A, B, J, K, L) at the flange end and keys (G, A, B, J, K, L) at the other and watertick are required to the state of the state

K, L) at the other end, watertight or vacuum-tight

Keying Front side: 2 keys (alpha=37.5, male); Other side: 1 key (alpha=0, female)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Variant P: Watertight unmated

Weight 39.90 g

Performance

Configuration 2B.308: 8 Low Voltage

Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 10 Amps

Specifications

Contact Type: Solder

Contact Dia.: 0.9 mm (0.04in)

Vtest (contact-shell): 1250 V (AC), 1770 V (DC) Vtest (contact-contact): 1500 V (AC), 2120 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

Endurance (Shell): 5000


Temp (min / max): -20°C / +80°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 20/80/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

Pressure: 40 bars

DRAWINGS

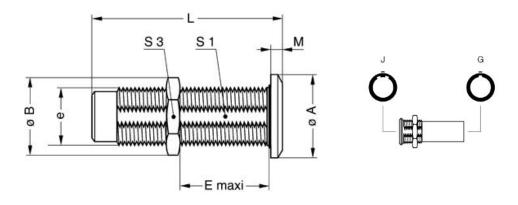

Dimensions

	А	В	E	L	М	S 1	S 3	e
mm.	20	21.8	25	44	4	15	19	M16x1.0
in.	0,79	0,86	0,98	1,73	0,16	0,59	0,75	

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

