

Harvatek Surface Mount Chip LEDs Data Sheet B0221URO-02D000154U1930 (Preliminary)

Official Product	HT Part No. B0221URO-02D000154U1930			
Tentative Product	********	******		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 1/14



DISCLAIMER	3
LIFE SUPPORT POLICY	3
PRODUCT SPECIFICATIONS	4
ATTENTION: ELECTROSTATIC DISCHARGE (ESD) PROTECTION	4
LABEL SPECIFICATIONS	5
SPECIFICATIONS RANGE	6
PRODUCT FEATURES	7
ELECTRO-OPTICAL CHARACTERISTICS	7
PACKAGE OUTLINE DIMENSION AND RECOMMENDED SOLDERING PATTERN FOR REFLOW	
Soldering	7
ABSOLUTE MAXIMUM RATINGS	7
CHARACTERISTICS OF B0221URO	8
PRECAUTION FOR USE	9
PACKAGING	10
TAPE DIMENSION	10
REEL DIMENSION	11
Packing	11
DRY PACK	12
Baking	12
PRECAUTIONS	12
REFLOW SOLDERING	13
Reworking	13
CLEANING	
Cautions of Pick and Place	14
Revise History	14

Official Product	HT Part No. B0221URO-02D000154U1930			
Tentative Product	********	******		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 2/14



DISCLAIMER

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others

Life Support Policy

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Official Product	HT Part No. B0221URO-02D000154U1930			
Tentative Product	********	******		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 3/14



Product Specifications

Item	Specification	Material	Quantity
Luminous	4.5-28.5 mcd		
Intensity(Iv)	@2 mA/ $T_S = 25^{\circ}C$; Tolerance: $\pm 10\%$		
Chromaticity	620-640 nm		
Coordinate	@2 mA/ $T_S = 25^{\circ}C$; Tolerance: ± 0.5 nm		
Vf	1.6-2.4 V		
	@2 mA/ $T_S = 25^{\circ}C$; Tolerance: $\pm 0.05V$		
Ir	< 10 μA @ V _R = 5 V		
Resin	Diffusion	Ероху	
Carrier tape	EIA 481-1A specs	Conductive black tape	
Reel	EIA 481-1A specs	Conductive black	
Label	HT standard	Paper	
Packing bag	250x230mm	Aluminum laminated bag/ no-zipper	One reel per bag
Carton	HT standard	Paper	Non-specified
	•		•

Others:

Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin combinations of Iv, CIE and Vf. Each reel has a label identifying its specification; the immediate box consists of a product label as well.

Note: This is shipped test conditions

*Remarks: This product should be operated in forward bias. If a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.

ATTENTION: Electrostatic Discharge (ESD) protection



The symbol to the left denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlGaInP, GaN, or/and InGaN based chips are **STATIC SENSITIVE devices**. ESD precaution must


be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

Official Product	HT Part No. B0221URO-02D000154U1930			
Tentative Product	********	******		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 4/14



Label Specifications

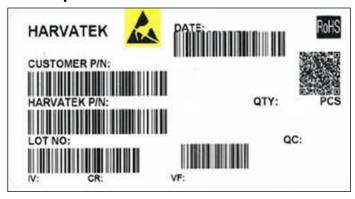

Harvatek P/N:

B 022 1 URO- 02D- 0001 54

Product	Package	Dice Q'ty	Color	Current	Series Number	Taping
PCB	0.65(L)x0.38(W)x0.36(H) mm	1:Single	URO: Ultra Bright	2mA	X001~XZZZ	1.Taping style
			Super Red			2. Q'ty

Lot No. :

1	2	3	4	5	6	7	8	9	10
E	1	Α	1	Α	2	2	L	1	2
Cod	e 1 2	Code 3	Code 4	Code 5	Code 6	Code 7	Code 8	Code 9	Code 10
		Mfg. Year	Mfg. Month	Mfg. Date	Consecuti	ve number		Special code	е
Internal Tra	acing Code	2020-L 2021-M 2022-P 2023-Q 2026-T 2027-V 2030-Y 2031-Z	1:Jan. 2:Feb. A:Oct. B:Nov. C:Dec.	1:A 2:B 3:C 26:Z 27:7 28:8 29:9 30:3 31:4	01-	-ZZ		000~ZZZ	

Official Product	HT Part No. B0221URO-02D000154U1930			
Tentative Product	********	******		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 5/14



Specifications Range

■Luminous Intensity (Iv) Bin:

Color	Bin Code	Spec. Range
	J	4.50-7.15 mcd
UDO	К	7.15-11.25 mcd
URO	L	11.25-18.00 mcd
	М	18.00-28.50 mcd

Note: It maintains a tolerance of ±10% on Luminous Intensity

■Wavelength Bin:

Color	Bin Code	Spec. Range
URO	BF	620.0-640.0 nm

Note: It maintains a tolerance of ±0.5nm on Wavelength Bin

■Forward Voltage (Vf) Bin:

Color	Bin Code	Spec. Range
URO	E18	1.6-2.4 V

Note: It maintains a tolerance of ±0.05V on forward voltage measurements

Official Product	HT Part No. B0221URO-02D000154U1930				
Tentative Product	********	******			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 6/14	



Product Features


Electro-Optical Characteristics

(T_{Soldering}, 25°C)

(* 0000					boldering, = C /				
Carica	Emitting Color	Material	V_{F}	(V)	Wa	velength λ(nm)	I _V (mcd)	Viewing
Series	Emitting Color	Emitting Color Material	typ	max	λ_{D}	λ_{P}	Δλ	Typical	Angle $2\theta \frac{1}{2}$
B0221URO-02	URO	AlGaInP	2.0	2.4	631	639	20	11.25	110

Package Outline Dimension and Recommended Soldering Pattern for Reflow Soldering

(Unit: mm Tolerance: +/-0.1)

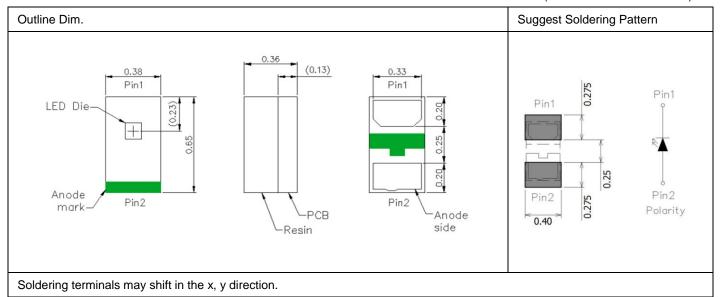

Absolute Maximum Ratings

(T_{Soldering} 25°C)


Series	P _D (mW)	I _F (mA)	I _{FP} (mA)*	T _{OP} (℃)	T _{ST} (°C)
Color	Power	Forward	Pulse Forward	Operating	Storage
Color	Dissipation	Current	Current	Temperature	Temperature
URO	4.8	2	20	-40~+85	-40~+100

^{*} Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width

Official Product	HT Part No. B0221URO-02D000154U1930					
Tentative Product	********	******				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 7/14		



Characteristics of B0221URO

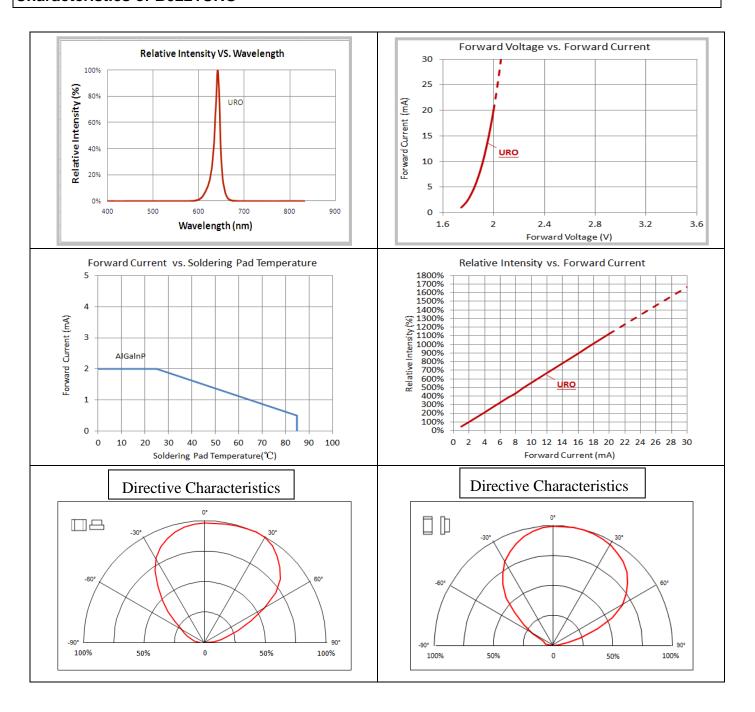

Official Product	HT Part No. B0221URO-02D000154U1930				
Tentative Product	********				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 8/14	




Precaution for Use

- 1. The chips should not be used directly in any type of fluid such as water, oil, organic solvent, etc.
- 2. When the LEDs are illuminating, the maximum ambient temperature should be first considered before operation.
- 3. LEDs must be stored in a clean environment. A sealed container with a nitrogen atmosphere is necessary if the storage period is over 3 months after shipping.
- 4. The LEDs must be used within 4 weeks after unpacked. Unused products must be repacked in an anti-electrostatic package, folded to close any opening and then stored in a dry and cool space.
- 5. The appearance and specifications of the products may be modified for improvement without further notice.
- 6. The LEDs are sensitive to the static electricity and surge. It is strongly recommended to use a grounded wrist band and anti-electrostatic glove when handling the LEDs.If a voltage over the absolute maximum rating is applied to LEDs, it will damage LEDs.Damaged LEDs will show some abnormal characteristics such as remarkable increase of leak current, lower turn-on voltage and getting unlit at low current.

Official Product	HT Part No. B0221URO-02D000154U1930				
Tentative Product	*******				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 9/14	




Packaging Tape Dimension

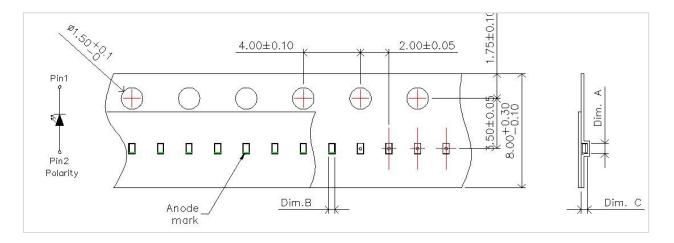

Dim. A	Dim. B	Dim. C	Q'ty/Reel
0.74±0.03	0.47±0.03	0.41±0.03	4K


Unit: mm

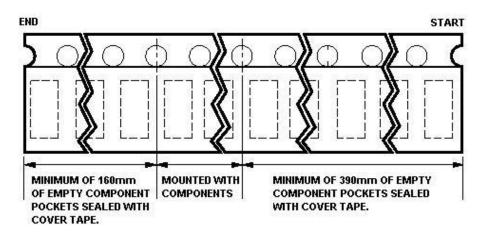


Official Product	HT Part No. B0221URO-02D000154U1930			
Tentative Product	********	******		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 10/14



Reel Dimension

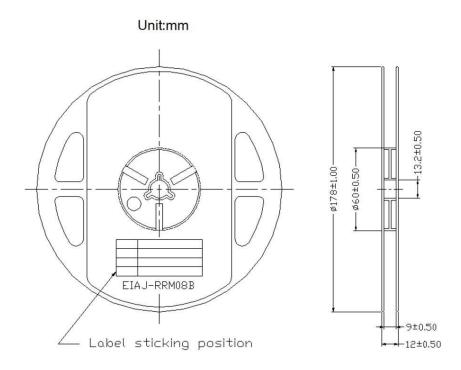

Packing

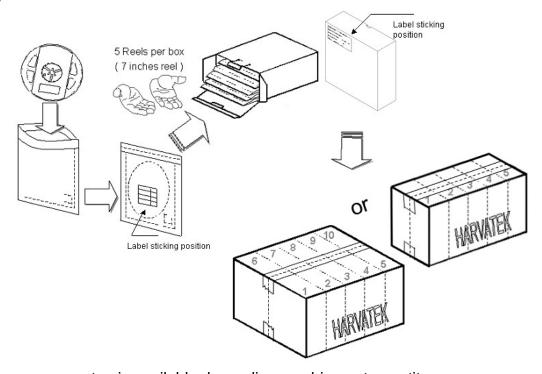

5 or 10 boxes per carton is available depending on shipment quantity.

Official Product	HT Part No. B0221URO-02D000154U1930					
Tentative Product	********	******				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 11/14		




Dry Pack

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

A humidity indicator will be included in the moisture protected anti-static bag prior to shipment.

The packaging sequence is as follows:

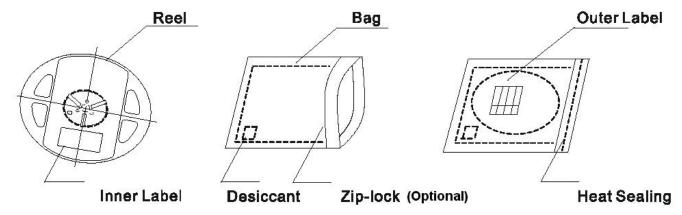

Baking

Baking before soldering is recommended when the package has been unsealed for 4 weeks. The conditions are as followings:

- 1. $60\pm3^{\circ}$ C ×(12~24hrs)and<5%RH, taped reel type.
- 2. $100\pm3^{\circ}$ C ×(45min~1hr), bulk type.
- 3. $130\pm3^{\circ}$ C×(15min~30min), bulk type.

Precautions

- 1. Avoid exposure to moisture at all times during transportation or storage.
- 2. Anti-Static precaution must be taken when handling GaN, InGaN, and AlGaInP products.
- 3. It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage beyond the specified limit.
- 4. Avoid operation beyond the limits as specified by the absolute maximum ratings.
- 5. Avoid direct contact with the surface through which the LED emits light.
- 6. If possible, assemble the unit in a clean room or dust-free environment.

Official Product	HT Part No. B0221URO-02D000154U1930				
Tentative Product	********				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 12/14	




Reflow Soldering

Recommend soldering paste specifications:

- 1. Operating temp.: Above 217°C ,60~150 sec.
- 2. Peak temp.:260°C Max.,10sec Max.
- 3. Reflow soldering should not be done more than two times.
- Never attempt next process until the component is cooled down to room temperature after reflow.
- 5. The recommended reflow soldering profile (measured on the surface of the LED terminal) is as following:

Lead-free Solder Profile

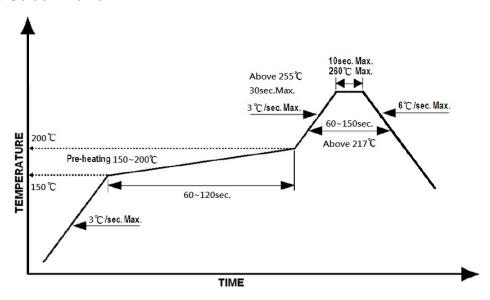

Reworking

- Rework should be completed within 5 seconds under 260°C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50°C x 30sec. or <30°C x 3min
- Ultrasonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100 °C max, <3min

Official Product	HT Part No. B0221URO-02D000154U1930					
Tentative Product	********	*******				
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 13/14		



Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electric-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

Revise History

Rev.	Descriptions	Date	Page
-		05/10/2022	-

Official Product	HT Part No. B0221URO-02D000154U1930			
Tentative Product	********	******		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		05/10/2022	Preliminary	Page 14/14