


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

PART NO.		RFB-1130-5		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	9/13/00	JDMc

ALL DIMENSIONS ARE REFERENCE ONLY

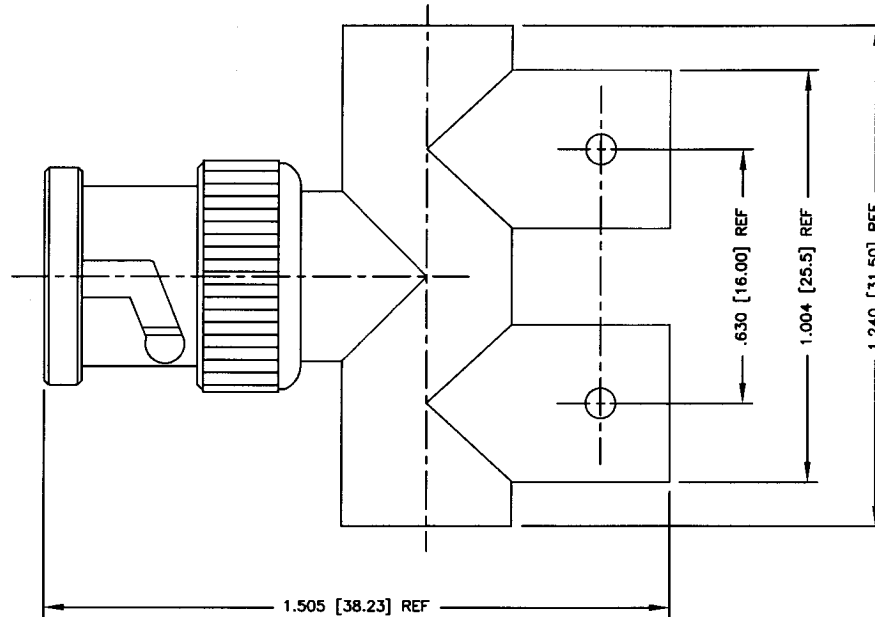

SPECIFICATIONS:

IMPEDANCE: 50 Ohms NOMINAL
 FREQUENCY RANGE: 0-1 GHz
 WORKING VOLTAGE: 500 V RMS @ SEA LEVEL
 INTERFACE PER MIL-STD-348

1	BODY	1	ZINC DIE	NICKEL, 100 MICRO
2	SHELL	1	ZINC DIE	NICKEL, 100 MICRO
3	CONTACT	1	COPPER	NICKEL, 100 MICRO
4	PIN	1	BRASS	GOLD, 3 MICRO
5	CONTACT	1	COPPER	GOLD, 3 MICRO
6	RETAINING RING	1	COPPER	NICKEL, 100 MICRO
7	INSULATOR	1	DELTRIN	----
8	SPRING WASHER	1	Be. Cu	----
9	GASKET	1	RUBBER	----
10	SPACER	1	PTFE	----
11				
12				
13				
14				
#	DESCRIPTION	QTY	MATRL	FINISH

000360	
DRAWN	JDM 9/13/00
CHECKED	<i>[Signature]</i> 9-13-00
ORJ DRAWN	C. ZUNIGA 9/13/00
APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:
 1. REMOVE ALL BURRS
 2. BREAK ALL CORNERS & EDGES .005 R. MAX.
 3. CHAMFER 1ST & LAST THREADS 45°
 4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
 6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DECIMALS .XXX±.003 [.08] .XX±.005 [.13]
 DIAMETER .XXX±.001 [.03] .XX±.003 [.08]

RF

connectors

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

BNC MALE TO DOUBLE BNC FEMALE
 GOALPOST ADAPTER

SIZE A	CABLE GROUP N/A	DWG NO. RFB-1130-5	REV —
-----------	--------------------	-----------------------	----------

SCALE: NTS CAD FILE OUTLINE SHEET 1 OF 1