
PAGE	1/2	ISSUE	16-04-20	SERIE	: DPDT	PA	ART NUM	BER : F	R57716	3005L
RF CHA	ARACTERIST	<u>ICS</u>								
F	requency rar	ae		:	0 - 12.4 GHz	:				
	mpedance	0		:	50 Ohms					
		1>	DD A	1.0	0.0	0.0	0.40.4	ח		
	requency (Gl /SWR max	HZ)	DC - 1 1.15	1 - 2 1.20	2 - 3 1.25	3 - 8 1.35	8 - 12.4 1.50	-		
	nsertion loss	max	0.15 dB	0.20 dB	0.25 dB	0.35 dB	0.50 dB	1		
ls	solation min		85 dB	80 dB	75 dB	70 dB	60 dB			
А	verage powe	r (*)	700 W	500 W	400 W	250 W	200 W			
Ī			T	Passive inte	rmodulation		1			
T	one 1				oximately 43					
	one 2				oximately 43					
3	order PIM			- 160 dBc a	t 1770 MHz					
D	pepending on	application	n, carrier powe	ers and frequ	encies, PIM ı	measuremen	ts can vary.			
P <u>ELECTI</u> A	PIM testing is RICAL CHAR	not measu	ired during pro	oduct accepta	ance test.	measuremen	ts can vary.			
P <u>ELECTF</u> A N A T Ir	PIM testing is	not measu ACTERIS nt ** ge (Vcc)	ired during pro	oduct accepta : : : : :	ance test.	0V) / NEGA B male con 100 mA	TIVE COMM			
P <u>ELECTF</u> A N A T Ir S	PIM testing is <u>RICAL CHAR</u> Actuator Jominal curre Actuator voltag Terminals indicator rating	not measu ACTERIS nt ** ge (Vcc) g ie	rred during pro	oduct accepta : : : : :	LATCHING 125 mA 28V (24 to 3 9 pins D-SU 1 W / 30 V /	0V) / NEGA B male con 100 mA	TIVE COMM			
P <u>ELECTI</u> A N A T Ir S S <u>MECHA</u>	PIM testing is <u>RICAL CHAR</u> Actuator Jominal curre Actuator voltag Terminals indicator rating Self cut-off tim	not measu ACTERIS nt ** ge (Vcc) g e RACTERIS	rred during pro	oduct accepta : : : : : :	LATCHING 125 mA 28V (24 to 3 9 pins D-SU 1 W / 30 V /	0V) / NEGA B male con 100 mA < 120 ms	TIVE COMM nector			
P ELECTF A N A T Ir S MECHA C L	PIM testing is <u>RICAL CHAR</u> Actuator Jominal curre Jominal curre Actuator voltag Terminals indicator rating Gelf cut-off tim <u>ANICAL CHAI</u> Connectors*** ife	not measu ACTERIS nt ** ge (Vcc) g ee RACTERIS	rred during pro	oduct accepta : : : : : : : : :	LATCHING 125 mA 28V (24 to 3 9 pins D-SU 1 W / 30 V / 40 ms < CT N female pe 2 million cy	0V) / NEGAT IB male com 100 mA < 120 ms	TIVE COMM nector			
P ELECTI A N A T Ir S MECHA C L S	PIM testing is <u>RICAL CHAR</u> Actuator Jominal curre Actuator voltage Terminals Indicator rating Self cut-off tim <u>ANICAL CHAR</u> Connectors*** ife Switching Tim	not measu ACTERIS nt ** ge (Vcc) g ee RACTERIS	rred during pro	oduct accepta : : : : : : : : : : : :	LATCHING 125 mA 28V (24 to 3 9 pins D-SU 1 W / 30 V / 40 ms < CT N female pe 2 million cy < 15 ms	0V) / NEGAT IB male con 100 mA < 120 ms er MIL-C 390 cles	TIVE COMM nector			
P ELECTF A N A T Ir S MECHA C L S C	PIM testing is <u>RICAL CHAR</u> Actuator Jominal curre Jominal curre Actuator voltag Terminals indicator rating Gelf cut-off tim <u>ANICAL CHAI</u> Connectors*** ife	not measu ACTERIS nt ** ge (Vcc) g ee RACTERIS	rred during pro	oduct accepta : : : : : : : : : : : : : : : : : : :	LATCHING 125 mA 28V (24 to 3 9 pins D-SU 1 W / 30 V / 40 ms < CT N female pe 2 million cy	0V) / NEGAT IB male con 100 mA < 120 ms er MIL-C 390 cles	TIVE COMM nector			
P ELECTI A N A T Ir S MECHA C L S C V	PIM testing is <u>RICAL CHAR</u> Actuator Jominal curre Actuator voltag Terminals Indicator rating Self cut-off tim <u>ANICAL CHAI</u> Connectors*** ife Switching Tim Construction	not measu ACTERIS nt ** ge (Vcc) g le RACTERIS	rred during pro	oduct accepta : : : : : : : : : : : : : : : : : : :	LATCHING 125 mA 28V (24 to 3 9 pins D-SU 1 W / 30 V / 40 ms < CT N female pe 2 million cy < 15 ms Splashproo	0V) / NEGAT IB male con 100 mA < 120 ms er MIL-C 390 cles	TIVE COMM nector			
P ELECTI A N A T Ir S MECHA C C S C C S C C	PIM testing is <u>RICAL CHAR</u> Actuator Jominal curre Actuator voltag Terminals indicator rating Self cut-off tim <u>ANICAL CHAI</u> <u>Connectors</u> *** ife Switching Tim Construction Veight	not measu ACTERIS nt ** ge (Vcc) g ee RACTERIS ** e*** CHARACT perature ra	TICS TICS ERISTICS ange	oduct accepta : : : : : : : : : : : : : : : : : : :	LATCHING 125 mA 28V (24 to 3 9 pins D-SU 1 W / 30 V / 40 ms < CT N female pe 2 million cy < 15 ms Splashproo	0V) / NEGAT IB male cont 100 mA < 120 ms or MIL-C 390 cles f	TIVE COMM nector	ION		
P ELECTI A N A T Ir S MECHA C L S C V ENVIRC	PIM testing is <u>RICAL CHAR</u> Actuator Jominal curre Actuator voltage Terminals Indicator rating Self cut-off tim <u>ANICAL CHAI</u> <u>Connectors***</u> ife Switching Tim Construction Veight <u>DNMENTAL C</u> Operating tem Storage tempo	not measu ACTERIS nt ** ge (Vcc) g ee RACTERIS ** e*** CHARACT perature ran	Ired during pro	oduct accepta : : : : : : : : : : : : : : : : : : :	LATCHING 125 mA 28V (24 to 3 9 pins D-SU 1 W / 30 V / 40 ms < CT N female pe 2 million cy < 15 ms Splashproo < 215 g	0V) / NEGAT IB male cont 100 mA < 120 ms or MIL-C 390 cles f	TIVE COMM nector	ION	oHs	
ELECTI A N A T Ir S MECHA C L S C V S C S S X X X X X X X X X X X X X X X X	PIM testing is <u>RICAL CHAR</u> Actuator Jominal curre Actuator voltage Terminals indicator rating Self cut-off time ANICAL CHAI Connectors*** ife Switching Time Construction Veight DNMENTAL C	not measu ACTERIS nt ** ge (Vcc) g ee RACTERIS ** e*** CHARACT perature ran perature ran r at 25°C p	Ired during pro	oduct accepta : : : : : : : : : : : : : : : : : : :	LATCHING 125 mA 28V (24 to 3 9 pins D-SU 1 W / 30 V / 40 ms < CT N female pe 2 million cy < 15 ms Splashproo < 215 g	0V) / NEGAT IB male cont 100 mA < 120 ms or MIL-C 390 cles f	TIVE COMM nector	ION	o H S	

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

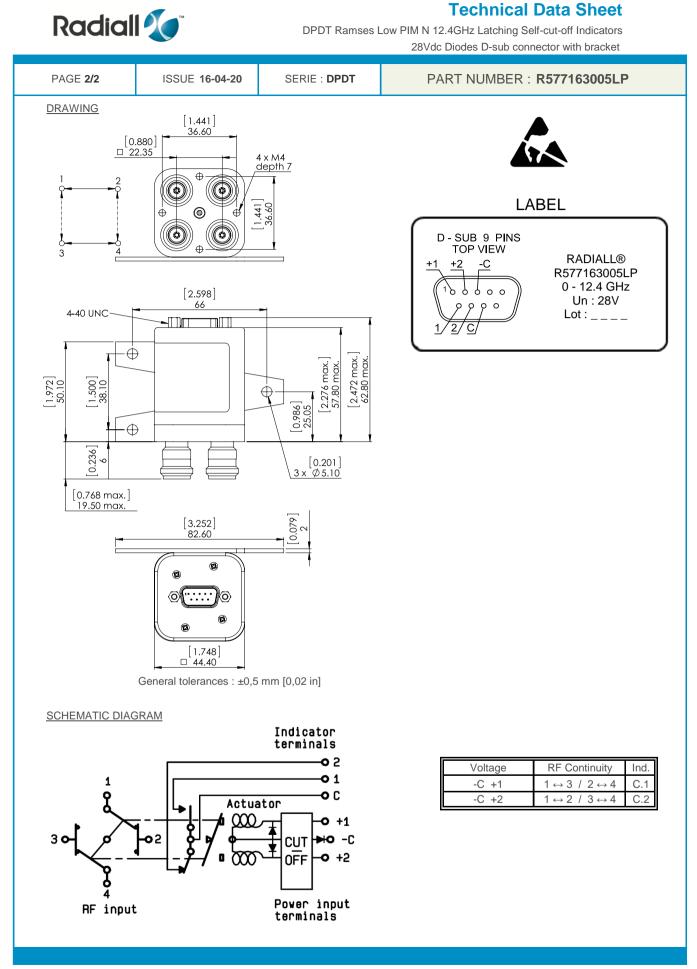

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.