## **SIEMENS**

Data sheet 3RV2121-4EA10



Circuit breaker size S0 for motor protection, CLASS 10 with overload relay function A-release 27...32 A N-release 400 A screw terminal Standard switching capacity

product brand name	SIRIUS	
product designation	Circuit breaker	
design of the product	For motor protection with overload relay function	
product type designation	3RV2	
General technical data		
size of the circuit-breaker	S0	
size of contactor can be combined company-specific	S00, S0	
product extension auxiliary switch	Yes	
power loss [W] for rated value of the current		
<ul> <li>at AC in hot operating state</li> </ul>	13.25 W	
at AC in hot operating state per pole	4.4 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
shock resistance according to IEC 60068-2-27	25g / 11 ms	
mechanical service life (switching cycles)		
<ul> <li>of the main contacts typical</li> </ul>	100 000	
of auxiliary contacts typical	100 000	
electrical endurance (switching cycles) typical	100 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
<ul> <li>during operation</li> </ul>	-20 +60 °C	
during storage	-50 +80 °C	
during transport	-50 +80 °C	
relative humidity during operation	10 95 %	
Main circuit		
number of poles for main current circuit	3	
adjustable current response value current of the current-dependent overload release	27 32 A	
operating voltage		
• rated value	20 690 V	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V	
at AC-3e rated value maximum	690 V	
operating frequency rated value	50 60 Hz	
operational current rated value	32 A	
operational current		
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	32 A	

a at AC 3a at 400 V rated value	32 A
at AC-3e at 400 V rated value	02 A
operating power	
• at AC-3	7.5 140
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	30 kW
• at AC-3e	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	30 kW
operating frequency	
• at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Auxiliary circuit	
design of the auxiliary switch	laterally
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	1.5 A
• at 230 V	1.5 A
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
Protective and monitoring functions	
product function	
<ul> <li>ground fault detection</li> </ul>	No
<ul> <li>phase failure detection</li> </ul>	Yes
trip class	CLASS 10
design of the overload release	thermal
breaking capacity maximum short-circuit current (Icu)	
at AC at 240 V rated value	100 kA
<ul> <li>at AC at 400 V rated value</li> </ul>	55 kA
<ul> <li>at AC at 500 V rated value</li> </ul>	10 kA
<ul> <li>at AC at 690 V rated value</li> </ul>	4 kA
breaking capacity operating short-circuit current (Ics)	
at AC	
<ul> <li>at 240 V rated value</li> </ul>	100 kA
<ul> <li>at 400 V rated value</li> </ul>	25 kA
<ul> <li>at 500 V rated value</li> </ul>	5 kA
at 690 V rated value	2 kA
response value current of instantaneous short-circuit trip	400 A
unit	
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
<ul><li>at 480 V rated value</li></ul>	32 A
at 600 V rated value	32 A
yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	2 hp
— at 230 V rated value	5 hp
<ul> <li>for 3-phase AC motor</li> </ul>	
— at 200/208 V rated value	7.5 hp
— at 220/230 V rated value	10 hp
— at 460/480 V rated value	20 hp
contact rating of auxiliary contacts according to UL	C600 / R300
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic

design of the fuse link	
<ul> <li>design of the fuse link</li> <li>for short-circuit protection of the auxiliary switch</li> </ul>	fuse at /aG: 6.A. quick: 10.A
required	fuse gL/gG: 6 A, quick: 10 A
design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 400 V	gL/gG 63 A
● at 500 V	gL/gG 63 A
● at 690 V	gL/gG 63 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
	according to DIN EN 60715
height	97 mm
width	65 mm
depth	97 mm
required spacing  • for grounded parts at 400 V	
— downwards	30 mm
— upwards	30 mm 9 mm
<ul><li>— at the side</li><li>• for live parts at 400 V</li></ul>	o mill
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
for grounded parts at 500 V	V IIIII
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 500 V	5 Hill
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
for grounded parts at 690 V	<b>5</b> 11111
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
for main contacts	
— solid or stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
at AWG cables for main contacts	2x (16 12), 2x (14 8)
type of connectable conductor cross-sections	
for auxiliary contacts	
<ul><li>— solid or stranded</li></ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
at AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)
tightening torque	

2 2.5 N·m
0.8 1.2 N·m
Diameter 5 to 6 mm
Pozidriv size 2
M4
M3
5 000
50 %
50 %
50 FIT
10 y
IP20
finger-safe, for vertical contact from the front
Handle

(1)

Confirmation





<u>KC</u>



**Declaration of Conformity** 

**General Product Approval** 

**Test Certificates** 

Marine / Shipping





Special Test Certificate

Type Test Certificates/Test Report





Marine / Shipping

other











Confirmation

other

Railway



Confirmation

Vibration and Shock

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2121-4EA10

Cax online generator

 $\underline{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2121-4EA10}$ 


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RV2121-4EA10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2121-4EA10&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RV2121-4EA10/char

Further characteristics (e.g. electrical endurance, switching frequency)
<a href="http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2121-4EA10&objecttype=14&gridview=view1">http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2121-4EA10&objecttype=14&gridview=view1</a>

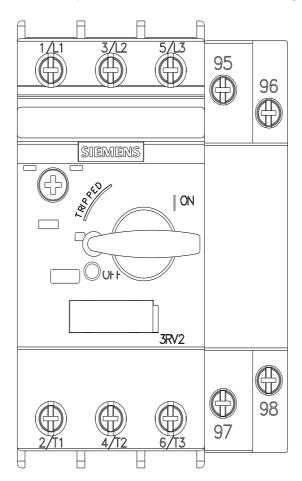

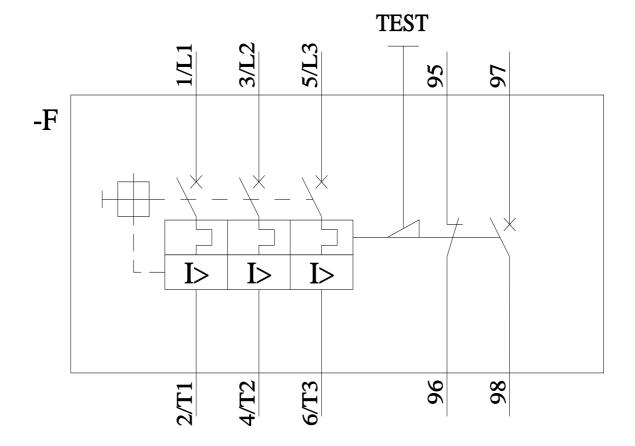

last modified: 6/25/2022 🖸