SIEMENS

Data sheet



Special type Circuit breaker size S0 for motor protection, CLASS 10 Arelease 13...20 A N-release 260 A screw terminal Standard switching capacity Ambient temperature -50 $^{\circ}\text{C}$ 500 switching cycles

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S0
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	10.5 W
at AC in hot operating state per pole	3.5 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (switching cycles)	
 of the main contacts typical 	500
of auxiliary contacts typical	500
electrical endurance (switching cycles) typical	500
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-50 +60 °C
 during storage 	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	13 20 A
operating voltage	
rated value	20 690 V
at AC-3 rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	20 A
operational current	
at AC-3 at 400 V rated value	20 A
operating power	

a at AC 2	
• at AC-3	E E IAM
— at 230 V rated value	5.5 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	11 kW
— at 690 V rated value	15 kW
operating frequency	
at AC-3 maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
 ground fault detection 	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
breaking capacity maximum short-circuit current (Icu)	
 at AC at 240 V rated value 	100 kA
 at AC at 400 V rated value 	55 kA
 at AC at 500 V rated value 	10 kA
at AC at 690 V rated value	4 kA
breaking capacity operating short-circuit current (lcs) at AC	
at 240 V rated value	100 kA
at 400 V rated value	25 kA
at 500 V rated value	5 kA
at 690 V rated value	2 kA
response value current of instantaneous short-circuit trip	260 A
unit	255 //
Short-circuit protection	
Short-circuit protection product function short circuit protection	Yes
	Yes magnetic
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit	
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V	magnetic gG 63 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	gG 63 A gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	magnetic gG 63 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	gG 63 A gG 50 A gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	magnetic gG 63 A gG 50 A gG 50 A any
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	magnetic gG 63 A gG 50 A gG 50 A any
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — at the side	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — at the side • for grounded parts at 500 V	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	magnetic gG 63 A gG 50 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	magnetic gG 63 A gG 50 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm

— upwards	30 mm
— at the side	9 mm
 for grounded parts at 690 V 	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
 for live parts at 690 V 	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
 for main current circuit 	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
 for main contacts 	
— solid or stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)
 finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
tightening torque	
for main contacts with screw-type terminals	2 2.5 N·m
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	Pozidriv size 2
design of the thread of the connection screw	
 for main contacts 	M4
Safety related data	
T1 value for proof test interval or service life according to IEC 61508	10 y

IP20

Certificates/ approvals

60529

General Product Approval

display version for switching status

Declaration of Conformity

finger-safe, for vertical contact from the front

Test Certificates

Confirmation

<u>KC</u>

protection class IP on the front according to IEC

touch protection on the front according to IEC 60529







Special Test Certificate

Test Certificates

Marine / Shipping

Type Test Certificates/Test Report











Marine / Shipping

other

Railway





Confirmation



Vibration and Shock

Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-4BA10-0BA0

Cax online generator

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4BA10-0BA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-4BA10-0BA0&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4BA10-0BA0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-4BA10-0BA0&objecttype=14&gridview=view1

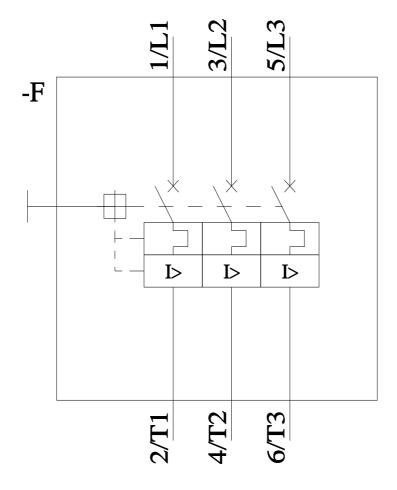

last modified: 6/25/2022 🖸