

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Sensor/actuator box, application: Standard, connection method: M12-SPEEDCON-socket Plastic, number of slots: 8, number of positions: 4, coding: A - standard, slot assignment: single, status display: yes, pnp; master cable connection: Pluggable screw connection 180°, shielding: no

### Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Flexible, distributed bundling of signals in one master cable
- ☑ Convenient: increased machine availability thanks to quick and easy diagnostics
- Flexible: distributor box with connector hood for on-site assembly



## **Key Commercial Data**

Packing unit	1 pc
GTIN	4 046356 553704
GTIN	4046356553704

### Technical data

#### General

Rated voltage	24 V DC	
Max. operating voltage U <sub>max</sub>	30 V DC	
Current carrying capacity per I/O signal	2 A	
Current carrying capacity per slot	4 A	
Total rated current	10 A	
Number of positions	4	
Number of slots	8	
Flammability rating according to UL 94	V0	
Sensor/actuator connection system	M12-SPEEDCON-socket	
Note	For details about the PCB connectors used, refer to the technical data for MC 1,5/10-STF-3,5 (1847204)	



## Technical data

### General

NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".

#### Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C 80 °C

### Local diagnostics function

Local diagnostics	Supply voltage Green LED
	Status display I/O Yellow LED

### Master cable data/connection data

Connection method	Pluggable screw connection
Conductor cross section min. (signal)	0.14 mm²
Conductor cross section max. (signal)	1.5 mm²
Conductor cross section AWG min. (signal)	26
Conductor cross section AWG max. (signal)	16
Stripping length (signal)	7 mm
Conductor cross section min. (energy)	0.14 mm²
Conductor cross section max. (energy)	1.5 mm²
Conductor cross section AWG min. (energy)	26
Conductor cross section AWG max. (energy)	16
Stripping length (power)	7 mm
External cable diameter min.	7 mm
External cable diameter max.	12 mm
Stripping length	50 mm (Master cable)
Tightening torque, cover screw	1 Nm
Tightening torque, union nut	2.5 Nm
Tightening torque slot sensor/actuator cable	0.4 Nm
Tightening torque of mounting screw for fixing the housing	0.5 Nm

### Insulation material

Housing material	РВТ
Material of the moulding mass	PUR
Contact material	Cu alloy
Contact surface material	gold-plated
Contact carrier material	PA
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	Sn



## Technical data

### Insulation material

Material of the contact carrier on the master cable side	PA
Material of threaded sleeve	РВТ
O-ring material	NBR
Sealing material	NBR (Connector hood)

### Standards and Regulations

Standard designation	M12 connector
Standards/regulations	IEC 61076-2-101
Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

### **Environmental Product Compliance**

REACh SVHC	Lead 7439-92-1	
China RoHS	Environmentally Friendly Use Period = 50	
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"	

## **Approvals**

### Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals


### Approval details

UL Recognized	http://database.ul.co	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	
Nominal voltage UN		24 V	

cUL Recognized	<b>.7</b>	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FII		FILE E 118976
Nominal voltage UN			24 V	



## Approvals

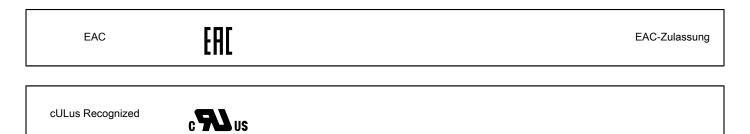

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com