



www.lemo.com

## SUMMARY

# Wires

Triax 1



Image is for illustrative purpose only

0S **Series** 

Female solder Termination type

IP rating 50

AWG wire size 0.00 - 0.00Cable Ø 0.00 - 0.00 mm

Status active

Matching parts FFA.0S.650.CLAC17

#### **Download**

Request a quote

Catalog

### **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model ERA\*: Fixed receptacle, nut fixing

Keying Circular, female

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] **Housing Material** 

brass latch sleeve and mid pieces

Weight 4.67 g

#### **Performance**

Configuration 0S.650: 1 Triax (50 Ohm)

Insulator T: PTFE **Rated Current** 6 Amps

### **Specifications**

Contact Type: Triaxial 50 Ohm (Solder)

Contact Dia.: 0.9 mm (0.035"in) Vtest: 1200 V (AC), 1700 V (DC)

Impedance: 50 Ohm VSWR: 1.03 + 0.34 \* f/GHz Cable type: RGT 178, RGT 174

#### **Others**


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

## **DRAWINGS**

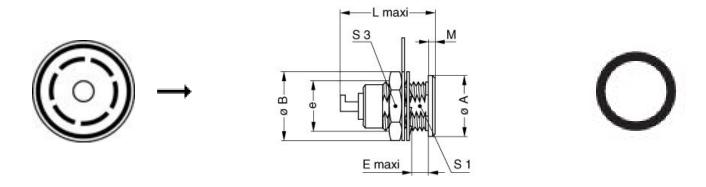

#### **Dimensions**

	A	В	Е	L	М	<b>S</b> 1	<b>S</b> 3	e
mm.	10	12.5	7	18.5	1.2	8.2	11	M9x0.6
in.	0,39	0,49	0,28	0,73	0,05	0,32	0,43	

# **RECOMMENDED BY LEMO**

#### **Tools**

#### **Cables**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

