

www.lemo.com

# FGG.5B.302.CLAD17

## SUMMARY

#### # Wires

2 Low voltage



Image is for illustrative purpose only

5B Series

Male solder Termination type

IP rating 50

AWG wire size 16.00 - 8.00 Cable Ø

**Status** active

Matching parts EGG.5B.302.CLL

### **Download**

Request a quote

Eplan Catalog

See video assembly instructions

## **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model FG\*: Straight plug, cable collet

15.60 - 17.50 mm

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] **Housing Material** 

brass latch sleeve and mid pieces

Weight 306.67 g

#### **Performance**

Configuration 5B.302 : 2 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

**Rated Current** 50 Amps

### **Specifications**

Contact Type: Solder

Contact Dia.: 6 mm (0.236in) Bucket Dia.: 5.2 mm (0.205in)

Max. Solid Conductor: 10 mm<sup>2</sup> (AWG 8) Max. Stranded Conductor: 10 mm<sup>2</sup> (AWG 8)

R (max): 1.2 mOhm

Vtest (contact-shell): 2950 V (AC), 4170 V (DC) Vtest (contact-contact): 3600 V (AC), 5000 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

### **Others**


Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

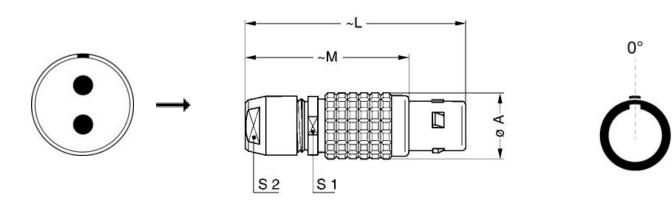

#### **Dimensions**

	А	L	M	<b>S</b> 1	S2
mm.	35	103	78	31	30
in.	1,38	4,06	3,07	1,22	1,18

# **RECOMMENDED BY LEMO**

## Tools

Caps: BFG.5B.100.NAS

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Cables	