

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Bus system connector, CANopen<sup>®</sup>, DeviceNet<sup>™</sup>, 5-position, shielded, Plug straight M12, A-coded, Push-in connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm

#### Your advantages

- Reliable and quick connection of electric cables
- Flexible signal and data cabling
- Quick and easy installation, thanks to Push-in connection technology



#### **Key Commercial Data**

Packing unit	1 pc
GTIN	4 055626 375977
GTIN	4055626375977

### Technical data

#### **Dimensions**

Diameter housing	19 mm
Length	50 mm
External cable diameter	4 mm 8 mm
Stripping length of the sheath	29 mm
Stripping length of the individual wire	7 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C 85 °C (Plug / socket)
Degree of protection	IP65/IP67

#### General



## Technical data

### General

Note	NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
Rated current at 40°C	4 A (2 A when using 0.14 mm² conductors)
Rated voltage	48 V AC
	60 V DC
Number of positions	5
Insulation resistance	≥ 100 MΩ
Coding	A - standard
Standards/regulations	M12 connector IEC 61076-2-101
	Shock, vibration EN 50155:2001
Signal type/category	CANopen <sup>®</sup>
	DeviceNet™
Status display	No
Overvoltage category	II II
Degree of pollution	3
Connection method	Push-in connection
Conductor cross section	0.14 mm² 0.75 mm² (without ferrule)
	0.08 mm² 0.5 mm² (with ferrule)
	0.14 mm² 0.75 mm² (solid)
Conductor cross section AWG	26 18 (without ferrule)
	28 20 (with ferrule)
Insertion/withdrawal cycles	≥ 100
Torque	0.4 Nm (M12 knurl)
	0.8 Nm (Connector with coupling sleeve)
	3 Nm (Pressure nut with coupling sleeve)
Assembly instructions	The wires can be connected both with ferrules and without ferrules

### Material

Flammability rating according to UL 94	V0
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 6.6
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR
Additional material specifications	TPE-U (Clamping cage, weight: 1.1 g)
	PA 6 (Actuation lever)
Standards/regulations	PA 6.6: Fire protection in rail vehicles - requirement sets R22, R23, R24, R25, and R26 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
	PA 6: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)



## Technical data

### Standards and Regulations

Standard designation	M12 connector
Standards/regulations	IEC 61076-2-101
Standard designation	Shock, vibration
Standards/regulations	EN 50155:2001
Flammability rating according to UL 94	V0


## **Environmental Product Compliance**

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings





Functional drawing

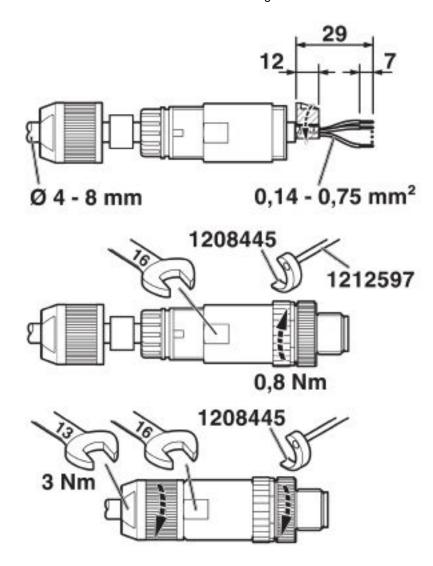

Slide the pressure nut and sleeve housing along the cable, strip the cable, shorten the shield, strip the single wires, connect the wires, in the case of a straight sleeve housing gently twist the wires together, stick the shielding foil around the shortened shield, in the case of a cable outside diameter < 6 mm stick an additional shielding foil around the wire pack, screw the sleeve housing to the plug insert, screw the pressure nut tight.





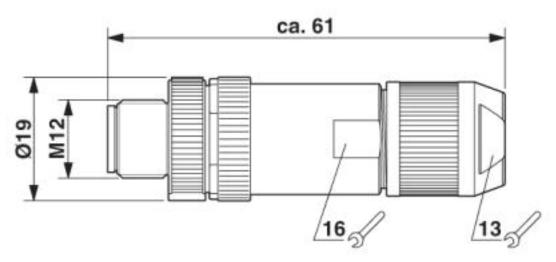

M12 SPEEDCON plug, straight, shielded



4 5 0 2

Schematic diagram

Pin assignment M12 male connector, 5-pos., A-coded, male side

## Approvals

Approvals

Approvals

EAC / UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details



## Approvals

EAC	RU C- DE.Al30.B.01102
-----	--------------------------

UL Listed	UL LISTED	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E221474		E221474
Nominal voltage UN			60 V	
Nominal current IN			4 A	
mm²/AWG/kcmil			26-18	

cUL Listed	CUL	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E221474		E221474
Nominal voltage UN			60 V	
Nominal current IN			4 A	
mm²/AWG/kcmil			26-18	

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com