

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Sensor/actuator socket, straight, 5-pos., M12, A-coded, screw connection, metal knurl, cable gland Pg7  $\mathsf{SKINTOP}$ 

#### Your advantages

- ${\ensuremath{\,^{\scriptstyle\blacksquare}}}$  Safe use in the field, thanks to a high degree of protection
- Flexible: connectors for on-site assembly
- Screw connection: proven connection technology for a large selection of different conductors



### Key Commercial Data

Packing unit	1 pc
GTIN	4 046356 299893
GTIN	4046356299893

### Technical data

#### Dimensions

Diameter housing	20.2 mm
Length	70 mm
External cable diameter	4 mm 6 mm
Stripping length of the sheath	20 mm
Stripping length of the individual wire	5 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C 80 °C (Plug / socket)
Degree of protection	IP67

#### General

Note	NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
------	---



## Technical data

#### General

Rated current at 40°C	4 A
Rated voltage	48 V AC
	60 V DC
Number of positions	5
Color handle area	black
Insulation resistance	≥ 100 MΩ
Coding	A - standard
Standards/regulations	M12 connector IEC 61076-2-101
Signal type/category	Universal
Status display	No
Overvoltage category	1
Degree of pollution	3
Connection method	Screw connection
Conductor cross section	0.25 mm <sup>2</sup> 0.75 mm <sup>2</sup> (without ferrule)
	0.14 mm <sup>2</sup> 0.75 mm <sup>2</sup> (with ferrule)
	0.25 mm <sup>2</sup> 0.75 mm <sup>2</sup> (solid)
Conductor cross section AWG	24 18 (without ferrule)
	26 20 (with ferrule)
Insertion/withdrawal cycles	≥ 100
Torque	0.4 Nm (M12 knurl)
	0.2 Nm (Screw terminal blocks)
	0.8 Nm 1 Nm (Pressure screw)
Tightening torque	Screw plug insert with sleeve housing as far it will go
Assembly instructions	The wires can be connected both with ferrules and without ferrules

#### Material

Flammability rating according to UL 94	НВ
Contact material	CuZn
Contact surface material	CuSnZn
Contact carrier material	РА
Material of grip body	РВТ
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR

### Standards and Regulations

Standard designation	M12 connector	
Standards/regulations	IEC 61076-2-101	
Flammability rating according to UL 94	НВ	

### **Environmental Product Compliance**

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50




### Technical data

**Environmental Product Compliance** 

For details about hazardous substances go to tab "Downlow Category "Manufacturer's declaration"	ads",
--	-------

## Drawings

Dimensional drawing

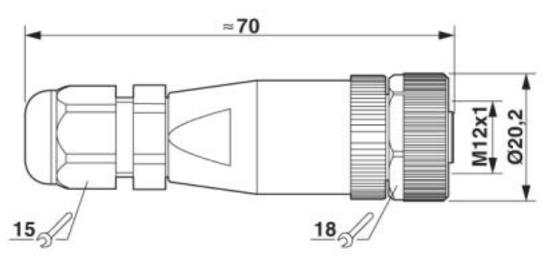

M12 x 1 socket, straight




2004

Schematic diagram

Cable connection side M12 (screw connection)



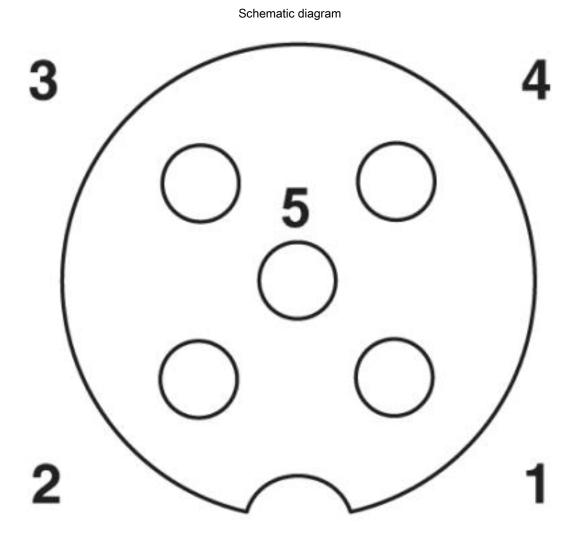

Pin assignment M12 socket, 5-pos., A-coded, socket side view

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approval details

09/12/2019 Page 5 / 6



### Approvals

EAC	EAC	RU C- DE.AI30.B.01102
EAC	EAC	EAC-Zulassung

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200 http://www.phoenixcontact.com