



Dustproof:  
 Protection class IP 54 To IEC 529 (DIN EN 60529)  
 All plug-terminals  
 Terminals shape similar to ISO 8092-1  
 Coil Terminals 1 and 2: 6.3 x 0.8 mm  
 Load Terminals 3, 4 and 5: 6.3 x 0.8 mm  
 Integrated components: Diode

Circuit Diagram

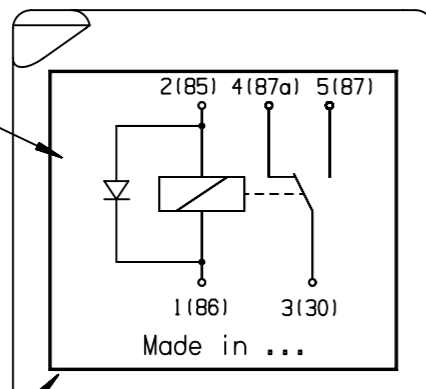


Country of Origin

1,4 max.

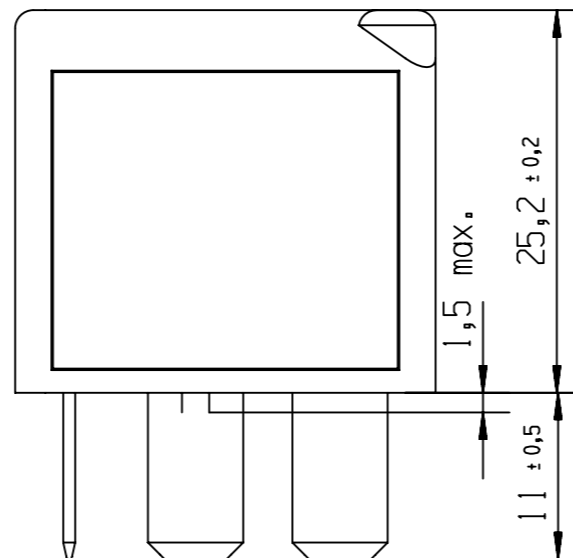

TE Logo

TE PN

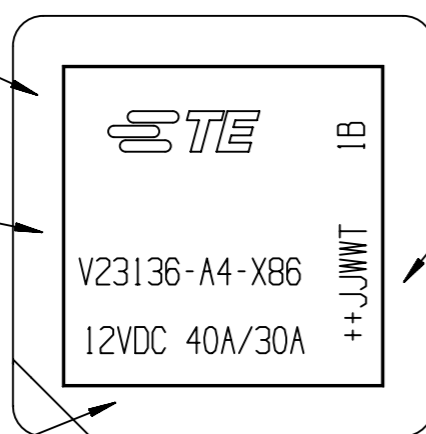

Date Code:  
 ++ = EVORA  
 JJ = Year  
 WW = Week  
 T = Day  
 I = Assembly Line  
 B = Shift

Nominal Voltage and Contact Rating

| PART                      | MATERIAL      | COLOUR                      |
|---------------------------|---------------|-----------------------------|
| Cover                     | PA 66 GF 25   | Black sim. to RAL 9005      |
| Base                      | PA 66 GF 25   | Black sim. to RAL 9005      |
| Coil Terminals 1 and 2    | SE-Cu 57...58 | Pre-tinned Sn 2...6 microns |
| Load terminals 3, 4 and 5 | E-Cu 57...58  | Pre-tinned Sn 2...6 microns |

| PART NUMBER | PART NAME               | COUNTRY OF ORIGIN |
|-------------|-------------------------|-------------------|
| 4-1414992-7 | V23136A0004X086-EV-CBOX | Portugal          |
| 7-1904112-1 | V23136A0004X086-SZ-CBOX | China             |

|  |                        |  |                  |
|--|------------------------|--|------------------|
| PROPRIETARY<br>THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR IT'S CONTENTS IS NOT PERMITTED WITHOUT EXPRESSED WRITTEN AUTHORITY. OFFENDERS WILL BE LIABLE FOR ALL DAMAGES. ALL RIGHTS, INCLUDING RIGHTS CREATED BY REGISTERED PATENT(S) GRANTED FOR A UTILITY MODEL OR DESIGN, ARE RESERVED. |                        | CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD | PAPER SIZE<br>A3 |
| APPLICABLE SPEC.:  |                        | FINISH   |                  |
| TOLERANCE UNLESS SPECIFIED OTHERWISE   |                        | DIMENSIONS APPLY                                 | PLATING          |
| DIMENSIONS IN MM   |                        | SCALE 1:1; 2:1                                   | WEIGHT           |
| DATE 15JUL2015<br>NAME L.Sandoval  |                        | PART NAME<br>Power FA Change Over Relay          |                  |
| LOCATION PE EVORA  |                        | DWG NO.<br>V23136-A0004-X086-CD                  |                  |
| B ECO-19-006975<br>A Initial Release   | 06MAY2019<br>16JUL2015 | HFont<br>L.Sand                                  | SHT.<br>1 OF 1   |
| REV. CHANGE ORDER DATE APP.  |                        | CUSTOMER DRAWING                                 |                  |

