


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2620021802	~

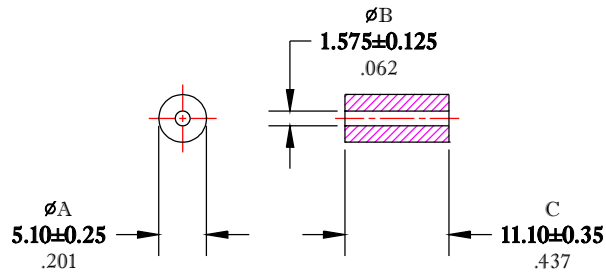

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS						
$\Sigma L/A(\text{mm}^{-1})$	$l_e(\text{mm})$	$A_e(\text{mm}^2)$	$V_e(\text{mm}^3)$	$L_o(\text{nH})$	IMPEDANCE (ohms)	
					10 MHz	100 MHz
0.4817	8.42	17.46	146.86	2.609	TBD MIN.	TBD MIN.
N=1 #22AWG WL=1.50"						

NOTES:

- 1 - BURNISH TO BREAK SHARP EDGES.
- 2 - IMPEDANCE MEASURED ON AN HP4193A, USING AN 04193-87001 PROBE KIT. IMPEDANCE MAY ALSO BE MEASURED ON AN E4991A OR EQUIVALENT USING A 16092A TEST FIXTURE.

FR# 20

FAIR-RITE PRODUCTS CORP.						
TITLE SHIELD BEAD						
DRAWN BY D. FOOTE	DATE 11/17/2020	SIZE B	PART NO. 2620021802		REV. ~	
CHKD BY						
APPRVD BY		SCALE NONE	SHEET 1 of 1			