

www.lemo.com

# FFA.1S.650.CTAC42

## SUMMARY

#### # Wires

Triax 1



Image is for illustrative purpose only

15 **Series** 

Male solder Termination type

IP rating 50

AWG wire size 0.00 - 0.00 Cable Ø 3.20 - 4.20 mm

Status active

Matching parts ERA.1S.650.CTL

### **Download**

Request a quote

Catalog

## **TECHNICAL DETAILS**

## **Mechanics**

Shell Style/Model FFA\*: Straight plug, cable collet

Keying Circular, male

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] **Housing Material** 

brass latch sleeve and mid pieces

Weight 17.78 g

### **Performance**

Configuration 1S.650: 1 Triax (50 Ohm)

Insulator T: PTFE **Rated Current** 6 Amps

## **Specifications**

Contact Type: Triaxial 50 Ohm (Solder)

Contact Dia.: 0.9 mm (0.035in) Vtest: 1200 V (AC), 1700 V (DC)

Impedance: 50 Ohm VSWR: 1.01 + 0.17 \* f/GHz

Cable type: RGT 178, RGT 174, Belden 9222

## **Others**


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >144 hr

# **DRAWINGS**

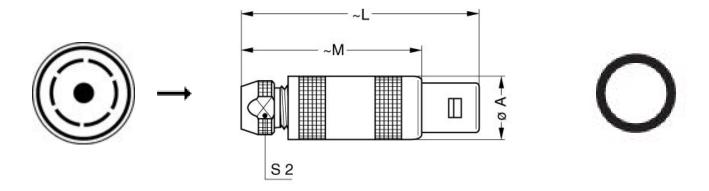

#### **Dimensions**

	A	L	М	S2
mm.	12	42.5	31.5	8.5
in.	0,47	1,67	1,24	0,33

# **RECOMMENDED BY LEMO**

## **Tools**

Spanner wrench: DCD.1S.015.PA085

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

bles	
MO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & m, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his produ ng LEMO components.	a services or use of octs and applications