SIEMENS

Data sheet

3RA2115-0FD15-1BB4

	Fuseless motor starter Direct start 600VAC Size S00 0.35-0.5A 24V DC screw connection For snapping onto 60 mm busbar systems Type of coordination 2 IQ =		
	150 KA Also full fills type Of coordination 1 1NO+1NC (MSP) 1NO (contactor)		
product brand name	SIRIUS		
product designation	non-fused motor starter 3RA2		
design of the product	direct starter		
manufacturer's article number			
 of the supplied contactor 	<u>3RT2015-1BB41</u>		
 of the supplied circuit-breakers 	3RV2011-0FA15		
 of the supplied busbar adapter 	8US1251-5DS10		
of the supplied link module	3RA1921-1DA00		
General technical data			
size of the circuit-breaker	S00		
size of load feeder			
product extension auxiliary switch	Yes		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
degree of pollution	3		
surge voltage resistance rated value	6 kV		
shock resistance according to IEC 60068-2-27 mechanical service life (operating cycles) of contactor typical	6g / 11 ms 30 000 000		
type of assignment	2		
Ambient conditions			
ambient temperature			
during operation	-20 +60 °C		
during storage	-50 +80 °C		
during transport	-55 +80 °C		
Main circuit			
number of poles for main current circuit	3		
number of poles for main current circuit design of the switching contact	3 electromechanical		
design of the switching contact adjustable current response value current of the current-	electromechanical		
design of the switching contact adjustable current response value current of the current- dependent overload release	electromechanical		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage	electromechanical 0.35 0.5 A		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value	electromechanical 0.35 0.5 A 690 V		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum	electromechanical 0.35 0.5 A 690 V 690 V		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating prequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W 24 V		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W 24 V		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value • billio power of magnet coil at DC	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W 24 V 4 W		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W 24 V 4 W 1		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating prequency rated value operating prequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Protective and monitoring functions	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W 24 V 4 W 1 2		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating prequency rated value operating prequency rated value operating prequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Protective and monitoring functions trip class	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W 24 V 4 W 1 2 CLASS 10		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating prequency rated value operating prequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts protective and monitoring functions trip class design of the overload release	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating prequency rated value operating prequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value holding power of magnet coil at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts Protective and monitoring functions trip class design of the overload release response value current of instantaneous short-circuit trip unit <td>electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W 24 V 4 W 1 2 CLASS 10</td>	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W 24 V 4 W 1 2 CLASS 10		
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating prequency rated value operating prequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts protective and monitoring functions trip class design of the overload release	electromechanical 0.35 0.5 A 690 V 690 V 50 60 Hz 0.4 A 120 W 180 W 250 W		

design of the short-circuit trip	m	agnetic			
conditional short-circuit current (lq)					
 at 690 V according to IEC 60947-4-1 rated value 	10	100 000 A			
 at 400 V according to IEC 60947-4-1 rated value 	15	153 000 A			
• at 500 V according to IEC 60947-4-1 rated value	10	100 000 A			
Installation/ mounting/ dimensions	_				
mounting position	Ve	vertical			
fastening method	fo	for snapping onto 60 mm busbar systems			
height	20	200 mm			
width	45	45 mm			
depth	15	155.1 mm			
required spacing					
 for grounded parts 					
— forwards	0	0 mm			
— backwards		0 mm			
— upwards		20 mm			
— at the side		9 mm			
— downwards	10) mm			
 for live parts 					
— forwards	0	0 mm			
— backwards	0	0 mm			
— upwards		20 mm			
— downwards	10	10 mm			
— at the side	9	9 mm			
Connections/ Terminals	_				
type of electrical connection for main current circuit		screw-type terminals			
type of connectable conductor cross-sections for main co stranded	ntacts 0.	0.5 4 mm², 2x (0.75 2.5 mm²)			
connectable conductor cross-section for main contacts fir stranded with core end processing	nely 0.	0.5 2.5 mm²			
Safety related data					
B10 value with high demand rate according to SN 31920		1 000 000			
proportion of dangerous failures with high demand rate according to SN 31920	73	73 %			
protection class IP on the front according to IEC 6052	29 IP	IP20			
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front			
Certificates/ approvals					
General Product Approval		For use in hazard- ous locations	Declaration of Confor	mity	
Confirmation	rnr		~ ~	UK	
	tHL	KEX/	EG-Konf.	UK CA	
Test Certificates Marin	ne / Shipping				
		AN VIC		-	
<u>Type Test Certific-</u> <u>ates/Test Report</u> <u>ate</u>	1400		Lloyd's	633	
	Same P		Kegister		
	ABS	BUREAU	LRS	PRS	
		VERITAS			
		other	Railway	Dangerous Good	
Marine / Shipping			•		
Marine / Shipping					
Marine / Shipping	DNV-GL	<u>Confirmation</u>	Vibration and Shock	Transport Information	

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2115-0FD15-1BB4

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2115-0FD15-1BB4

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-0FD15-1BB4

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2115-0FD15-1BB4&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-0FD15-1BB4/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2115-0FD15-1BB4&objecttype=14&gridview=view1

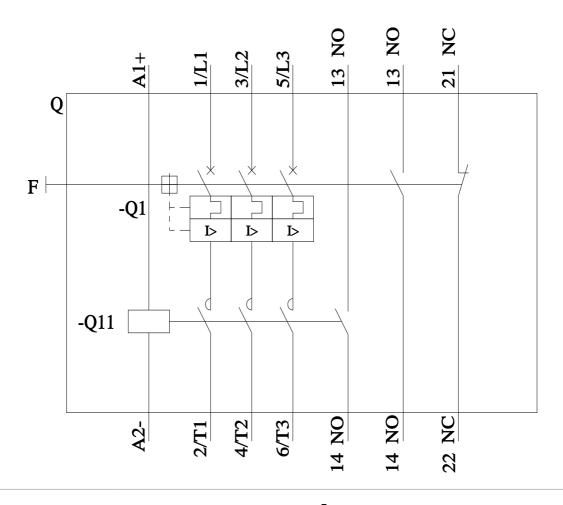

last modified:

12/15/2020 🖸