
## Multilayer Organic (MLO®) Diplexers

# MLO® Diplexers 0805 WLAN/BT





#### MLO® TECHNOLOGY

The 0805 ML0® diplexer is best in class low profile multilayer organic passive device that is based on AVX's patented multilayer organic high density interconnect technology. The MLO® diplexer uses high dielectric constant and low loss materials to realize high Q passive printed elements such as inductors and capacitors in a multilayer stack up. The MLO® diplexers can support multiple wireless standards such as WCDMA, CDMA, WLAN and GSM. These components which are less than 0.5mm in thickness are ideally suited for band switching for dual band systems. All MLO® diplexers are expansion matched to FR4 thereby resulting in improved reliability over standard Si and ceramic devices.


#### **APPLICATIONS**

Multiband applications including WiFi, BT, WiMax, GPS, and cellular bands

#### **LAND GRID ARRAY ADVANTAGES**

- · Low Insertion Loss
- · Excellent Solderability
- · Low Parasitics
- · Matched CTE to PCB

#### **HOW TO ORDER**

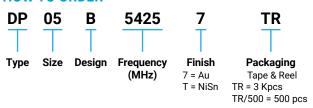



#### **QUALITY INSPECTION**

Finished parts are 100% tested for electrical parameters and visual characteristics.


#### **OPERATING TEMPERATURE**

-40°C to +85°C

#### **TERMINATION**

Finishes available in Ni/Sn, Immersion Sn, Immersion Au and OSP coatings which are compatible with automatic soldering technologies which include reflow, wave soldering, vapor phase and manual.


#### **ORIENTATION IN TAPE**



### **POWER CAPACITY**

4.5W Maximum

#### **COMPONENT DIMENSIONS AND FUNCTIONS**

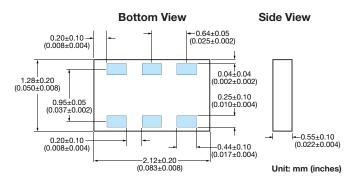


Terminal No.	Terminal Name
1	Low Frequency Port
2	GND
3	High Frequency Port
4	GND
5	Common Port
6	GND

#### PART NUMBER: DP05B54257TR

Specification @ 25°C	
Size [mm(inches)]	2.12 x 1.28 (0.083 x 0.050)
Height [mm(inches)]	0.55 (0.021)
Volume (mm^3)	1.5
Pass Band Range (F1) (MHz)	2450 +/-50MHz
Pass Band Range (F2) (MHz)	5425 +/-525MHz
Insertion Loss (F1) (dB)	-0.5
Insertion Loss (F2) (dB)	-1.0
Attenuation (F1) 4800MHz - 6000MHz (dB)	-36
Attenuation 3 x (F1) (dB)	-31
Attenuation (F2) 1800MHz - 2500MHz (dB)	-26
Attenuation 2 x (F2) (dB)	-13
Attenuation 3 x (F2) (dB)	-15
VSWR (Input @ F1)	1.2
VSWR (Input @ F2)	1.7
VSWR (Lowband @ F1)	1.2
VSWR (Highband @ F2)	1.7



#### S PARAMETER MEASUREMENTS

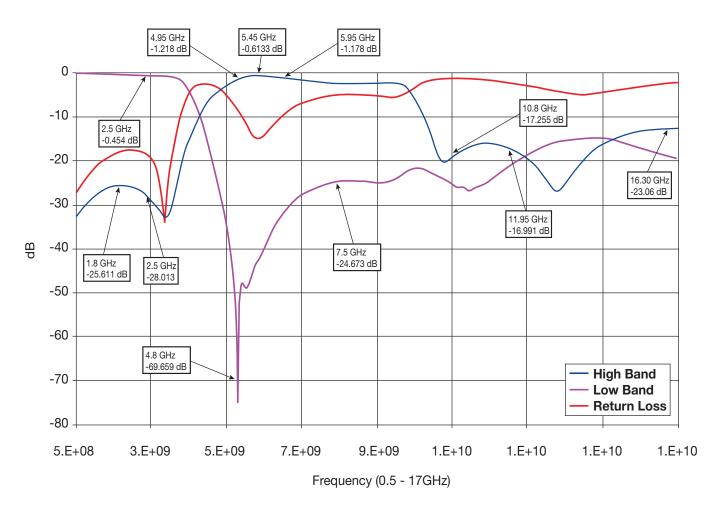

012419