

# PRODUCT DATASHEET CA12012\_LAURA-O-PIN

# LAURA-O-PIN

~40° x 12° oval beam optimized for CREE XP-E. Assembly with white holder, installation tape and location pins.

### **TECHNICAL SPECIFICATIONS:**

Dimensions Height Fastening ROHS compliant 21.6 x 21.6 mm 13.1 mm tape, pin yes 1



### **MATERIAL SPECIFICATIONS:**


Component	Туре	Material	Colour	Finish
LAURA-O	Single lens	PMMA	clear	
LAURA-PIN-XP-HLD-WHT	Holder	PC	white	
ROSE-TAPE	Таре	PU tape	black	

### **ORDERING INFORMATION:**

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA12012_LAURA-O-PIN	Single lens	1440	360	180	7.5
» Box size: 450 x 260 x 160 mm					



PRODUCT DATASHEET CA12012\_LAURA-O-PIN

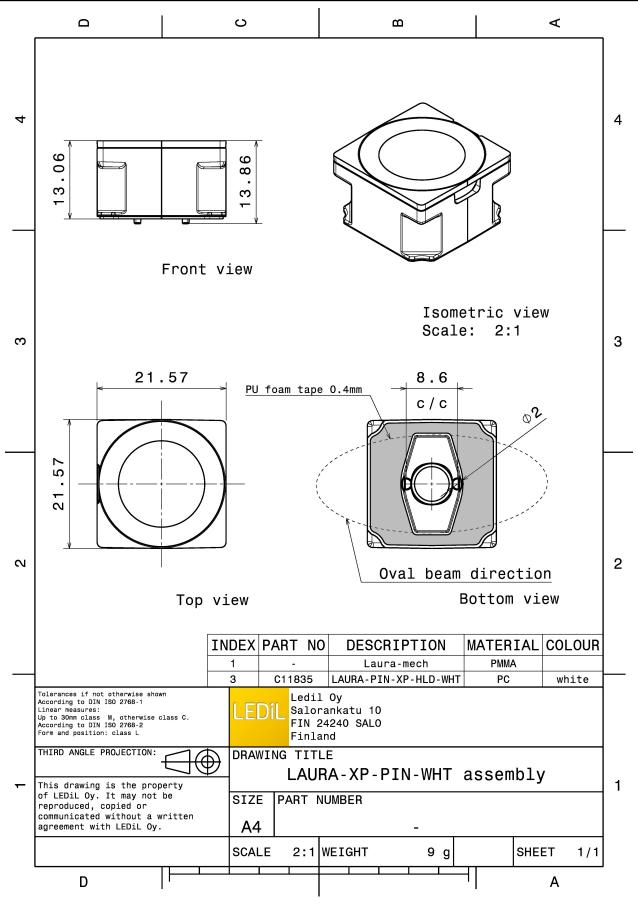

See also our general installation guide: www.ledil.com/installation\_guide



# CREE ≑

LED	XB-D
FWHM / FWTM	39.0 + 11.0°
Efficiency	94 %
Peak intensity	4.8 cd/lm
LEDs/each optic	1
Light colour	White
Required compone	nts:

# CREE ≑

 LED
 XP-E

 FWHM / FWTM
 40.0 + 13.0° / 54.0 + 22.0°

 Efficiency
 91 %

 Peak intensity
 4.8 cd/lm

 LEDs/each optic
 1

 Light colour
 White

 Required components:
 1

# CREE 🔶

LEDXFFWHM / FWTM41Efficiency91Peak intensity6.LEDs/each optic1Light colourWRequired components:





# CREE ≑


LED	XP-G	
FWHM / FWTM	40.0 + 13.0	
Efficiency	91 %	
LEDs/each optic	1	
Light colour	White	
Required components:		



### LUMILEDS

Required components:

LED	LUXEON Rebel	
FWHM / FWTM	41.0 + 12.0° / 56.0 + 24.0°	
Efficiency	90 %	
Peak intensity	5 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components:		

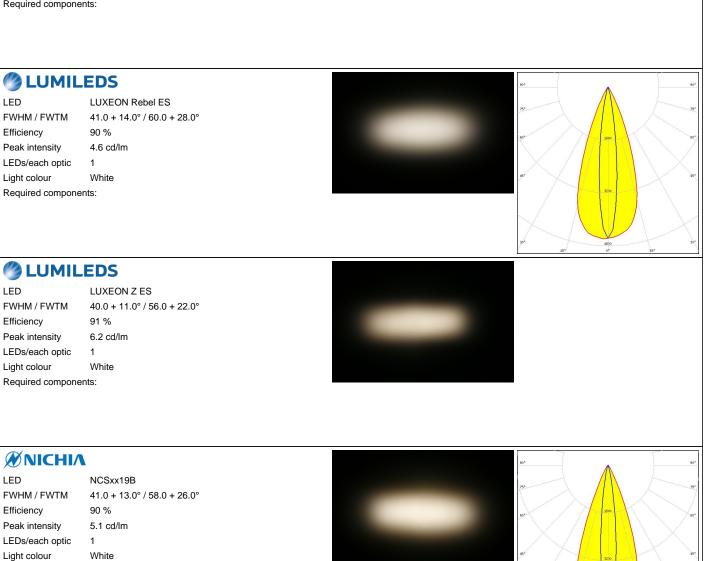




#### OSRAM

LEDOSFWHM / FWTM39.Efficiency87Peak intensity3.8LEDs/each optic1Light colourWhRequired components:

OSLON Square EC 39.0 + 14.0° / 57.0 + 31.0° 87 % 3.8 cd/lm 1 White



#### OSRAM Opto Semiconductors

LEDOFWHM / FWTM4CEfficiency8CPeak intensity5.LEDs/each optic1Light colourWRequired components:

OSLON Square PC 40.0 + 12.0° / 60.0 + 26.0° 88 % 5.1 cd/lm 1 White



#### OSRAM Opto Semiconductore

LEDOSFWHM / FWTM36Efficiency86Peak intensity4.4LEDs/each optic1Light colourWHRequired components:

OSLON SSL 150 36.0 + 10.0° / 23.0 + 52.0° 86 % 4.4 cd/lm 1 White

#### OSRAM Opto Semiconductors

LEDOFWHM / FWTM40Efficiency86Peak intensity4LEDs/each optic1Light colourWRequired components:

OSLON SSL 80 40.0 + 12.0° / 26.0 + 54.0° 86 % 4.5 cd/lm 1 White



OSRAM Opto Semiconductors		
LED	SFH 4715S	
FWHM / FWTM	41.0 + 14.0°	
Efficiency	%	
LEDs/each optic	1	
Light colour	White	
Required compone	ents:	
OSRAM Opto Semiconductors		
LED	SFH 4725S	
FWHM / FWTM	40.0 + 14.0° / 58.0 + 24.0°	
Efficiency	%	
LEDs/each optic	1	
Light colour	White	
Required compone	ents:	
SEOUL		
SEOUL SEMICONDUCTOR		
LED	Z5	
FWHM / FWTM	40.0 + 12.0°	
Efficiency	%	
	1	
LEDs/each optic		
LEDs/each optic Light colour Required compone	White	



#### **PHOTOMETRIC DATA (SIMULATED):**

### LUMILEDS

 LED
 LUXEON H50-2

 FWHM / FWTM
 13.0 + 61.0° / 30.0 + 84.0°

 Efficiency
 81 %

 Peak intensity
 2.7 cd/lm

 LEDs/each optic
 1

 Light colour
 White

 Required components:
 Ket State

### UMILEDS

LED	LU
FWHM / FWTM	67
Efficiency	0
LEDs/each optic	1
Light colour	W
Required components:	

LUXEON IR Domed 150 67.0 + 10.0° / 88.0 + 10.0° 0 % 1 White

### UMILEDS

 LED
 LUXEON IR Domed 60

 FWHM / FWTM
 65.0 + 11.0° / 84.0 + 28.0°

 Efficiency
 90 %

 LEDs/each optic
 1

 Light colour
 White

 Required components:
 Ket State

### UMILEDS

LED FWHM / FWTM Efficiency LEDs/each optic Light colour Required components: LUXEON IR Domed 90 63.0 + 11.0° / 83.0 + 24.0° 90 % 1 White



### PHOTOMETRIC DATA (SIMULATED):

Manager		
<b>ΜΝΙCΗΙΛ</b>		90* 90*
LED	NV4WB35AM	75"
FWHM / FWTM	60.0 + 18.0° / 86.0 + 38.0°	
Efficiency	90 %	60*
Peak intensity	2.2 cd/lm	800
LEDs/each optic	1	
Light colour	White	gy
Required components:		259 259 259
OSRAM Opto Semiconductors		90°
LED	OSLON Square CSSRM2/CSSRM3	75
FWHM / FWTM	62.0 + 11.0° / 84.0 + 24.0°	
Efficiency	91 %	60°
Peak intensity	3.1 cd/lm	
LEDs/each optic	1	
Light colour	White	g
Required components:		200



## PRODUCT DATASHEET CA12012\_LAURA-O-PIN

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc. 228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

#### Local sales and technical support www.ledil.com/ where\_to\_buy

Shipping locations Salo, Finland Hong Kong, China

#### Distribution Partners www.ledil.com/ where\_to\_buy