

EVK75026

GEN3 QVGA

TIME-OF-FLIGHT EVALUATION KIT

QVGA TIME-OF-FLIGHT EVALUATION KIT

EVK75026 is the evaluation platform for Melexis automotive qualified MLX75026 Time-of-Flight (TOF) image sensor. This sensor enables real-time 3D imaging at QVGA resolution with unsurpassed accuracy & sunlight robustness. The evaluation kit is a complete camera that can be connected directly to a PC for real-time visualization, recording and analysis of image data, whilst allowing easy access to many configuration settings. The onboard compute platform enables customer to load their own SW application!

The evaluation kit is available with a 110° horizontal field-of-view and 940 nm automotive qualified VCSEL illumination, designed in collaboration with Lumentum and Lextar.



KEY FEATURES

- MLX75026 QVGA Time-of-Flight sensor
- VCSEL illumination (110° HFOV at 940 nm)
- Modular (interchangeable) platform architecture
- HW & SW reference design
- ☑ ROS compatible including web GUI
- Ø Distance and confidence data at ≥100 FPS
- ✓ Advanced feature support on demand
 - Range de-aliasing
 - Multi-path error correction
 - High dynamic range (HDR)
 - Non-synchronized cross interference rejection
- Small form factor 50 x 40 x 45 mm





ILLUMINATION BOARD

- ✓ 2 VCSELs (110° x 85° FOV @940nm)
- \bigcirc Over temperature protection
- Several state certificate available

TOF SENSOR BOARD

- MLX75026 QVGA (320x240 pixels) TOF sensor array
- 🞯 Optimized optics incl. 38nm optical band-pass filter
- Standard S mount (M12x0.5) lens holder
- SEPROM for calibration parameters

INTERFACE BOARD

- Physical interface between MLX75026 & Zynq Ultrascale+
- Power distribution with 12V input and RJ45 ethernet connector
- Pin header (GPIO, VIN, I²C)
- Gigabit ethernet interface

PROCESSOR BOARD

- 🛇 Xilinx Zynq Ultrascale
- ✓ COTS Trenz TE0820-04-3BE21xL board
- O Proprietary Melexis firmware

PACKAGE CONTENTS

- ✓ 1x HW module
- ✓ 1x external AC/DC 12V PSU
- ✓ 1x ethernet cable
- ✓ Web-based visualizer
- C API, Python & Matlab SDK (+ example code)
- Unique registration key (for documentation, software, updates & support)


ORDERING CODE

Sev K75026-110-940-2

AVAILABILITY

Check **www.melexis.com/en/contact/distributors** for a local distributor in your region.

BLOCK DIAGRAM

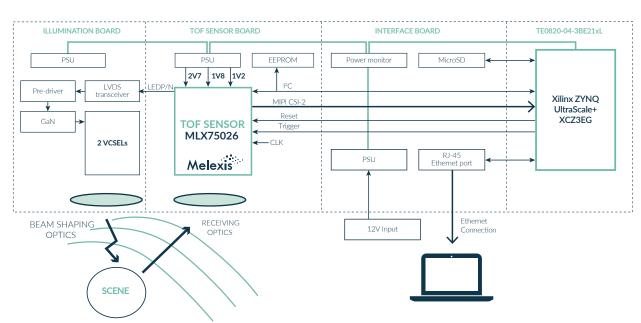

The above information is "as is" and believed to be correct and accurate. Melevis disclaims any and all liability in connection with or arising out of the furnishing, application or use of the information or products, any and all liability, including without limitation, special, consequential or incidental damages; and any and all waranties, express, statutory, ingled, or by description, including waranties of fitness for particular purpose, non-infigurement and mechanizability. Melevis reserves the right to change it any time and without notice. Users should dotain the latest vession of the information to verify it is carrent. Users must intribrit determine the suitability of products are a population, including population, including population, including population, making the level of reliability required and determine whether it is fit or a particular purpose. The products are a particular purpose, population, product are inserted for use in normal commercial applications, using a strate and there is the information to verify populations may apply and operating and product are responsed to the strate and the strate water and there is the strate populations may apply and early time and commercial applications. Unless discussing apply and the early entire and the strate water and the suitable mapplications requiring extended temperature arge and/or unusual environmental equirements. High reliability application, advide and there is the strate is mode and the strate extendes of the integration and controls are used and the strate extendes of the strate and controls are used and the strate extendes of the strate and the strate extendes of the strate and and the strate extendes of the strate extendes of the strate and and there the level is fithed to can be und af