Radial Leaded Ceramic Disc Capacitors

Safety Standard Recognized, C700, Encapsulated, GYAGI KJN Type, X1 440/760 VAC/Y1 250/400/500 VAC (Industrial Grade)

Overview

KEMET's C700, encapsulated radial leaded ceramic disc capacitors are specifically designed for interferencesuppression AC line filtering applications. Having internationally recognized safety certifications, these capacitors are well-suited for applications that require keeping potentially disruptive or damaging line transients and EMI out of susceptible equipment. They are also an ideal solution when needing to suppress line disturbances at the source.

Safety Certified Capacitors are classified as either X and/or Y capacitors. Class X capacitors are primarily used in lineto-line (across-the-line) applications. In this application, there is no danger of electric shock to humans should the capacitor fail, but could result in a risk of fire. The class Y capacitor is primarily used in line-to-ground (line by-pass) applications. In this application, failure of the capacitor could lead to danger of electric shock.

With a working voltage of 440/760 VAC in line-to-line (Class X) and 250/400/500 VAC in line-to-ground (Class Y) applications, these safety capacitors meet the impulse test criteria outlined in IEC Standard 60384. Meeting subclass X1 and Y1 requirements, these devices are certified to withstand impulses up to 4 KV (X1) and 8 KV (Y1) respectively. These encapsulated devices also meet the flame test requirements outlined in UL Standard 94 V-0.

Benefits

- Safety standard recognized (IEC 60384-14)
- Reliable operation up to 125°C
- Class X1 440/760 VAC/ Y1 250/400/500 VAC
- 10mm and 12.5 mm lead spacing
- · Lead(Pb)-free and RoHS Compliant
- Halogen-free
- Capacitance offerings ranging from 8 pF 4.7 nF
- Available capacitance tolerances of ±5%, ±10%, and ±20%
- High-reliability
- · Preformed (crimped) or straight lead configurations
- Non-polar device, minimizing installation concerns
- 100% pure matte tin-plated lead finish, allowing for excellent solderability
- · Encapsulation meets flammability standard UL 94 V-0

Applications

Typical applications include:

- Line-to-line (Class X) filtering
- Line-to-ground (Class Y) filtering
- Antenna coupling
- Primary and secondary coupling (switching power supplies)
- Line disturbances suppression (motors and motor controls, relays, switching power supplies and invertors)







Ordering Information

C7	7	1	U	472	М	S	W	D	Α	Α	7301
Ceramic Series	Body Diameter	Lead Spacing ^{1,2}	Spec.	Capacitance Code (pF)	Capacitance Tolerance	Rated Voltage	Dielectric/ Temp. Char.	Design	Lead Configuration ²	Failure Rate	Packaging (C-Spec)
C7 = Ceramic 700	2 = 9.0 mm 3 = 10.0 mm 4 = 11.0 mm 5 = 12.0mm 6 = 13.0 mm 7 = 14.0 mm 8 = 15.0 mm	1 = 10.0 mm 2 = 12.5 mm	U = Safety	Two significant digits and Number of zeroes	J = ±5% K = ±10% M = ±20%	S = X1 440 VAC/ Y1 400 VAC T = X1 440 VAC/ Y1 250 VAC W = X1 760 VAC/ Y1 500 VAC	S = SL Y = Y5P W = Y5U V = Y5V	D = Disc	A = Straight B = Vertical Kink C = Outside Kink D = Inside Kink	A = N/A	See "Packaging C-Spec Ordering Options Table" below

¹ Capacitor body diameter will limit available lead spacing and packaging options. See "Dimensions" and "Product Ordering Codes and Ratings" sections of this document to determine availability.

² Bulk packaging lead length availability is dependent upon "Lead Configuration" and "Lead Spacing." See "Dimensions" section of this document to verify availability of a specific lead length option. For nonstandard lead length inquiries, please contact KEMET.

Packaging C-Spec Ordering Options Table


Packaging Type	Lead Length (mm) ^{2,3}	Packaging Ordering Code (C-Spec)
Reel	See Note 2	7301
Ammo Pack	See Note 2	7317
	3.5 ±1.0	WL35
Bulk Bag	5.0 ±1.0	WL50
	25.0 mm Minimum	WL25

¹ For nonstandard lead length inquiries, please contact KEMET.

² Lead length for ammo and reel pack packaging is defined by the H and H0 dimensions in Table 3.



Lead Configurations

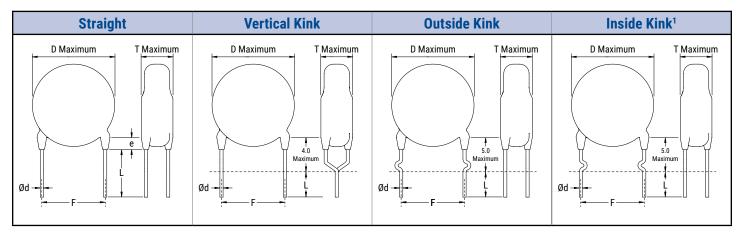

All lead configurations are available on devices with lead spacing of 10 mm and 12.5 mm.

Dimensions – Millimeters

	Lead	F Lead D T		Т	е	Ød	
Lead Configuration	Configuration Ordering Code ¹	Lead Spacing ²	Spacing Tolerance	Body Diameter ²	Body Thickness	Lead Meniscus	Lead Diameter
Straight	А						0.60 ±0.1
Vertical Kink (Preformed)	В	10 10 F	11.0	See Table 1 - "P	See Table 1 - "Product Ordering		
Outside Kink (Preformed)	С	10, 12.5	±1.0	Codes and Ratings"		maximum	
Inside Kink (Preformed)	D						

¹Lead Configuration is identified in the 13th character of the ordering code. See "Lead Configuration" and "Ordering Information" sections of this document for further details.

² Body diameter of capacitor will limit available lead spacing and packaging options. See "Product Ordering Codes and Ratings" sections of this document for further details.



Approval Standard and Certification No.

Safety Standard	Standard No.	Subclass	Working Voltage	Certificate No.
TUV	IEC 60384-14	X1	440 VAC	DE0.466000
ΤŪΫ	160 00304-14	Y1	250 VAC	<u>R50466900</u>
TUV	IEC 60384-14	X1	440 VAC	R50466900
ΙUV	IEC 00384-14	Y1	400 VAC	<u>K50400900</u>
TUV	IEC 60384-14	X1	760 VAC	DE0.466000
ΙUV	IEC 00384-14	Y1	500 VAC	<u>R50466900</u>
UL	UL 60384-14 and	X1	440 VAC	F256200
CAN/CSA	E60384-14	Y1	250 VAC	<u>E356389</u>
UL	UL 60384-14 and	X1	440 VAC	F256200
CAN/CSA	E60384-14	Y1	400 VAC	<u>E356389</u>
UL	UL 60384-14 and	X1	760 VAC	E256290
CAN/CSA	E60384-14	Y1	500 VAC	<u>E356389</u>

These devices are TUV and UL recognized for antenna coupling and AC line-to-line (Class X) and line-to-ground (Class Y) applications per IEC60384-14 and UL 60384-14.

Environmental Compliance

These devices are Halogen-free and RoHS Compliant. They meet all requirements set forth by both EU and China RoHS directives.





Table 1A – Product Ordering Codes and Ratings - X1 440 Y1 400

Dielectric/	КЕМЕТ		Capacitance		Dimensions (mm)	
Temp. Char.	Part Number	Capacitance	Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Lead Spacing
	C72(1)U080JSSD(2)A(3)	8 pF				1	
	C72(1)U100JSSD(2)A(3)	10 pF		9.0			
	C72(1)U150JSSD(2)A(3)	15 pF		210			
	C72(1)U220JSSD(2)A(3)	22 pF					
SL	C73(1)U330JSSD(2)A(3)	33 pF	±5%	10.0			
	C73(1)U390JSSD(2)A(3)	39 pF					
	C74(1)U470JSSD(2)A(3)	47 pF		11.0			
	C74(1)U560JSSD(2)A(3)	56 pF					
	C75(1)U680JSSD(2)A(3)	68 pF		12.0			
	C72(1)U080KSSD(2)A(3)	8 pF					
	C72(1)U100KSSD(2)A(3)	10 pF		9.0			
	C72(1)U150KSSD(2)A(3)	15 pF					
	C72(1)U220KSSD(2)A(3)	22 pF					
SL	C73(1)U330KSSD(2)A(3)	33 pF	±10%	10.0			
	C73(1)U390KSSD(2)A(3)	39 pF					
	C74(1)U470KSSD(2)A(3)	47 pF		11.0			
	C74(1)U560KSSD(2)A(3)	56 pF					
	C75(1)U680KSSD(2)A(3)	68 pF		12.0			
	C72(1)U080KSYD(2)A(3)	8 pF					
	C72(1)U100KSYD(2)A(3)	10 pF					
	C72(1)U150KSYD(2)A(3)	15 pF					
	C72(1)U220KSYD(2)A(3)	22 pF					
	C72(1)U330KSYD(2)A(3)	33 pF					
	C72(1)U390KSYD(2)A(3)	39 pF					
	C72(1)U470KSYD(2)A(3)	47 pF	-				10.0 mm
	C72(1)U560KSYD(2)A(3)	56 pF			6.0	0.60 ± 0.1	12.5 mm
	C72(1)U680KSYD(2)A(3)	68 pF		9.0			
	C72(1)U101KSYD(2)A(3)	100 pF		5.0			
Y5P	C72(1)U151KSYD(2)A(3)	150 pF	±10%				
	C72(1)U181KSYD(2)A(3)	180 pF					
	C72(1)U221KSYD(2)A(3)	220 pF					
	C72(1)U331KSYD(2)A(3)	330 pF					
	C72(1)U361KSYD(2)A(3)	360 pF					
	C72(1)U391KSYD(2)A(3)	390 pF					
	C72(1)U421KSYD(2)A(3)	420 pF					
	C72(1)U471KSYD(2)A(3)	470 pF			-		
	C73(1)U561KSYD(2)A(3)	560 pF		10.0]		
	C73(1)U681KSYD(2)A(3)	680 pF			-		
	C75(1)U102KSYD(2)A(3)	1000 pF		12.0			
	C72(1)U102MSWD(2)A(3)	1000 pF		9.0	-		
	C74(1)U152MSWD(2)A(3)	1500 pF		11.0			
Y5U	C75(1)U222MSWD(2)A(3)	2200 pF	±20%	12.0	-		
100	C77(1)U332MSWD(2)A(3)	3300 pF		14.0	-		
	C78(1)U392MSWD(2)A(3)	3900 pF		15.0	-		
	C78(1)U472MSWD(2)A(3)	4700 pF		15.0	4		
	C72(1)U102MSVD(2)A(3)	1000 pF		9.0			
	C72(1)U152MSVD(2)A(3)	1500 pF		9.0			
Y5V	C73(1)U222MSVD(2)A(3)	2200 pF	±20%	10.0	-		
	C75(1)U332MSVD(2)A(3)	3300 pF		12.0	-		
	C76(1)U392MSVD(2)A(3)	3900 pF		13.0	-		
	C77(1)U472MSVD(2)A(3)	4700 pF		14.0			
Dielectric/ Temp. Char.	KEMET Part Number	Capacitance	Capacitance Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Lead Spacing

(1) To properly complete ordering code, insert the one-digit numeric code to reflect required lead spacing: (Note that select capacitance values and packaging options may limit lead spacing availability. See table above to verify availability.) 1 = 10.0 mm

2 = 12.5 mm

(2) To properly complete ordering code, insert the one-digit character code to reflect the required lead configuration: (See "Lead Configuration" section of this document, page 2, for further details.)

A = Straight

B = Vertical Kink

C = Outside Kink

D = Inside Kink

(3) To properly complete ordering code, enter the four-digit numeric or alphanumeric "Packaging C-Spec Ordering Code." See "Dimensions" section of this document, page 2, for available options.



Table 1B – Product Ordering Codes and Ratings - X1 440 Y1 250

Dielectric/	KEMET		Capacitance		Dimensions (mm)	
Temp. Char.	Part Number	Capacitance	Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Lead Spacing
	C72(1)U080JTSD(2)A(3)	8 pF					
	C72(1)U100JTSD(2)A(3)	10 pF		9.0			
	C72(1)U150JTSD(2)A(3)	15 pF		210			
	C72(1)U220JTSD(2)A(3)	22 pF					
SL	C73(1)U330JTSD(2)A(3)	33 pF	±5%	10.0			
	C73(1)U390JTSD(2)A(3)	39 pF		10.0			
	C74(1)U470JTSD(2)A(3)	47 pF		11.0			
	C74(1)U560JTSD(2)A(3)	56 pF					
	C75(1)U680JTSD(2)A(3)	68 pF		12.0			
	C72(1)U080KTSD(2)A(3)	8 pF					
	C72(1)U100KTSD(2)A(3)	10 pF		9.0			
	C72(1)U150KTSD(2)A(3)	15 pF		210			
	C72(1)U220KTSD(2)A(3)	22 pF					
SL	C73(1)U330KTSD(2)A(3)	33 pF	±10%	10.0			
	C73(1)U390KTSD(2)A(3)	39 pF		10.0			
	C74(1)U470KTSD(2)A(3)	47 pF		11.0			
	C74(1)U560KTSD(2)A(3)	56 pF					
	C75(1)U680KTSD(2)A(3)	68 pF		12.0			
	C72(1)U080KTYD(2)A(3)	8 pF					
	C72(1)U100KTYD(2)A(3)	10 pF					
	C72(1)U150KTYD(2)A(3)	15 pF					
	C72(1)U220KTYD(2)A(3)	22 pF					
	C72(1)U330KTYD(2)A(3)	33 pF					
	C72(1)U390KTYD(2)A(3)	39 pF					
	C72(1)U470KTYD(2)A(3)	47 pF	_				10.0 mm
	C72(1)U560KTYD(2)A(3)	56 pF			6.0	0.60 ± 0.1	12.5 mm
	C72(1)U680KTYD(2)A(3)	68 pF		9.0			12.3 1111
	C72(1)U101KTYD(2)A(3)	100 pF		9.0			
Y5P	C72(1)U151KTYD(2)A(3)	150 pF	±10%				
	C72(1)U181KTYD(2)A(3)	180 pF					
	C72(1)U221KTYD(2)A(3)	220 pF					
	C72(1)U331KTYD(2)A(3)	330 pF					
	C72(1)U361KTYD(2)A(3)	360 pF					
	C72(1)U391KTYD(2)A(3)	390 pF					
	C72(1)U421KTYD(2)A(3)	420 pF					
	C72(1)U471KTYD(2)A(3)	470 pF					
	C73(1)U561KTYD(2)A(3)	560 pF		10.0	1		
	C73(1)U681KTYD(2)A(3)	680 pF		10.0			
	C75(1)U102KTYD(2)A(3)	1000 pF		12.0			
	C72(1)U102MTWD(2)A(3)	1000 pF		9.0			
	C74(1)U152MTWD(2)A(3)	1500 pF		11.0			
Y5U	C75(1)U222MTWD(2)A(3)	2200 pF	±20%	12.0			
130	C77(1)U332MTWD(2)A(3)	3300 pF	120%	14.0			
	C78(1)U392MTWD(2)A(3)	3900 pF		15.0			
	C78(1)U472MTWD(2)A(3)	4700 pF		15.0			
	C72(1)U102MTVD(2)A(3)	1000 pF		9.0			
	C72(1)U152MTVD(2)A(3)	1500 pF		9.0			
Y5V	C73(1)U222MTVD(2)A(3)	2200 pF	±20%	10.0			
104	C75(1)U332MTVD(2)A(3)	3300 pF	±20%	12.0			
	C76(1)U392MTVD(2)A(3)	3900 pF		13.0			
	C77(1)U472MTVD(2)A(3)	4700 pF		14.0			
Dielectric/ Temp. Char.	KEMET Part Number	Capacitance	Capacitance Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Lead Spacing

(1) To properly complete ordering code, insert the one-digit numeric code to reflect required lead spacing: (Note that select capacitance values and packaging options may limit lead spacing availability. See table above to verify availability.) 1 = 10.0 mm

2 = 12.5 mm

(2) To properly complete ordering code, insert the one-digit character code to reflect the required lead configuration: (See "Lead Configuration" section of this document, page 2, for further details.)

A = Straight

B = Vertical Kink

C = Outside Kink

D = Inside Kink

(3) To properly complete ordering code, enter the four-digit numeric or alphanumeric "Packaging C-Spec Ordering Code." See "Dimensions" section of this document, page 2, for available options.



Table 1C – Product Ordering Codes and Ratings - X1 760 Y1 500

Dielectric/	KEMET		Capacitance	Dimensions (mm)			
Temp. Char.	Part Number	Capacitance	Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Lead Spacing
	C72(1)U100JWSD(2)A(3)	10 pF					
	C72(1)U150JWSD(2)A(3)	15 pF		9.0			
	C72(1)U220JWSD(2)A(3)	22 pF					
	C73(1)U330JWSD(2)A(3)	33 pF	±5%	10.0			
	C73(1)U390JWSD(2)A(3)	39 pF					
	C74(1)U470JWSD(2)A(3)	47 pF		11.0			
	C74(1)U560JWSD(2)A(3)	56 pF		10.0			
SL	C75(1)U680JWSD(2)A(3)	68 pF		12.0			
	C72(1)U100KWSD(2)A(3)	10 pF 15 pF		0.0			
	C72(1)U150KWSD(2)A(3) C72(1)U220KWSD(2)A(3)	22 pF		9.0		0.60 ± 0.1	10.0 mm 12.5 mm
	C73(1)U330KWSD(2)A(3)	22 pF 33 pF					
	C73(1)U390KWSD(2)A(3)	39 pF	±10%	10.0			
	C74(1)U470KWSD(2)A(3)	47 pF					
	C74(1)U560KWSD(2)A(3)	56 pF		11.0			
	C75(1)U680KWSD(2)A(3)	68 pF		12.0	-		
	C72(1)U100KWYD(2)A(3)	10 pF		12.0	6.0		
	C72(1)U150KWYD(2)A(3)	15 pF					
	C72(1)U220KWYD(2)A(3)	22 pF					
	C72(1)U330KWYD(2)A(3)	33 pF					
	C72(1)U390KWYD(2)A(3)	39 pF					
	C72(1)U470KWYD(2)A(3)	47 pF	ĺ				
	C72(1)U560KWYD(2)A(3)	56 pF	ĺ				
	C72(1)U680KWYD(2)A(3)	68 pF	1	9.0			
	C72(1)U101KWYD(2)A(3)	100 pF	1	9.0			
Y5P	C72(1)U151KWYD(2)A(3)	150 pF	±10%				
	C72(1)U181KWYD(2)A(3)	180 pF					
	C72(1)U221KWYD(2)A(3)	220 pF					
	C72(1)U331KWYD(2)A(3)	330 pF					
	C72(1)U361KWYD(2)A(3)	360 pF					
	C72(1)U391KWYD(2)A(3)	390 pF					
	C72(1)U471KWYD(2)A(3)	470 pF					
	C73(1)U561KWYD(2)A(3)	560 pF		10.0			
	C73(1)U681KWYD(2)A(3)	680 pF			1		
	C75(1)U102KWYD(2)A(3)	1000 pF		12.0			
Dielectric/ Temp. Char.	KEMET Part Number	Capacitance	Capacitance Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Lead Spacing

(1) To properly complete ordering code, insert the one-digit numeric code to reflect required lead spacing: (Note that select capacitance values and packaging options may limit lead spacing availability. See table above to verify availability.) 1 = 10.0 mm

2 = 12.5 mm

(2) To properly complete ordering code, insert the one-digit character code to reflect the required lead configuration: (See "Lead Configuration" section of this document, page 2, for further details.)

A = Straight

B = Vertical Kink

C = Outside Kink

D = Inside Kink

(3) To properly complete ordering code, enter the four-digit numeric or alphanumeric "Packaging C-Spec Ordering Code." See "Dimensions" section of this document, page 2, for available options.



Table 1C – Product Ordering Codes and Ratings - X1 760 Y1 500 cont.

Dielectric/	KEMET		Capacitance	I)		
Temp. Char.	Part Number	Capacitance	Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Lead Spacing
	C72(1)U221KWWD(2)A(3)	220 pF					
	C72(1)U331KWWD(2)A(3)	330 pF					
	C72(1)U471KWWD(2)A(3)	470 pF		9.0			
	C72(1)U681KWWD(2)A(3)	680 pF					
	C72(1)U102KWWD(2)A(3)	1000 pF					
Y5U	C74(1)U152KWWD(2)A(3)	1500 pF	±10%	11.0			
	C75(1)U222KWWD(2)A(3)	2200 pF		12.0			
	C75(1)U272KWWD(2)A(3)	2700 pF	12.0 14.0 15.0				
	C77(1)U332KWWD(2)A(3)	3300 pF		14.0	_		
	C78(1)U392KWWD(2)A(3)	3900 pF		15.0			
	C78(1)U472KWWD(2)A(3)	4700 pF		6.0	0.60 ± 0.1	10.0 mm	
	C72(1)U221MWWD(2)A(3)	220 pF			0.0	0.00 ± 0.1	12.5 mm
	C72(1)U331MWWD(2)A(3)	330 pF					
	C72(1)U471MWWD(2)A(3)	470 pF		9.0			
	C72(1)U681MWWD(2)A(3)	680 pF					
	C72(1)U102MWWD(2)A(3)	1000 pF					
Y5U	C74(1)U152MWWD(2)A(3)	1500 pF	±20%	11.0			
	C75(1)U222MWWD(2)A(3)	2200 pF		12.0			
	C75(1)U272MWWD(2)A(3)	2700 pF		12.0			
	C77(1)U332MWWD(2)A(3)	3300 pF		14.0			
	C78(1)U392MWWD(2)A(3)	3900 pF		15.0			
	C78(1)U472MWWD(2)A(3)	4700 pF		15.0			
Dielectric/ Temp. Char.	KEMET Part Number	Capacitance	Capacitance Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Lead Spacing

(1) To properly complete ordering code, insert the one-digit numeric code to reflect required lead spacing: (Note that select capacitance values and packaging options may limit lead spacing availability. See table above to verify availability.)

1 = 10.0 mm 2 = 12.5 mm

(2) To properly complete ordering code, insert the one-digit character code to reflect the required lead configuration: (See "Lead Configuration" section of this document, page 2, for further details.)

A = Straight

B = Vertical Kink

C = Outside Kink

D = Inside Kink

(3) To properly complete ordering code, enter the four-digit numeric or alphanumeric "Packaging C-Spec Ordering Code." See "Dimensions" section of this document, page 2, for available options.



Table 2 – Performance & Reliability: Test Methods and Conditions

lte	em	Specification		Test Method				
Operating Tem	perature Range			-40°C to +125°C				
	Between lead wires	No failures		The capacitor shall not be damaged when 4,000 VAC (rms) is applied between the lead wires for 60 seconds.				
Dielectric Strength	Body Insulation	No failures		The terminals (leads) of the capacitor shall be connected together. A metal foil is tightly wrapped around the body of the capacitor at a distance of about 3 to 4 mm from each terminal. The capacitor is then inserted into a container filled with metal balls approximately 1 mm in diameter. 4,000 VAC (rms) is applied for 60 seconds between the capacitor lead wires and metal balls. (charge/discharge current ≤ 50 mA)				
Insulation Re	esistance (IR)	10,000 M	Ω minimum		sistance shall be measure 5 seconds of charging.	d with 500 ±50 VDC		
Сарас	citance	Within speci	fied tolerance					
		Temperature Characteristics	Specification	Characterist	ic Frequency	Voltage		
Dissination F	actor (DF) or Q	Y5P	DF ≤ 2.5%	SL	1 MHz ±20%	5.0 V _{rms} Maximum		
Dissipation i		Y5U/Y5V	DF ≤ 5.0%	Y5P / Y5U / Y5V 1 MHz ±20%				
			Q ≥ 300	The measurement at reference temperature 25°C				
				A capacitance me	easurement is made at ea	ch sten specified [.]		
				Step Temperature				
		Temperature	Capacitance	1	+25 ±2°C			
		Characteristics	Change	2 Minimum operating temperature		temperature		
Temperature (Characteristics	Y5P	Within ±10%	3	+25 ±2°	C		
		Y5U	Within +22%/-56%	4	Maximum operating	temperature		
		Y5V	Within +22%/-82%	5	+25 ±2°	C		
		SL	+350~1,000%	Pretreatment:				
					ed at 85 ±2°C for 1 hour ar ±2 hours before measurer			
	Tensile	-	Lead wire or capacitor body shall not break.		ion in its normal position, h a manner that the axis of force of 10 N is applied t is and acting in a directio	the specimen is held of the termination is o the termination in the		
Terminal Strength	Bending		pacitor body shall preak.	of the specimen. With the termination in its normal position, the specimen is held by its body in such a manner that the axis of the termination is vertical; a mass force of 5 N is then suspended from the end of the termination. The body of the specimen is then inclined within a period of 2 to 3 seconds, through an angle of approximately 90° in the vertical plane and then resumed to its initial position over the same period of time; this operation constitutes one bend. One bend immediately followed by a second bend in the opposite direction.				

¹ "Room Condition" is defined as follows: Temperature: 20 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.



Table 2 – Performance & Reliability: Test Methods and Conditions cont.

lte	m	Specif	ication	Test M	lethod			
-	Appearance		al defect	As shown in the figure below, the molten solder up to 1.5 mm (+5/- epoxy meniscus (root of lead win	•0 mm) from the end of the			
_	IR	1,000 MΩ	Minimum	Duration/Solder Temperature: 3.5´±0.5 seconds/350°C ±10°C or 10 ±1 seconds/260°C ±5°C				
	Dielectric Strength	Per it	tem 1	Thermal Capacitor				
Soldering Effect (Non-Preheat)	Capacitance	Y5P, Y5U and Y SL: within ±2.5	n ±10% 5V: within ±10% 5% or ±0.25 pF, r is larger	 Direction 1.5 to Pretreatment: Capacitor is stored at 85°C ±2°C for 1 hour and then placed at room condition¹ for 24 ±2 hours before initial measurements. Post-treatment: Capacitor is stored for 1 to 2 hours at room condition¹. 				
-	Appearance	No visua	al defect	Steady State Humidity:	Load Humidity:			
		Temperature Characteristics	Capacitance Change					
	Capacitance	Y5P	Within ±10%					
	oupuontanoe	Y5U	Within ±15%	90 to 95% humidity at 40°C	90 to 95% humidity at 40°C			
Biased		Y5V	Within ±30%	$\pm 2^{\circ}$ C for 500 ± 12 hours.	±2°C for 500 ±12 hours with full rated voltage applied.			
Humidity		SL	Within ±5%	Post-treatment: Capacitor is stored for 1 to 2	Post-treatment:			
_	DF	Y5V and Y5U: 7.5% maximum Y5P: 5% maximum		hours at room condition ¹ .	Capacitor is stored for 1 to 2 hours at room condition ¹ .			
	Q	Q ≥	135					
	IR	3,000 MΩ	minimum					
-	Dielectric Strength	No fa	ilures					
	Appearance	No visua	al defect	Impulse Voltage: Each individual 8 kv impulse prior to life testing.				
High	Capacitance Change	SL, Y5P, Y5U Y5V with	within ±20% nin ±30%	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				
Temperature Life	IR	3,000 MΩ	minimum					
	Dielectric Strength	No failures		Capacitors are placed in a circulating air oven for a period of 1,000 hours. The air in the oven is maintained at a temperature of $125^{\circ}C \pm 2$ throughout the test. The capacitors are subjected to 170% of Rated Voltage. Each hour the voltage is increased to AC 1,000 V _{rms} for 0.1 seconds.				

¹ "Room Condition" is defined as follows: Temperature: 20 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.



Table 2 – Performance & Reliability: Test Methods and Conditions cont.

ltem	Specification	Test Method
Flame Test Active Flammability	The capacitor flame extinguishes as follows: 	The capacitor is exposed to a flame for 15 seconds and then removed for 15 seconds. This test is repeated for 5 cycles. $\begin{array}{c} \downarrow \downarrow \downarrow capacitor \\ Flame \\ 20^{\circ} \\ \hline \\ $
Passive Flammability	The burning time should not exceed 30 seconds. The tissue paper should not ignite.	time The capacitor under test is held into a flame and in a position which best promotes burning. Each specimen is exposed to the flame once.

¹ "Room Condition" is defined as follows: Temperature: 20 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.



Soldering and Mounting Information

Soldering:

When soldering this product to a PCB/PWB, do not exceed the solder heat resistance specification of the capacitor. Subjecting this product to excessive heating could reflow the solder joint between the lead and ceramic element and/or may result in thermal shocks that can crack the ceramic element.

When soldering these capacitors with a soldering iron, it should be performed under the following conditions:


- Temperature of iron-tip: 400°C maximum
- Soldering iron wattage: 50 W maximum
- · Soldering time: 3.5 seconds maximum

Cleaning (ultrasonic cleaning):

To perform ultrasonic cleaning, observe the following conditions:

- · Rinse bath capacity: output of 20 watts per liter or less
- · Rinsing time: 5 minute maximum
- Do not vibrate the PCB/PWB directly
- · Excessive ultrasonic cleaning may lead to fatigue destruction of the lead wires


Construction

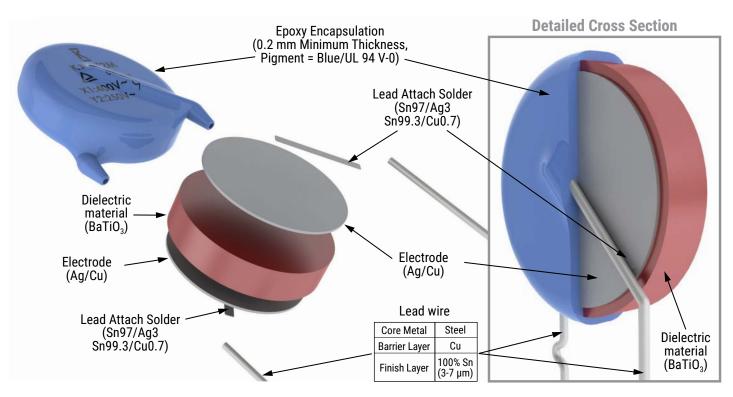



Marking

These capacitors shall be laser marked with KEMET's trademark, type designation, capacitor class, rated voltage, rated capacitance, and capacitance tolerance codes. In addition, all devices are marked with the recognized approval mark and a date/lot code for traceability. Marking will be supplied on one side of the encapsulated capacitor body. All marking shall be legible to allow for clear identification of the component. Marking appears in legible contrast. Illustrated below is an example of the marking format and content.

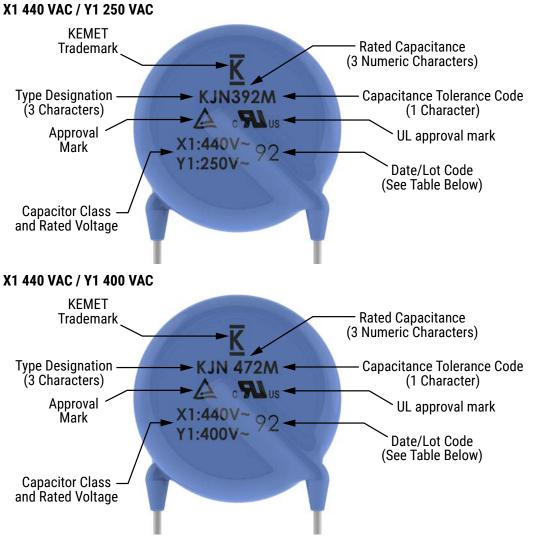


Date/Lot Code e.g., 9D (December 2019, Taiwan)

9	D	-
Last digit of year, e.g., 3 = 2013	Manufacturing Month: 1-9 = Jan - Sept O = October N = November D = December	Manufacturing Location Code (blank): Taiwan C: Dongguan



Marking cont.

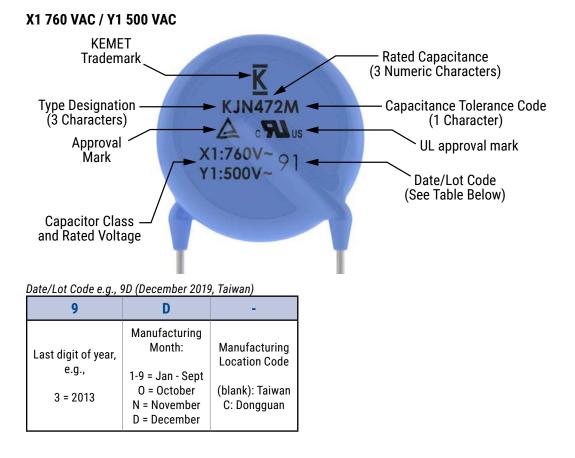



Packaging Quantities

Capacitor		Bulk Bag (Loose)				
Body Diameter (mm)	Body Diameter Code ¹	Lead Length (WL25)	Cut Lead Length (WL35, WL50, WL10			
7.0	0					
8.0	1					
9.0	2					
10.0	3					
11.0	4	200 pieces/bag	500 pieces/bag			
12.0	5					
13.0	6					
14.0	7					
15.0	8					
16.0	9					


¹ The "Body Diameter Code" is located in the third character position of the ordering code. This code identifies the maximum diameter of the capacitor body in millimeters. For more information regarding the ordering code, see "Ordering Information" section of this document.

Lead Spacing	Body Diameter (mm)	Pitch (Carrier Tape)	Body Diameter Code	Reel (7301)	Ammo Pack (7317)	
5	≤ 12.0	12.7	0 - 5	2,000 pieces/reel	1,000 pieces/box	
5	12.0 < D ≤ 16.0	25.4	6 - 9	1,000 pieces/reel	750 pieces/box	
	≤ 12.0	12.7	0 - 5	2,000 pieces/reel	1,000 pieces/box	
7.5	12.0 < D ≤ 15.0	25.4	6 - 8	1,000 pieces/reel	750 pieces/box	
	≥ 16.0	25.4	9	750 pieces/reel	750 pieces/box	
10	≤ 10	25.4	0 - 3	1,000 pieces/reel	1,000 pieces/box	
10	≥ 11	25.4	4 - 9	750 pieces/reel	750 pieces/box	
12.5	≤ 9		0 - 2	1,000 pieces/reel	500 pieces/box	
	≥ 10	25.4	3 - 9	500 pieces/reel	500 pieces/box	




Figure 1 - Ammo/Reel Pack Taping Format

5 mm and 7.5 mm Lead Spacing:

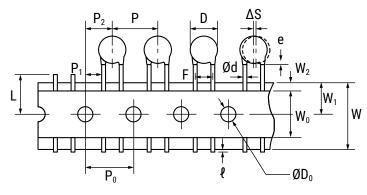

5 mm, 7.5 mm, 10 mm and 12.5 mm Lead Spacing:

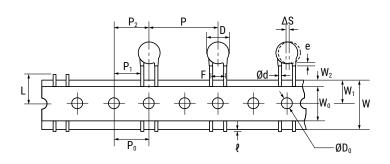

For All Lead Spacing:

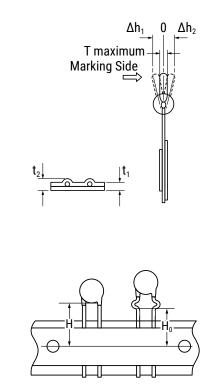


Table 3 – Ammo/Reel Pack Taping Specifications

Lead Spacing	1	5 mm			7.5 mm			10 mm		12.5 mm			
Lead Style		Straight		Prefo	Preformed ¹ Straight		ight	Preformed ¹		Straight	Preformed ¹	Straight	Preformed ¹
ltem	Symbol		Dimensions (mm)										
Lead Spacing	F	5.0 ±1.0				7.5 ±1.0				10.0 ±1.0		12.5 ±1.0	
Component Pitch	Р	12.7 ±1.0	25.4 ±2.0	12.7 ±1.0	25.4 ±2.0	12.7 ±1.0	25.4 ±2.0	12.7 ±1.0	25.4 ±2.0	25.4 ±2.0		25.4 ±2.0	
Sprocket Hole Pitch	P ₀	12.7 ±0.3				12.7 ±0.3				12.7 ±0.3		12.7 ±0.3	
Sprocket Hole Center to Component Center	P ₂	6.35 ±1.5	12.7 ±1.5	6.35 ±1.5	12.7 ±1.5	6.35 ±1.5	12.7 ±1.5	6.35 ±1.5	12.7 ±1.5	12.7 ±1.5		12.7 ±1.5	
Sprocket Hole Center to Lead Center	P ₁	3.85 ±0.7	10.2 ±1.5	3.85±0.7	10.2 ±1.5	2.6 ±0.7	8.95 ±1.5	2.6 ±0.7	8.95 ±1.5	7.7 ±1.5		6.45 ±1.5	
Body Diameter	D	See "Product Ordering Codes and Ratings" section of this document.											
Component Alignment (side/side)	ΔS	0 ±2.0											
Carrier Tape Width	W		18.0 +1.0/-0.5										
Sprocket Hole Position	W ₁	9.0 ±0.5											

¹ Preformed (crimped) lead configurations include vertical kink, outside kink, and inside kink. See "Lead Configurations" and "Ordering Information" sections of this document for further details.

²Also referred to as "lead length" in this document.



Table 3 – Ammo Pack Taping Specifications cont.

Lead Spacing		5 n	nm	7.5	mm	10 mm		12.5 mm					
Lead Style		Straight	Preformed ¹	Straight	Preformed ¹	Straight	Preformed ¹	Straight	Preformed ¹				
ltem	Symbol		Dimensions (mm)										
Height to Seating Plane ² (preformed leads ¹)	H _o	N/A	16.0 +2.0/-0	N/A	16.0 +2.0/-0	N/A	16.0 +2.0/-0	N/A	16.0 +2.0/-0				
Height to SeatingPlane ² (straight leads)	н	20.0 +1.5/-1.0	N/A	20.0 +1.5/-1.0	N/A	20.0 +1.5/-1.0	N/A	20.0 +1.5/-1.0	N/A				
Lead Protrusion	ę		2.0 maximum										
Diameter of Sprocket Hole	D ₀		4.0 ±0.2										
Lead Diameter	φd		0.6 ±0.1										
Carrier Tape Thickness	t,		0.6 ±0.3										
Total Thickness (Carrier Tape, Hold- Down Tape and Lead)	t ₂	1.5 maximum											
Component Alignment	Δh ₁												
(front/back)	Δh ₂		2.0 maximum										
Cut Out Length	L	11.0 maximum											
Hold-Down Tape Width	W _o	10.0 minimum											
Hold-Down Tape Position	W2	3.0 maximum											
Coating Extension on Leads (meniscus)	e	3.0 maximum for straight lead; not to exceed the bend for preformed1 lead configurations.											
Body Thickness	т	8.0 maximum											

¹ Preformed (crimped) lead configurations include vertical kink, outside kink, and inside kink. See "Lead Configurations" and "Ordering Information" sections of this document for further details.

²Also referred to as "lead length" in this document.

Application Notes:

Storage and Operating Conditions:


The Insulating coating of these devices does not form an air and moisture tight seal. Avoid exposure to moisture and do not use or store these devices in a corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. Before cleaning, bonding or molding these devices, it is important to verify that your process does not affect product quality and performance. KEMET recommends testing and evaluating the performance of a cleaned, bonded or molded product prior to implementing and/or qualifying any of these processes. Store the capacitors where the temperature and relative humidity do not exceed 40 degrees centigrade and 70% respectively. For optimum solderability, capacitor stock should be used promptly, preferably within 6 months of receipt.

Working Voltage:

Application voltage (Vp-p or Vo-p) must not exceed the voltage rating of the capacitor. Irregular voltages can be generated for a transient period of time when voltage is initially applied and/or removed from a circuit. It is important to choose a capacitor with a voltage rating greater than or equal to these irregular voltages.



Application Notes (cont.):

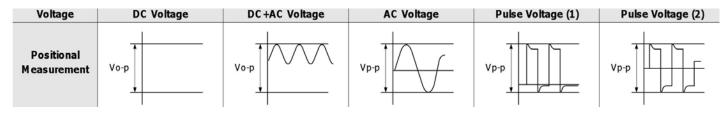

Operating Temperature and Self-Generating Heat:

The surface temperature of a capacitor should be kept below the upper limit of its rated operating temperature range. Be sure to take into account the heat generated by the capacitor itself. When the capacitor is used in a high-frequency current, pulse current or similar current, it may self-generate heat due to dielectric loss. Temperature rise due to self-generated heating should not exceed 20°C (while operated at an atmosphere temperature of 25°C).

Handling - Vibration and Impact:

Do not expose these devices or their leads to excessive shock or vibration during use.

FAILURE TO FOLLOW THE ABOVE CAUTIONS MAY RESULT, WORST CASE, IN A SHORT CIRCUIT AND CAUSE FUMING OR PARTIAL DISPERSION WHEN THE PRODUCT IS USED.



KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

KEMET is a registered trademark of KEMET Electronics Corporation.